




ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00159	Connector, 6P mini DIN male, molding style, brass, nickel plating	1	
2	30-00026	Wire, 6C, 20 AWG, UL2464, 300 V, 80 C, 7.0 mm, shielded, VW-1, PVC, 79A	1	
3	24-00069	Overmold, PVC	1	black
4	Heat Shrink	Heat shrink tube, Ø7.0, 105° C, L=10 ±2 mm	1	black
5	Heat Shrink	Heat shrink tube, Ø1.0, 105° C, L=30 ±5 mm	1	black, covers drain wire
6	Tie	Twist tie	2	black

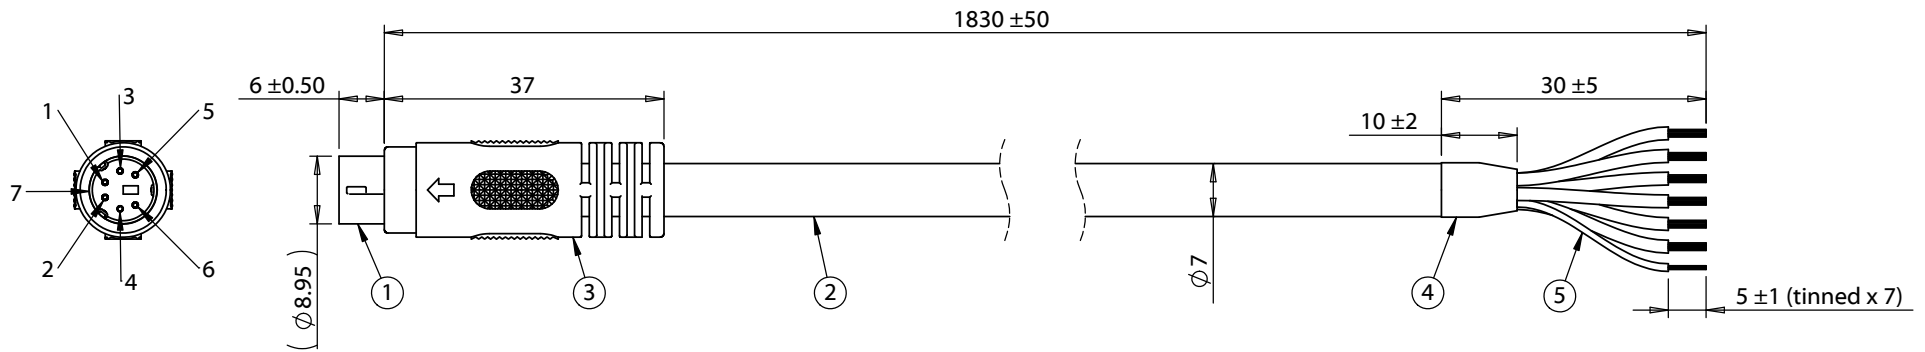

Wiring Diagram	
50-00159	wire color
1	red
2	white
3	black
4	brown
5	orange
6	yellow
7	drain

Notes:
Functionally equivalent components may be substituted

Electrical requirements: 2 A, 12 Vdc

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	3/09/2011	Initial release	GL <small>Digitally signed by GL Date: 2017.06.08 11:11:21 -07'00'</small>	RoHS and REACH compliant	
			AW <small>Digitally signed by AW Date: 2020.09.21 11:33:27 -07'00'</small>	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 6P mini-DIN male 50-00159, to stripped tinned, 20 AWG, UL2464 30-00026, shielded	
Scale: 1:1		Size: A Part number: 10-00422		 Sheet 1 of 1	