



DETAIL Y



MATERIALS:

- HOUSING-PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK.
 - CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.
 - SHIELD-0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.
Current = 1.5A max

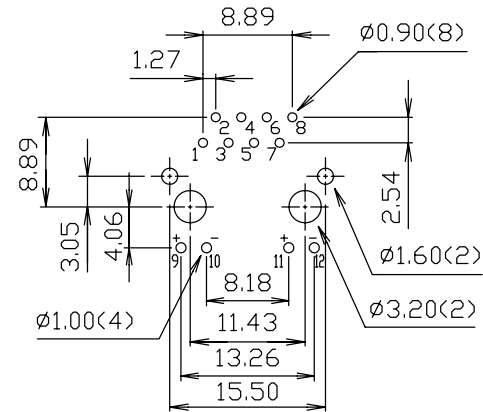

PC Board Layout Ref.

Ordering Information

| | | | | | | |
|--------|-----------|----------|-------|---------------------------------|--------------------|---|
| AJT33L | 8 | 8 | 1 | X-0 | X | 4 |
| Type | Positions | Contacts | Ports | Plating 3 = 30u" 4 = 50u" | Top & Side Tabs | |

| LED1 | LED2 | LED1 | LED2 |
|------------|--------|-------------|---------|
| 1 = Yellow | Green | 5 = Green | Red |
| 2 = Green | Green | 6 = Red | Green |
| 3 = Green | Yellow | 7 = Yellow | Yellow |
| 4 = Green | Orange | 8 = Grn/Ylw | Grn/Ylw |

***Note:** AJT33L has replaced the AJT30L series.
Pricing and specifications subject to change.
Please review before ordering.

| |
|--|
| Tolerance unless otherwise specified |
| .0 ± .25 |
| .00 ± .13 |
| .000 ± .05 |

| | |
|--|---|
| | P/N: AJT33L881X-0X4 * |
| | Desc.: Side entry, shielded, LED, thru hole modular jack Date: 5-30-18 Dimensions in mm Drawn By: Donna Mears |