


RECOMMENDED HOLE PATTERN,

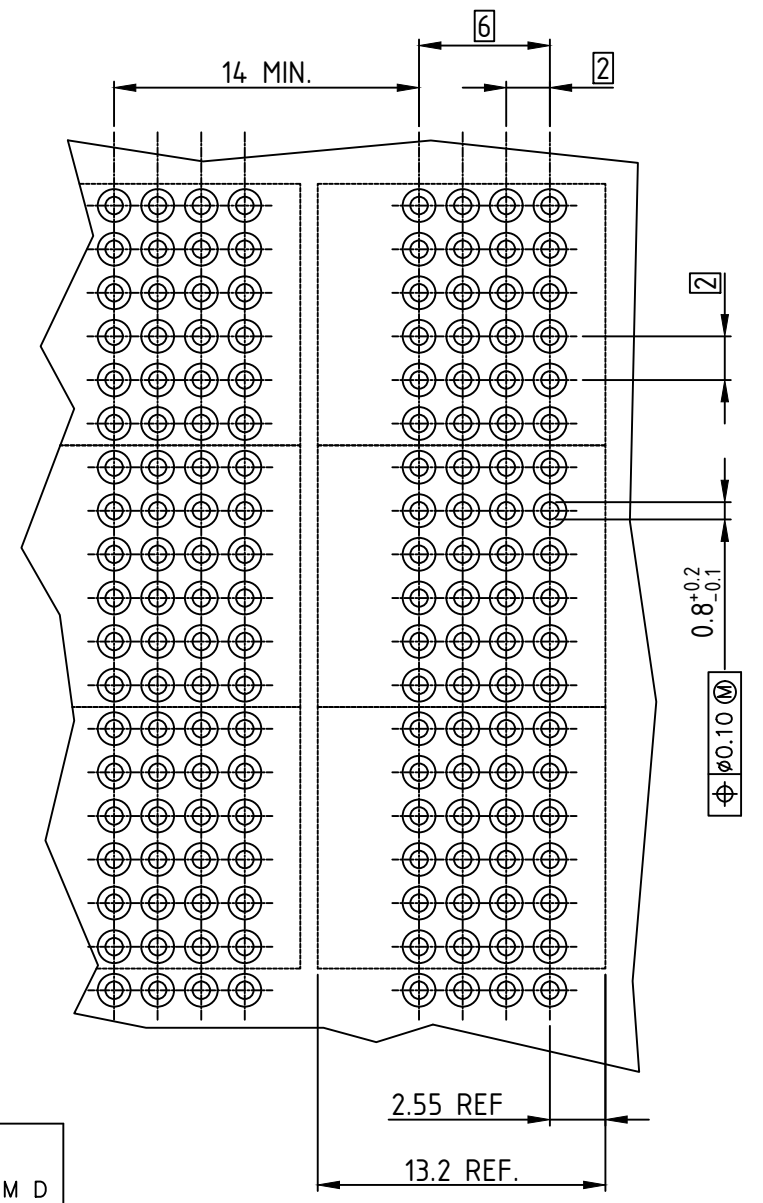


COMPONENT SIDE.

NOTES:

1. MATERIAL : BODY : LCP UL94-V0
: CONTACT : COPPER ALLOY.
2. FOR PLATING PERFORMANCE REFER DRAWING # 10159408 $\triangle G$
3. LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER CONNECTOR.
4. LOAD IN THIS DIRECTION 15 NEWTON MAXIMUM PER CONNECTOR.
5. TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD THE USE OF A FIXTURE IS RECOMMENDED.
6. PRODUCT MARKING: ERICSSON PARTNUMBER & BATCH I.D.
7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47- 0004
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
9. A $\triangle G$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

DASH NR	CONFIGURATION						PCB THICKN.	DIM A	DIM B	DIM C	DIM D
	ROW #	6	5	4	3	2					
85698-XY YLF $\triangle G$	D	+	+	+	+	+	2.4	14.14	3.50	0.54	17.64
	C	+	+	+	+	+					
	B	+	+	+	+	+					
	A	+	+	+	+	+					
" + " POSITION LOADED											

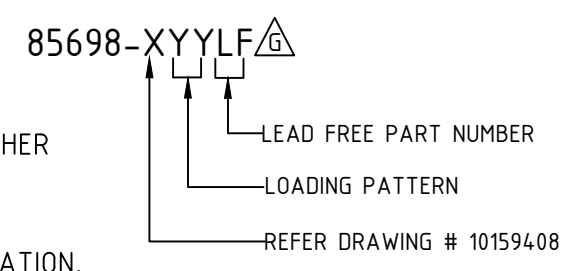

mat'l. code				surface <input checked="" type="checkbox"/> ISO 1302		tolerance <input checked="" type="checkbox"/> ISO 406		projection <input checked="" type="checkbox"/> ISO 1101		product family	
ltr				tolerances unless otherwise specified		mm		METRAL		title	
E	DG08-0171	TER	2008-09-10	angles	.X±0.3	mm		STB SIGN RCP		sheet 1 of 1	
F	DG10-0294	CENH	2010-07-20	linear	.XX±0.13	mm		STB + WAFER 12 mm		size	
G	ELX-I-38655	MINI	2020-10-16	0°±2°	.XXX±0.050	scale -		dwg no		A3	
dr				P. HENDRIKSE		1998-04-03		Amphenol FCI		85698	
enrg				ARUN		2020-10-16		type		Product Customer Drawing	
chr				ALEX BABU		2020-10-16		type		Product Customer Drawing	
appd				SANJO		2020-10-16		type		Product Customer Drawing	
sheet index		revision		G							
		sheet		1							