



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.  
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED  
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.  
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY


PART NO.

**RFT-1203-1P**

REV	DESCRIPTION	DWN	DATE	APPROVED
D	SEPARATE BODY	CZS	10/27/97	R. RICE
E	CHANGE TO KNURLED FER STUD / CHG DIE ID	CZS	9/22/99	R. RICE
F	CHANGE CONTACT BARB AND INSULATOR I.D. TO A THRU HOLE	JDM	8/15/00	J.D. Mc
G	MODIFY PIN, FERULE STUD & STRIPPING DIMENSIONS	CZS	4/18/06	J.D. Mc

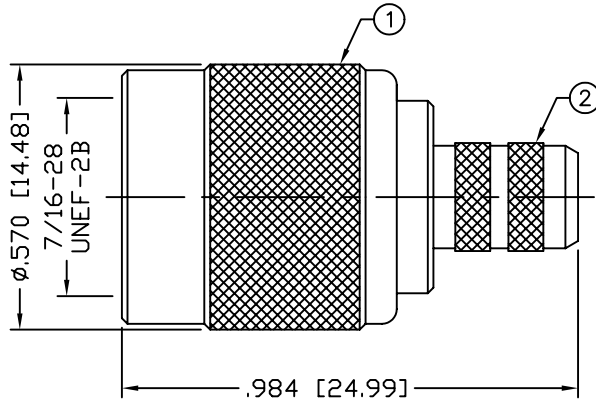


RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .255"

SPECIFICATIONS:

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-7 GHz  
 WORKING VOLTAGE: 500 V rms @ sea level  
 INSULATION RESISTANCE: 5k M ohms min.  
 TEMPERATURE RANGE: -65°C TO +85°C  
 FOR ANTENNA SPECIALIST K214 & PRO-FLEX 800, TIMES AA3096 CABLE

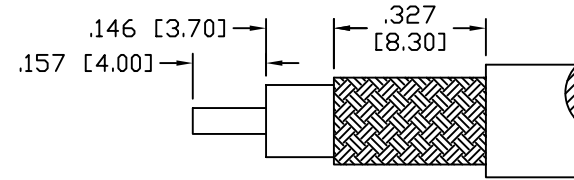

RECOMMENDED STRIPPING DIMENSIONS

1	SHELL	1	BRASS	NICKEL, 100µ <sup>2</sup>	000486	
2	BODY	1	BRASS	NICKEL, 100µ <sup>2</sup>		
3	INSULATOR	1	DELTRIN	----		
4	GASKET	1	RUBBER	----		
5	RETAINING RING	1	BRASS	NICKEL, 100µ <sup>2</sup>		
6	RING	1	DELTRIN	----		
7	WASHER	1	BRASS	NICKEL, 100µ <sup>2</sup>		
8	PIN	1	BRASS	GOLD, 3µ <sup>2</sup>		
9	FERRULE	1	BRASS	NICKEL, 100µ <sup>2</sup>		
10					DRAWN	
11					C. ZUNIGA	4/18/06
12					CHECKED	
13					ORJ DRAWN	
14					C. JONES	7/27/92
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]  
 UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS	DIAMETER
----------	----------

**RF connectors**  
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 (858) 549-6345 FAX

**TNC PLUG, CRIMP**

SIZE A	CABLE GROUP P	DWG NO. RFT-1203-1P	REV G
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1