



NOTES:

1. MATERIALS AND FINISHES:
 BODY, BARREL, FERRULE - BRASS, NICKEL PLATING
 CONTACT - PHOSPHOR BRONZE, GOLD PLATING
 INSULATOR - PTFE
2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: DC - 6 GHz
3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65° C TO +165° C
4. CRIMPED FERRULE
 HEX CRIMP SIZE .429"
5. CRIMPED CONTACT PIN
 HEX CRIMP SIZE .118" FOR ULTRAFLEX CABLE ONLY.





THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG	29-JAN-15	2859	JN

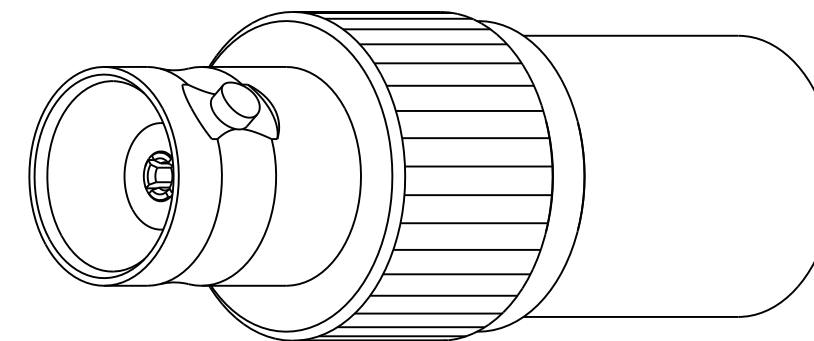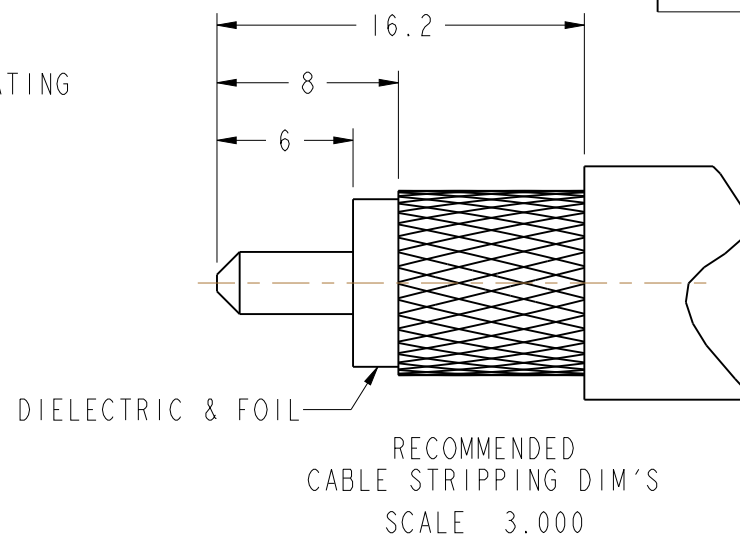

SCALE 3.000

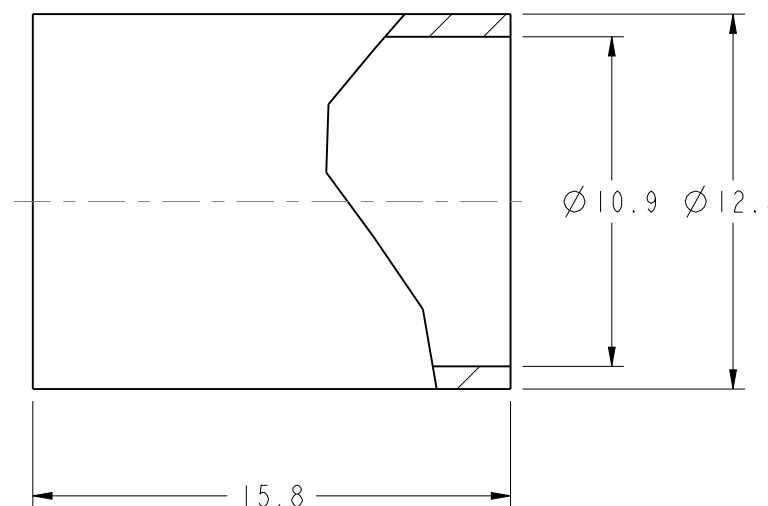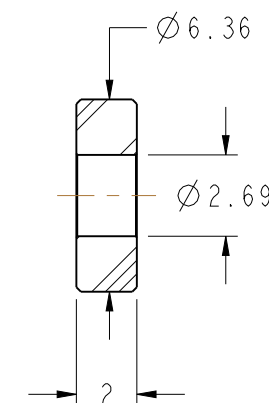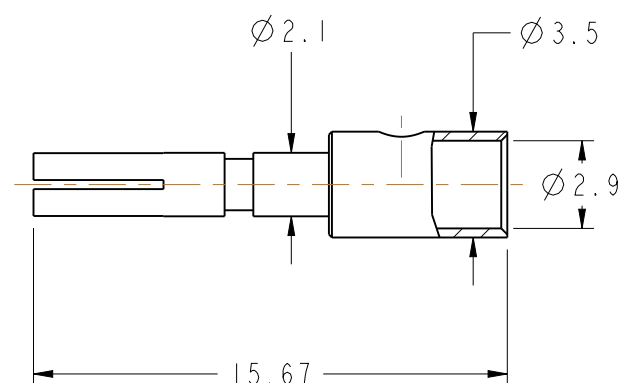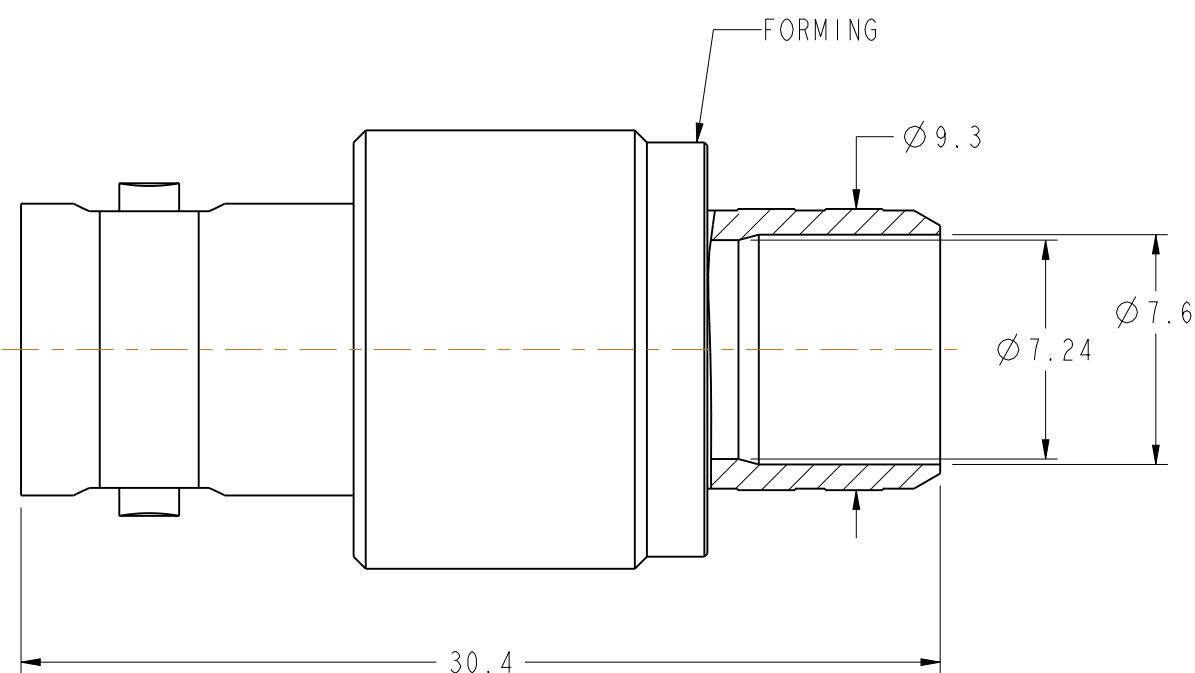

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	
REFERENCE	B6121A6-NT3G-LMR400-50
FINISH	

DRAWN	R.MAO	DATE	18-Dec-14
ENGINEER	R.MAO	DATE	18-Dec-14
APPROVED		DATE	
CAD FILE			

TITLE	
BNC CRIMP JACK (FOR LMR-400-UF)	
SCALE: 4.0:1.0	SHEET 3 OF 3
DWG SIZE B	REV A

Amphenol Connex	
DRAWING NO.	
ITEM NO.	
PART NO. 112995	