1-1903130-3 <

Dynamic Series | Dynamic 1000 Series

TE Internal #: 1-1903130-3 Housing, Housing for Male Terminals, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 1000 Series

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >



Receptacle and Tab Housing: 2.5 mm Pitch, 250V

Connector Product Type: Housing

Connector & Housing Type: Housing for Male Terminals

Connector System: Wire-to-Wire

Number of Positions: 6

Centerline (Pitch): 2.5 mm [.098 in]

All Receptacle and Tab Housing: 2.5 mm Pitch, 250V (59)



Features

Product Type Features

Connector Product Type	Housing	
Connector & Housing Type	Housing for Male Terminals	
Connector System	Wire-to-Wire	
Sealable	No	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Number of Positions	6	
Number of Rows	2	
Body Features		
Primary Product Color	Black	
Termination Features		

C For support call+1 800 522 6752

07/30/2023 12:23PM | Page 1

Housing, Housing for Male Terminals, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 1000 Series



Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	2.5 mm[.098 in]
Dimensions	
Row-to-Row Spacing	3.3 mm[.129 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Signal
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Housing, Housing for Male Terminals, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 1000 Series




Compatible Parts



Also in the Series | Dynamic 1000 Series

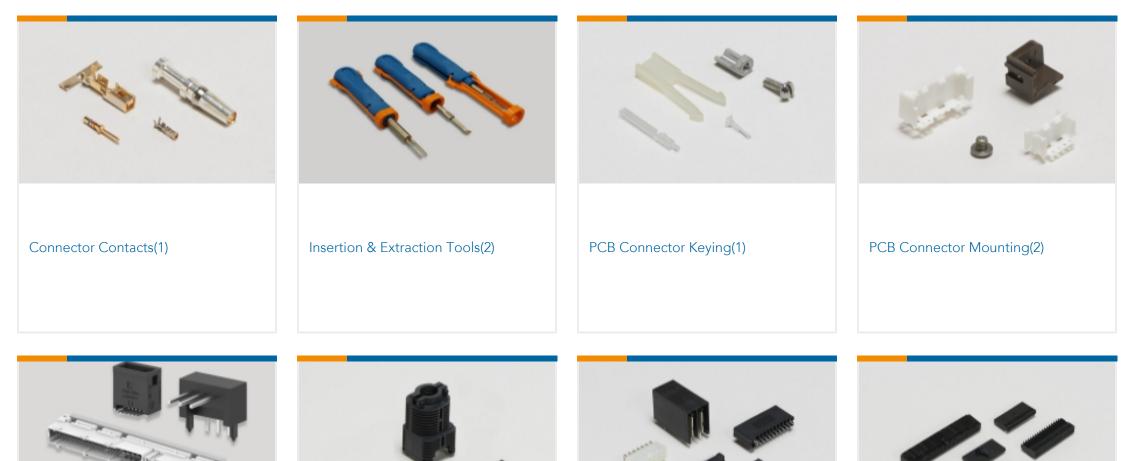

Planting .	sa 🔷		
PCB Headers & Receptacles(173)	Rectangular Connector Housings(2)	Standard Rectangular Connectors(1)	Wire-to-Board Connector Assemblies & Housings(157)

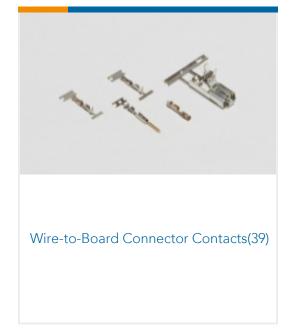

Customers Also Bought

Housing, Housing for Male Terminals, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 1000 Series





TE Part #1-1871465-2 Receptacle and Tab Housing: 2.5 mm Pitch, 250V

Documents

Product Drawings DYNAMIC 1200D TAB HSG 6P F/H

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1903130-3_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1903130-3_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1903130-3_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

Japanese

1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

English

Product Specifications

Application Specification

English

Product Environmental Compliance MD_1-1903130-3_052420181238_dmtec

English

MD_1-1903130-3_052420181238_dmtec

English

Instruction Sheets

Instruction Sheet (non U.S.)

& For support call+1 800 522 6752

Housing, Housing for Male Terminals, Wire-to-Wire, 6 Position, .098 in [2.5 mm] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 1000 Series



English
Agency Approvals
TUV Certificate
English