

Data sheet

Order No.: 1110596

Type: LPC 2,5/13-ST-5,08

PCB connector, Lever Push-in connection



The figure shows an 10-position version

1 Main features



- | | | | |
|---------------------------|--------------------------|------------------------|---------------------|
| • No. of pos. | 13 | • Nominal current | 16 A |
| • Conductor cross section | 2.5 mm ² | • Nominal voltage | 320 V |
| • Color | green (6021) | • Connection direction | 0 ° |
| • Pitch | 5.08 mm | • Type of packaging | packed in cardboard |
| • Connection method | Lever Push-in connection | | |

2 Your advantages

- ✓ Tool-free lever principle enables time-saving connection and release of conductors with/without ferrules
- ✓ Clear lever positions provide reliable feedback on opened or closed clamping spaces
- ✓ Time-saving push-in connection when lever is closed
- ✓ Quick and convenient testing using integrated test option



Make sure you always use the latest documentation.

It can be downloaded at: phoenixcontact.net/product/1110596

3 Table of contents

| | | |
|----|---|----|
| 1 | Main features..... | 1 |
| 2 | Your advantages | 1 |
| 3 | Table of contents | 2 |
| 4 | 3D model in PDF can be activated (Acrobat Reader only)..... | 3 |
| 5 | General Technical Data | 4 |
| 6 | Mounting..... | 5 |
| 7 | Conductor connection | 6 |
| 8 | Material properties..... | 7 |
| 9 | Dimensions..... | 8 |
| 10 | Series drawing..... | 9 |
| 11 | Product notes | 10 |
| 12 | Packaging information | 10 |
| 13 | Application..... | 10 |
| 14 | General tests | 11 |
| 15 | Mechanical tests..... | 11 |
| 16 | Insertion and withdrawal forces | 13 |
| 17 | Electrical tests | 14 |
| 18 | Current carrying capacity/derating curves | 15 |
| 19 | Environmental and durability tests | 16 |
| 20 | Classification for connectors..... | 16 |
| 21 | Commercial Data..... | 17 |
| 22 | Accessories..... | 17 |
| 23 | Combination tests..... | 18 |

1110596 LPC 2,5/13-ST-5,08

4 3D model in PDF can be activated (Acrobat Reader only)



1110596 LPC 2,5/13-ST-5,08**5 General Technical Data****5.1 item properties**

| | |
|--|--------------------------|
| Order No. | 1110596 |
| Type | LPC 2,5/13-ST-5,08 |
| Connector system | CLASSIC COMBICON |
| Product type | PCB connector |
| Type of contact | Female connector |
| Range of articles | LPC 2,5/...-ST |
| Pitch | 5.08 mm |
| Number of positions | 13 |
| Number of levels | 1 |
| Connection method | Lever Push-in connection |
| Connection direction of the conductor to plug-in direction | 0 ° |

1110596 LPC 2,5/13-ST-5,08

6 Mounting

6.1 Flange mounting

| | |
|-----------------|---------|
| | |
| Type of locking | without |
| Mounting flange | without |

1110596 LPC 2,5/13-ST-5,08**7 Conductor connection****7.1 Connection capacity**

| | |
|--|---|
| Nominal cross section | 2.5 mm ² |
| Conductor cross section, rigid | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section, flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm ² ... 2.5 mm ² (Stripping length: 7 mm ... 12 mm) |
| Conductor cross section flexible, with ferrule with plastic sleeve | 0.25 mm ² ... 2.5 mm ² (Stripping length: 7 mm ... 12 mm) |
| 2 conductors with the same cross section flexible with TWIN ferrule and plastic sleeve | 0.5 mm ² ... 1 mm ² (Stripping length: 7 mm ... 12 mm) |
| Cylindrical gauge a x b / diameter | 2.8 mm x 2.0 mm / 2.4 mm |
| Stripping length | 10 mm |

7.2 Connection capacity AWG

| | |
|-----------------------------|-----------|
| Conductor cross section AWG | 26 ... 12 |
|-----------------------------|-----------|

1110596 LPC 2,5/13-ST-5,08**8 Material properties****8.1 Material of metal parts**

| | |
|-------------------------|---|
| Note | WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material | Cu alloy |
| Terminal point surface | Tin (4 - 8 µm Sn) |
| Surface contact area | Tin (4 - 8 µm Sn) |
| Surface characteristics | hot-dip tin-plated |

8.2 Material of plastic parts


| | Housing | Actuation element |
|---|--------------|-------------------|
| Color | green (6021) | orange (2003) |
| Insulating material | PA | PA GF |
| Insulating material group | I | I |
| CTI according to IEC 60112 | 600 | 600 |
| Flammability rating according to UL 94 | V0 | V0 |
| Glow wire flammability index GWFI according to EN 60695-2-12 | 850 | |
| Glow wire ignition temperature GWIT according to EN 60695-2-13 | 775 | |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C | |

1110596 LPC 2,5/13-ST-5,08**9 Dimensions****9.1 Dimensions for the product**

| | |
|--------------|----------|
| Length | 27.73 mm |
| Width | 67.75 mm |
| Total height | 15.39 mm |

1110596 LPC 2,5/13-ST-5,08

10 Series drawing

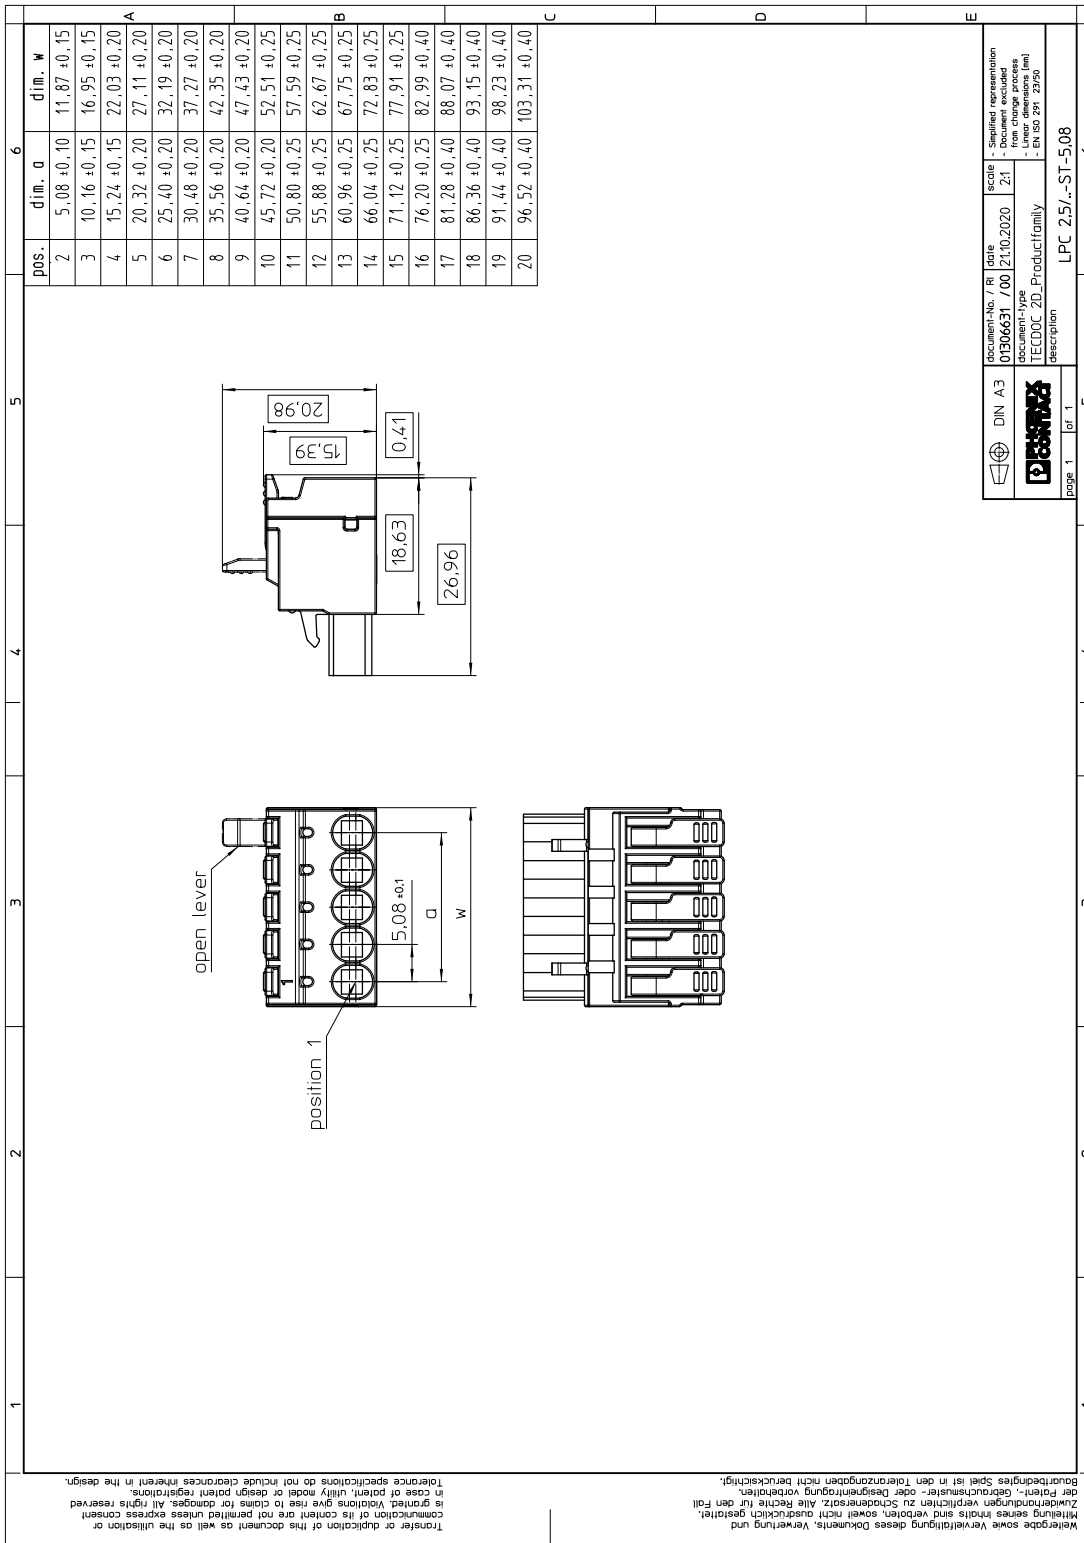

1110596 LPC 2,5/13-ST-5,08**11 Product notes****11.1 General information**

| | |
|--------------------|--|
| Notes on operation | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|--------------------|--|

12 Packaging information

| | |
|--------------------|---------------------|
| Type of packaging | packed in cardboard |
| Pieces per package | 50 |

13 Application**Ferrules without insulating collar, according to DIN 46228-1**

| | |
|--|--|
| Recommended crimping pliers | 1212034 CRIMPFOX 6 |
| Ferrules without insulating collar, according to DIN 46228-1 | Cross section: 0.25 mm ² ; Length: 7 mm Cross section: 0.34 mm ² ; Length: 7 mm Cross section: 0.5 mm ² ; Length: 8 mm ... 10 mm Cross section: 0.75 mm ² ; Length: 8 mm ... 10 mm Cross section: 1 mm ² ; Length: 8 mm ... 12 mm Cross section: 1.5 mm ² ; Length: 10 mm ... 12 mm Cross section: 2.5 mm ² ; Length: 10 mm ... 12 mm |

Ferrules with insulating collar, according to DIN 46228-4

| | |
|---|--|
| Recommended crimping pliers | 1212034 CRIMPFOX 6 |
| Ferrules with insulating collar, according to DIN 46228-4 | Cross section: 0.25 mm ² ; Length: 8 mm ... 10 mm Cross section: 0.34 mm ² ; Length: 8 mm ... 10 mm Cross section: 0.5 mm ² ; Length: 8 mm ... 10 mm Cross section: 0.75 mm ² ; Length: 10 mm ... 12 mm Cross section: 1 mm ² ; Length: 10 mm ... 12 mm Cross section: 1.5 mm ² ; Length: 10 mm ... 12 mm Cross section: 2.5 mm ² ; Length: 12 mm |

13.1 Temperature limit values

| | |
|---|---|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Ambient temperature (assembly) | -5 °C ... 100 °C |
| Ambient temperature (operation) | -40 °C ... 105 °C (dependent on the derating curve) |

1110596 LPC 2,5/13-ST-5,08**14 General tests****14.1 Specification**

| | |
|-------------------|---------------------------------|
| Specification | IEC 61984 |
| Specification | IEC 60999-1 |
| Brief description | Printed-circuit board connector |

15 Mechanical tests**15.1 Check for damage to conductor or loosening**

| | |
|---------------|---------------------|
| Result | Test passed |
| Specification | IEC 60999-1:1999-11 |

15.2 Pull-out test

| | |
|--|---|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |
| Conductor cross section/conductor type/tractive force actual value | 0.2 mm ² / solid / > 10 N |
| Conductor cross section/conductor type/tractive force actual value | 0.2 mm ² / flexible / > 10 N |
| Conductor cross section/conductor type/tractive force actual value | 2.5 mm ² / solid / > 50 N |
| Conductor cross section/conductor type/tractive force actual value | 2.5 mm ² / flexible / > 50 N |

15.3 Repeated connection and disconnection

| | |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |

15.4 Conductor connection

| | |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |

15.5 Visual examination

| | |
|--------------------|-----------------------|
| Specification | IEC 61984:2008-10 |
| Visual examination | Test passed |
| Specification | IEC 60512-1-1:2002-02 |

15.6 Dimensional test

| | |
|------------------|-----------------------|
| Dimensional test | Test passed |
| Specification | IEC 60512-1-2:2002-02 |

15.7 Resistance of marking

1110596 LPC 2,5/13-ST-5,08



| | |
|-----------------------|------------------------|
| Resistance of marking | Test passed |
| Specification | IEC 60068-2-70:1995-12 |

15.8 Polarization and coding



| | |
|---|------------------------|
| Polarization when inserted Requirement >20 N | Test passed |
| Specification | IEC 60512-13-5:2006-02 |

1110596 LPC 2,5/13-ST-5,08**16 Insertion and withdrawal forces**

| Insertion and withdrawal force | |
|-------------------------------------|-------------|
| Specification | Test passed |
| No. of cycles | 25 |
| Insertion strength per pos. approx. | 7 N |
| Withdraw strength per pos. approx. | 6 N |

1110596 LPC 2,5/13-ST-5,08**17 Electrical tests**

| | |
|---|----------------------------|
| Rated current / conductor cross section | 16 A / 2.5 mm ² |
| Rated insulation voltage (III/2) | 320 V |
| Rated surge voltage (III/2) | 4 kV |
| Contact resistance | 1 mΩ |
| Degree of pollution | 2 |

17.1 Air and creepage distances

| | | | |
|---|---------------------|-------|--------|
| Component | PCB connector | | |
| Specification | IEC 60664-1:2007-04 | | |
| Mains type | unearthed mains | | |
| Insulating material group | I | | |
| Comparative tracking index (IEC 60112:2003-01) | CTI 600 | | |
| Rated insulation voltage | 250 V | 320 V | 630 V |
| Rated surge voltage | 4 kV | 4 kV | 4 kV |
| Degree of pollution | 3 | 2 | 2 |
| Overvoltage category | III | III | II |
| Minimum clearance case A (inhomogeneous field) | 3 mm | 3 mm | 3 mm |
| Minimum value of the creepage path requirement in acc. with table | 3.2 mm | 3 mm | 3.2 mm |

17.2 Electrical function

| | |
|--------------------------------------|--|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |
| Voltage drop | Voltage drop (U) after the load ≤ 15 mV |
| Test current (minimum cross section) | 3 A AC |
| Test current (maximum cross section) | 16 A AC |
| Conductor cross section, flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section, rigid | 0.2 mm ² ... 2.5 mm ² |

17.3 Temperature cycles


| | |
|--------------------------------------|---|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |
| Voltage drop | Voltage drop (U) after the load ≤ 22.5 mV or $1.5 \times U_{after 24 h}$ The small value is to be used. |
| Test current (minimum cross section) | 3 A AC |
| Test current (maximum cross section) | 16 A AC |
| Temperature cycles | 192 |
| Conductor cross section, flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section, rigid | 0.2 mm ² ... 2.5 mm ² |

1110596 LPC 2,5/13-ST-5,08

18 Current carrying capacity/derating curves

| | |
|-------------------------|---|
| Specification | IEC 61984:2008-10 |
| Note | Representation based on IEC 60512-5-2:2002-02 |
| Note | For number of positions, see diagram |
| Reduction factor | 0.8 |
| Conductor cross section | 2.5 mm ² |

Type: LPC 2,5/...-ST-5,08 with CCA 2,5/...-G-5,08 P...THR

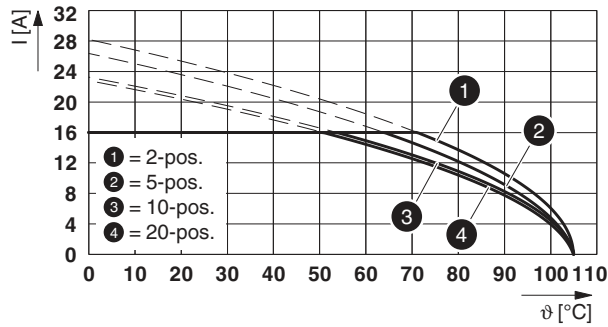

1110596 LPC 2,5/13-ST-5,08**19 Environmental and durability tests****19.1 Vibration test**

| | |
|------------------------|-------------------------------------|
| Specification | IEC 60068-2-6:2007-12 |
| Result | Test passed |
| Frequency | 10 - 150 - 10 Hz |
| Sweep speed | 1 octave/min |
| Amplitude | 0.35 mm (10 - 60.1 Hz) |
| Acceleration | 50 m/s ² (60.1 - 150 Hz) |
| Test duration per axis | 2.5 h |
| Test directions | X-, Y- and Z-axis |
| Note | |

19.2 Railway application, vibration test

| | |
|-----------------|---|
| Specification | IEC 61373:2010-05 |
| Result | Test passed |
| Testing | Vibration, broadband noise |
| Frequency | 5 - 150 Hz |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Spectrum | Service life test category 1, class B, body mounted |
| | |

20 Classification for connectors

| | |
|-----------------------------------|--|
| Specification | IEC 61984:2008-10 |
| Main features | Connectors without switching capacity (COC) |
| Construction form | Fixed connectors |
| Strain relief elements | without strain relief |
| Connection method | Can be reconnected |
| Protection against electric shock | Not encapsulated - touch-proof when inserted |
| Protective conductor | without PE |
| Lock | no |
| Connection method | Screwless terminal points |

1110596 LPC 2,5/13-ST-5,08**21 Commercial Data**

| | |
|--------------------|--|
| Order No. | 1110596 |
| Type | LPC 2,5/13-ST-5,08 |
| Pieces per package | 50 |
| Net weight | 2.22 g |
| GTIN | 4063151027384 |
| | Information that applies locally, see link on page 1 |
| | Information that applies locally, see link on page 1 |

22 Accessories

| Description | Order No. | Type |
|---|-----------|---------|
| Coding profile, is inserted into the slot on the plug or inverted header, red insulating material | 1734634 | CP-MSTB |

1110596 LPC 2,5/13-ST-5,08

23 Combination tests

**LPC 2,5/13-ST**

IEC 61984

CCA 2,5/13-G

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 7 N / 6 N

Polarization when inserted
Requirement >20 N

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Durability tests (B)Contact resistance R₁ 1st level

1 mΩ

Contact resistance R₁ 2nd level

Insertion/withdrawal cycles

25

Contact resistance R₂

1.2 mΩ

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

Thermal tests (C)

Tested number of positions

20

Tested conductor cross section

2.5 mm²

Test current

16 A

Upper limiting temperature
Requirements < 100°C

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

Test sequence 2: heat storage

105 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test finger