





One Pole

Two Pole AC Medium Delay Tripping Curve J4




Three Pole

Features:

- UL1077 Recognized
- · 300% factory tested for guaranteed quality and reliability
- · Both AC and DC ratings are available
- 1, 2 and 3-pole versions available
- · Short, Medium and Long Delay Trip Curves
- · Visual trip indicator, RED On
- · Screw clamp, shock-proof wire terminations
- Standard 35mm DIN rail mounting
- · RoHs compliant
- High Density 13mm


Specifications:

| Number of Poles | 1,2&3 |
|-----------------------|--|
| Rated Voltage | AC 240/480V, DC 80V |
| Min. Amp Rating | 0.5A |
| Max. Amp Rating | 150A |
| Interrupting Capacity | 10kA (DC), 3kA (AC) |
| Operating Temp. Range | -40 ⁰ C - 85 ⁰ C |
| Agency Approvals | UL1077, CE, CCC, TUV, ROHS |

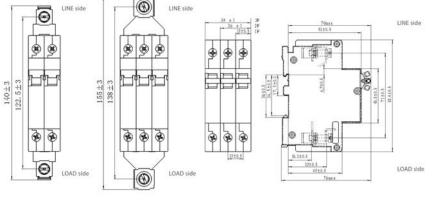

Miniature Circuit Breakers, Economy Series UL1077 Supplemental

| Rated Current (Amps) | One Pole | Two Pole | 3 Pole |
|----------------------------|---------------------------------------|--------------------|----------------|
| 0.5 | NDB5-J4.5-1P | | |
| 0.6 | NDB5-J4.6-1P | | |
| 0.7 | NDB5-J4.7-1P | | |
| 0.8 | NDB5-J4.8-1P | | |
| 0.9 | NDB5-J4.9-1P | | |
| 1 | NDB5-J41-1P | NDB5-J41-2P | NDB5-J41-3P |
| 2 | NDB5-J42-1P | NDB5-J42-2P | NDB5-J42-3P |
| 3 | NDB5-J43-1P | NDB5-J43-2P | NDB5-J43-3P |
| 4 | NDB5-J44-1P | NDB5-J44-2P | NDB5-J44-3P |
| 5 | NDB5-J45-1P | NDB5-J45-2P | NDB5-J45-3P |
| 6 | NDB5-J46-1P | NDB5-J46-2P | NDB5-J46-3P |
| 7 | NDB5-J47-1P | NDB5-J47-2P | NDB5-J47-3P |
| 8 | NDB5-J48-1P | NDB5-J48-2P | NDB5-J48-3P |
| 9 | NDB5-J49-1P | NDB5-J49-2P | NDB5-J49-3P |
| 10 | NDB5-J410-1P | NDB5-J410-2P | NDB5-J410-3P |
| 12 | NDB5-J412-1P | NDB5-J412-2P | NDB5-J412-3P |
| 15 | NDB5-J415-1P | NDB5-J415-2P | NDB5-J415-3P |
| 16 | NDB5-J416-1P | NDB5-J416-2P | NDB5-J416-3P |
| 20 | NDB5-J420-1P | NDB5-J420-2P | NDB5-J420-3P |
| 24 | NDB5-J424-1P | NDB5-J424-2P | NDB5-J424-3P |
| 25 | NDB5-J425-1P | NDB5-J425-2P | NDB5-J425-3P |
| 30 | NDB5-J430-1P | NDB5-J430-2P | NDB5-J430-3P |
| 32 | NDB5-J432-1P | NDB5-J432-2P | NDB5-J432-3P |
| 35 | NDB5-J435-1P | NDB5-J435-2P | NDB5-J435-3P |
| 40 | NDB5-J440-1P | NDB5-J440-2P | NDB5-J440-3P |
| 45 | NDB5-J445-1P | NDB5-J445-2P | NDB5-J445-3P |
| 50 | NDB5-J450-1P | NDB5-J450-2P | NDB5-J450-3P |
| 60 | NDB5-J460-1P | NDB5-J460-2P | NDB5-J460-3P |
| 63 | NDB5-J463-1P | NDB5-J463-2P | NDB5-J463-3P |
| 00 | | 3 Pole in Parallel | 11000-0400-01 |
| | 2 and | 1 | |
| 20 | | NDB5-J420-2PU | |
| 30 | n | NDB5-J430-2PU | |
| 40 | | NDB5-J440-2PU | - |
| 50 | A | NDB5-J450-2PU | |
| 60 | | NDB5-J460-2PU | |
| 63 | | NDB5-J463-2PU | |
| 70 | 7 | NDB5-J470-2PU | |
| 80 | - | NDB5-J480-2PU | 0 |
| 90 | | NDB5-J490-2PU | |
| 100 | | NDB5-J4100-2PU | |
| 105 | · · · · · · · · · · · · · · · · · · · | | NDB5-J4105-3PL |
| 110 | | | NDB5-J4110-3PL |
| 120 | | | NDB5-J4120-3PL |
| 125 | | | NDB5-J4125-3PL |
| 135 | | | NDB5-J4135-3PL |
| 150 | ¢ | | NDB5-J4150-3PU |



www.SourceASI.com

Automation Systems Interconnect = P.O. Box 1340, Mechanicsburg, PA 17055 = Phone: (717) 249-5581 or (877) 650-5160