


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC	1	
3	24-00003	Overmold, PVC, black	1	

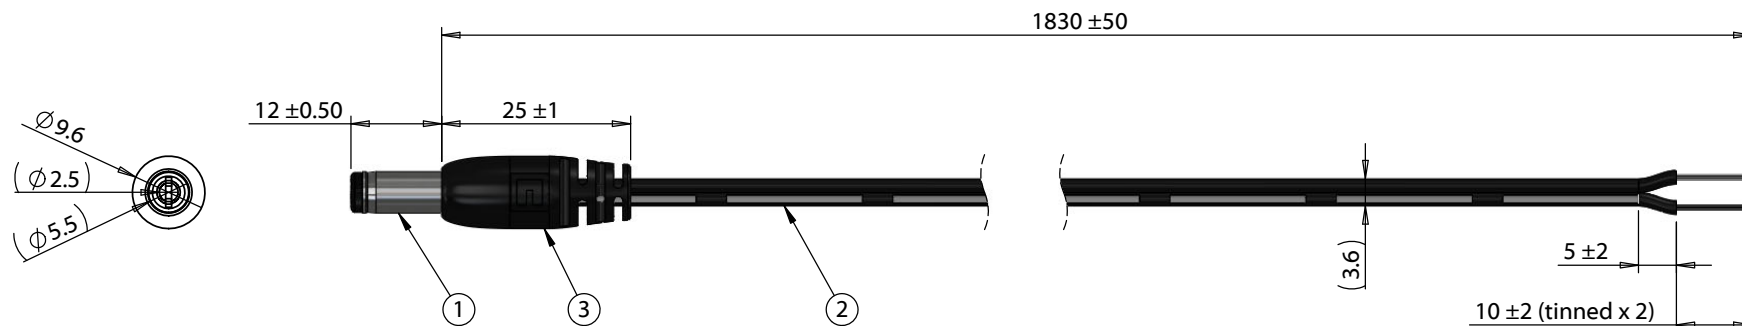

Notes:
Functionally equivalent components may be substituted
Cable rated for 48 V, 6 A

Wiring diagram	
50-00026	Wire Color
Center	Black with stripe
Sleeve	Black

Revision:	Date:	Description:	Prepared: JD <small>Digitally signed by JD Date: 2022.03.15 11:50:28 -07'00'</small>	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	6/28/2012	Initial release	Verified: AG <small>Digitally signed by AG Date: 2022.03.15 11:53:06 -07'00'</small>	RoHS compliant	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	Size: A
				Description: Cable, 1830 mm, 5.5x2.5x12 mm 50-00026 dc plug to stripped tinned, 24 AWG, 30-00003 wire	Part number: 10-01067
					Scale: 1:2
					Sheet 1 of 1