
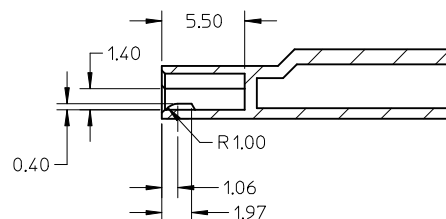
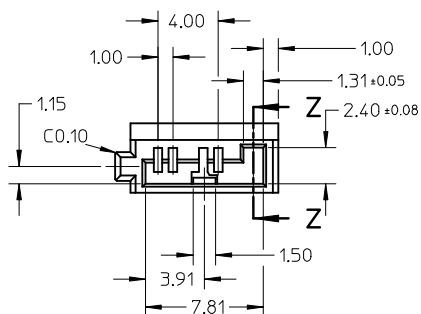
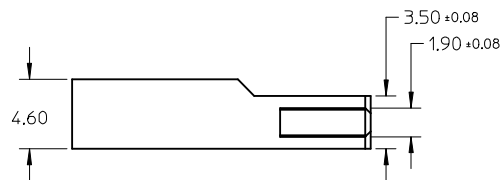
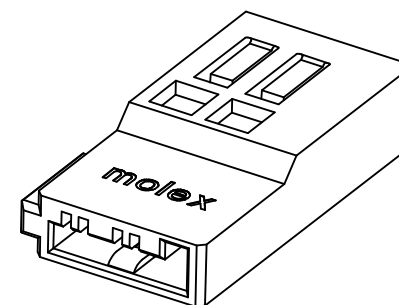


AFTER CABLE ASSEMBLY

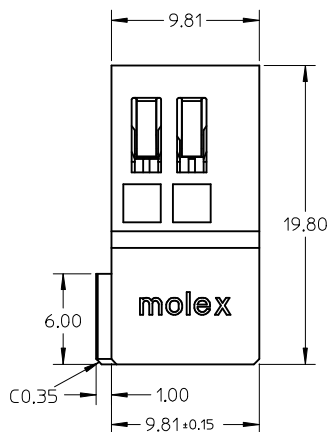

SECTION Z-Z

NOTES:

1. MATERIAL: THERMALPLASTIC, UL94V-0, COLOR: BLACK
2. TO BE USED WITH 47634-100*, 2 SETS TERMINAL PER HOUSING
3. PRODUCT SPECIFICATION REFER TO PS-47634-001
4. PACKAGE SPECIFICATION REFER TO PK-47634-002

NEW RELEASE
EC NO: SH2009-0049
DRW: XQZHANG
CHKD: XJISONG
APPR: HWANG
REV
A

QUALITY
SYMBOLS
=0
=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± 0.25	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
HZHAO	2007/10/10
CHECKED BY	DATE
JTIAN	2007/10/10
APPROVED BY	DATE
HWANG	2007/10/10

MATERIAL NO.
476342000

SCALE
4:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
HSG FOR SATA POWER
CABLE RECEPTACLE

MOLEX INCORPORATED

DOCUMENT NO.
SD-47634-002

SHEET NO.
1 OF 1