

### STELLA-G2-T3

IESNA Type III (medium) beam for roads that are equal to or wider than mounting height. Compatible with up to 30 mm LES size COBs. Variant with white frame.

### **SPECIFICATION:**

Dimensions	Ø 90.0 mm
Height	40.2 mm
Fastening	socket
Ingress protection classes	IP67
ROHS compliant	ves 🕕




### **MATERIALS:**

Component	Туре	Material	Colour	Finish
STELLA-G2-T3	Single lens	Silicone	clear	
STELLA-FRAME-WHT	Holder	PA66	white	

### **ORDERING INFORMATION:**

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FN16479_STELLA-G2-T3	Single lens	90	90	15	5.6
» Box size: 480 x 280 x 300 mm					

# PRODUCT DATASHEET FN16479\_STELLA-G2-T3

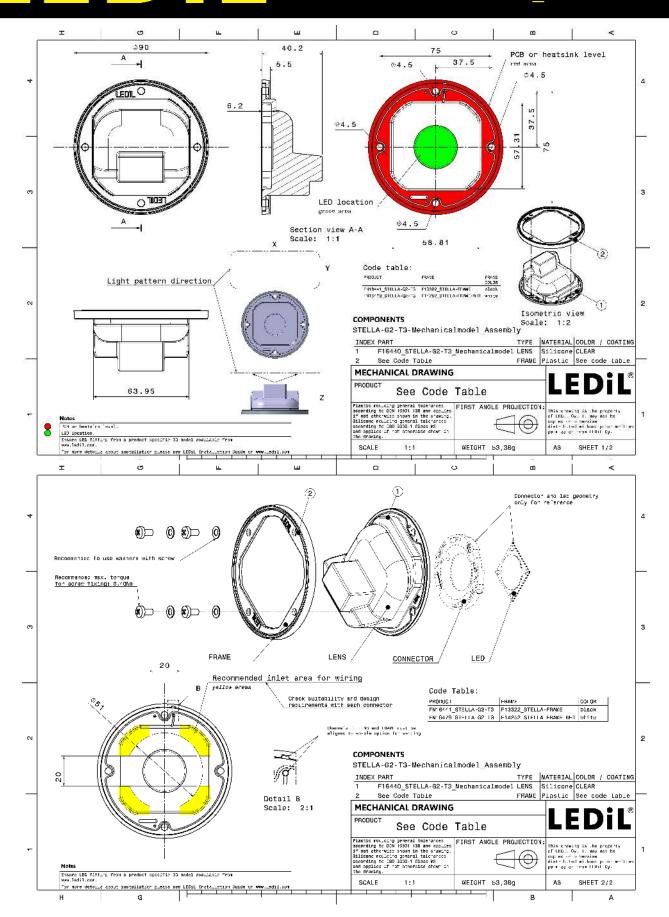

See also our general installation guide: www.ledil.com/installation\_guide



## **OPTICAL RESULTS (MEASURED):**



LED V22 Gen7


FWHM / FWTM Asymmetric Efficiency 91 %

Peak intensity 0.4 cd/lm

LEDs/each optic 1

Light colour White

Required components: BJB: 47.319.2030



### CREE & LED

LED CMA2550


FWHM / FWTM Asymmetric

Efficiency 91 %

Peak intensity 0.3 cd/lm

LEDs/each optic 1 Light colour White

Required components:



### CREE - LED

LED CMA3090


FWHM / FWTM Asymmetric

Efficiency 89 %

Peak intensity 0.4 cd/lm

LEDs/each optic 1 Light colour White

Required components:



### **DUMILEDS**

LED LUXEON CoB 1211

FWHM / FWTM Asymmetric


Efficiency 90 %
Peak intensity 0.4 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Bender Wirth: 431 Typ L3






## **OPTICAL RESULTS (SIMULATED):**

# **CITIZEN**

LED CLL04x/CLU04x FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White

Required components:



Published: 12/07/2019

# PRODUCT DATASHEET FN16479\_STELLA-G2-T3

### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

5/5

www.ledil.com/ where\_to\_buy