

wire connector CU 4 units accessory for: 3VA6 150/250



Model	
product brand name	SENTRON
product designation	accessories
Product version	circular conductor terminal
Accessories	Wire connector
General technical data	
designation / of the terminal	TC1.4
Connections according IEC	
stripped length	20 mm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	90 °C
stripped length	0.8 in
connectable conductor cross-section	
• for copper cable / stranded / minimum	6 AWG
• for copper cable / stranded / maximum	350 kcmil
• for copper cable / finely stranded / minimum	6 AWG
• for copper cable / finely stranded / maximum	350 kcmil
tightening torque / when using copper cables	
• stranded	6 - 2 AWG: 140 lb-in, 1 AWG - 350 kcmil: 275 lb-in
• finely stranded	6 - 2 AWG: 140 lb-in, 1 AWG - 350 kcmil: 275 lb-in
Further information	

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9244-0JD12>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9244-0JD12>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9244-0JD12](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9244-0JD12)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

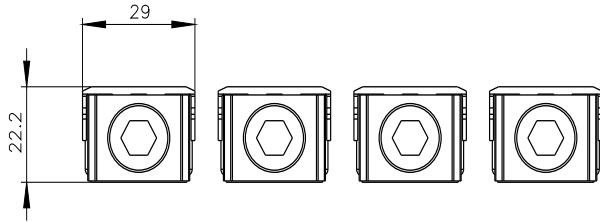

last modified:

9/23/2021 

