

FO connecting cable - VS-IL-2XGOF-50-2XSCRJ-20 - 1654455


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled fiber optic cable, round cable, fiberglass multi-mode 50/125 μm , SCRJ/IP67 on SCRJ/IP67, for installation inside buildings, length: 20 m



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 970734
Weight per Piece (excluding packing)	1117.3 GRM
Custom tariff number	85447000
Country of origin	Switzerland

Technical data

Mechanical characteristics

Number of positions	2
Connection profile	SCRJ according to DIN EN 50377-6-1
Fiber	50/125 μm
Number of fibers	2.00
Insertion/withdrawal cycles	≥ 1000
Type of cable	Round cable
Length of cable	20 m

Ambient conditions

Ambient temperature (operation)	-20 °C ... 70 °C
Degree of protection	IP67

Material data

Housing material	PA
------------------	----

FO connecting cable - VS-IL-2XGOF-50-2XSCRJ-20 - 1654455

Technical data

Material data

Cable seal material	NBR
Outer sheath, material	PUR
External sheath, color	orange
Ferrule holder color	White

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27061003
eCl@ss 7.0	27061003
eCl@ss 8.0	27061003

ETIM

ETIM 2.0	EC000764
ETIM 3.0	EC001263
ETIM 4.0	EC001263
ETIM 5.0	EC000830


UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Drawings


FO connecting cable - VS-IL-2XGOF-50-2XSCRJ-20 - 1654455

Dimensioned drawing

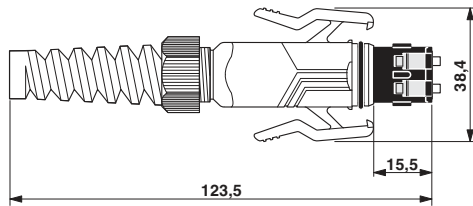

SCRJ connector, GOF, IP67

Dimensioned drawing

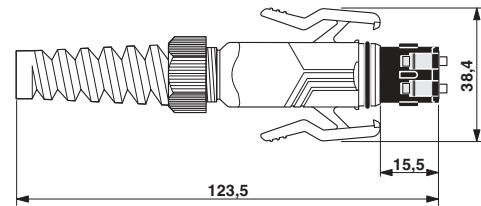

SCRJ connector, GOF, IP67