
T4161320005-005 - ACTIVE

TE Internal #: T4161320005-005 M12 Pigtail Cable Assembly, 5 Position, 5 m, Sensor/Actuator, Code A, M12 Socket, Shielded, Single Ended, GF Nylon View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies > M12 A-Code Pigtail, Female, Straight, Single End Cable

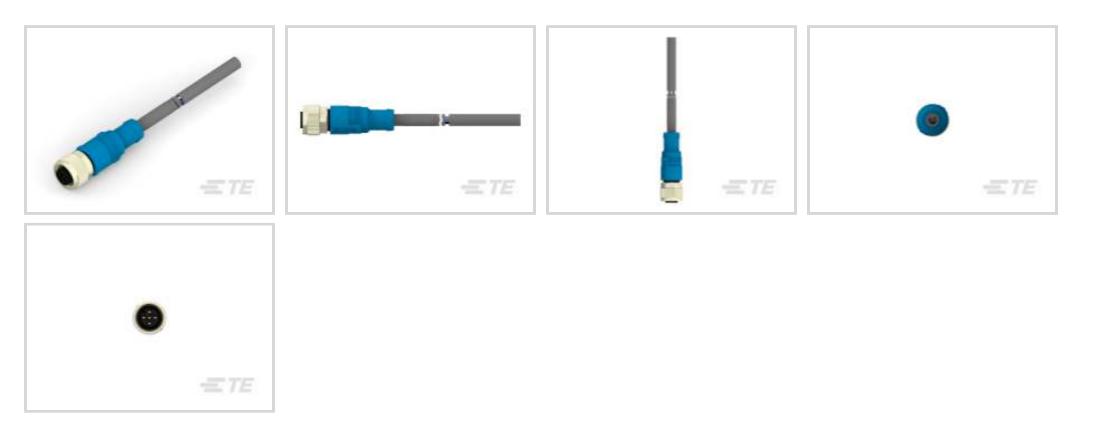

M8/M12 Application Type: Sensor/Actuator

Number of Positions: 5

Connector & Keying Code: A

Connector Type (End A): M12 Socket

Cable Assembly Type: M12 Pigtail

All M12 A-Code Pigtail, Female, Straight, Single End Cable (140)

Features

Product Type Features

Cable Assembly TypeM12 PigtailConfiguration Features5Number of Positions5Electrical Characteristics60 VACOperating Voltage60 VACBody Features5Cable ColorGrayConnector Color (End A)BlackJacket MaterialPURConductor MaterialCopper AlloyConnector & Keying CodeA	Connector Type (End A)	M12 Socket
Number of Positions5Electrical CharacteristicsOperating Voltage60 VACBody FeaturesGrayCable ColorGrayConnector Color (End A)BlackJacket MaterialPURConductor MaterialCopper AlloyConnector & Keying CodeA	Cable Assembly Type	M12 Pigtail
Electrical CharacteristicsOperating Voltage60 VACBody FeaturesCable ColorGrayConnector Color (End A)BlackJacket MaterialPURConductor MaterialCopper AlloyConnector & Keying CodeA	Configuration Features	
Operating Voltage60 VACBody Features700 PeaturesCable ColorGrayConnector Color (End A)BlackJacket MaterialPURConductor MaterialCopper AlloyConnector & Keying CodeA	Number of Positions	5
Body FeaturesCable ColorGrayConnector Color (End A)BlackJacket MaterialPURConductor MaterialCopper AlloyConnector & Keying CodeA	Electrical Characteristics	
Cable ColorGrayConnector Color (End A)BlackJacket MaterialPURConductor MaterialCopper AlloyConnector & Keying CodeA	Operating Voltage	60 VAC
Connector Color (End A)BlackJacket MaterialPURConductor MaterialCopper AlloyConnector & Keying CodeA	Body Features	
Jacket MaterialPURConductor MaterialCopper AlloyConnector & Keying CodeA	Cable Color	Gray
Conductor MaterialCopper AlloyConnector & Keying CodeA	Connector Color (End A)	Black
Connector & Keying Code A	Jacket Material	PUR
	Conductor Material	Copper Alloy
Contact Features	Connector & Keying Code	A
	Contact Features	

& For support call+1 800 522 6752

T4161320005-005

M12 Pigtail Cable Assembly, 5 Position, 5 m, Sensor/Actuator, Code A, M12 Socket, Shielded, Single Ended, GF Nylon



Contact Current Rating (Max)	4 A
Mechanical Attachment	
Thread Size	M12
Connector Orientation (End A)	Straight
Housing Features	
Housing Material	GF Nylon
Dimensions	
Wire Size	22 AWG
Operation/Application	
M8/M12 Application Type	Sensor/Actuator
Shielded	Yes
Packaging Features	
Packaging Method	Bag
Other	
Field Serviceable	Yes
Cable Assembly Length	5 m
Cable Assembly Configuration	Single Ended

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) SVHC > Threshold: Pb (1.9% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

T4161320005-005

M12 Pigtail Cable Assembly, 5 Position, 5 m, Sensor/Actuator, Code A, M12 Socket, Shielded, Single Ended, GF Nylon



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought







Documents

Product Drawings RPC-M12-FS-5CON-PUR-5.0SH

English

CAD Files

C For support call+1 800 522 6752

T4161320005-005

M12 Pigtail Cable Assembly, 5 Position, 5 m, Sensor/Actuator, Code A, M12 Socket, Shielded, Single Ended, GF Nylon



3D PDF

3D

Customer View Model ENG_CVM_CVM_T4161320005-005_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_T4161320005-005_A.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_T4161320005-005_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

M8 / M12 Connector System Catalog

Japanese

Product Specifications

Application Specification

English

Agency Approvals UL

English