




RAYCHEM

THERMOFIT MOLDED PARTS

SPECIFICATION CONTROL DRAWING

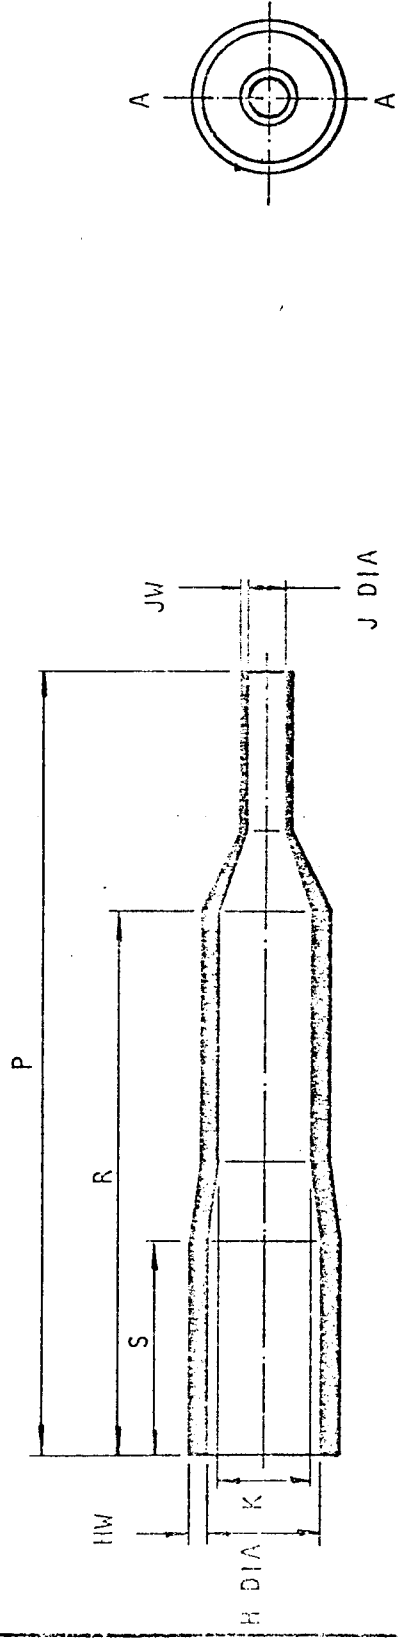

SECTION A-A

TABLE OF DIMENSIONS


a - As Supplied; b - After unrestricted recovery

PART NUMBER	H		J		K		P		R		S		HW		JW		
	Min a	Max b	Min a	Max b	Min c	Max b	Min a	Max b	Min a	Max b	Min a	Max b	Min a	Max b	Min a	Max b	
208W012-	25,4	14,0	10,2	5,1	25,4	11,4	-	102	-	71	-	28	-	2,5	-	1,0	mm
208W012-	1.00	0.55	0.40	.20	1.00	0.45	-	4.0	-	2.8	-	1.1	-	.10	-	.04	inches

REV	AUTH	DETAILS	Note: Drawing shows typical part after unrestricted recovery, unless otherwise specified. Metric Dimensions Imperial Dimensions			DRN	SJM	PART DESCRIPTION	PART No.	REV.
			CKD	BRHS	ISS					
B	BRHS	REDRAWN						BOOT, STRAIGHT, TWO STAGE	208W012-	B
										SEPTEMBER, 1973

© RAYCHEM LIMITED

(Ordering Information)

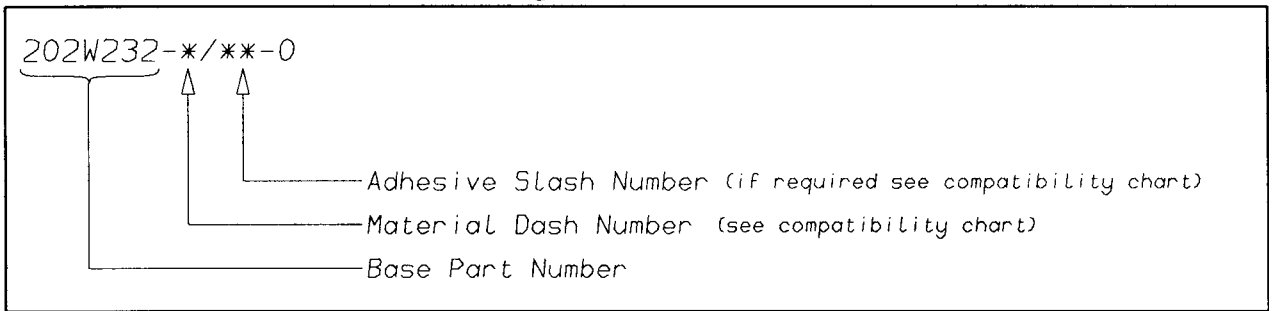

(COMPATIBILITY CHART)

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Raychem
Electronics OEM Division Europe
Swindon, Wiltshire, England.
Telephone: (01793) 528171 Fax: 573923