

MINI-MATCH

TE Internal #: 5164713-7 PCB Mount Header, Vertical, Board-to-Board, 7 Position, 2.5 mm [. 098 in] Centerline, Unshrouded, Tin, Through Hole - Solder, Power & Signal, Green

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical

Connector System: Board-to-Board

Number of Positions: 7

Centerline (Pitch): 2.5 mm [.098 in]

Features

Product Type Features

PCB Connector Assembly Type

Connector System

Header Type

PCB Mount Header

Board-to-Board

Unshrouded



Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Columns	7
PCB Mount Orientation	Vertical
Number of Positions	7
Body Features	
Primary Product Color	Green
Contact Features	
Contact Layout	Inline
Mating Tab Width	2.79 mm[.11 in]
Mating Tab Thickness	.5 mm[.02 in]
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	3.04 μm[120 μin]

PCB Mount Header, Vertical, Board-to-Board, 7 Position, 2.5 mm [.098 in] Centerline, Unshrouded, Tin, Through Hole - Solder, Power & Signal, Green



Contact Type	Tab
Contact Current Rating (Max)	7 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.5 mm[.02 in]
Rectangular Termination Post & Tail Width	.78 mm[.03 in]
Termination Post & Tail Length	3.2 mm[.125 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment	Without
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2.5 mm[.098 in]
Housing Material	PBT GF20
Dimensions	
Connector Length	17.5 mm[.689 in]
Connector Height	5.9 mm[.232 in]
Connector Width	6.3 mm[.248 in]
PCB Thickness (Recommended)	1.6 mm[.06 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Rating	Recognized
Agency/Standard	UL
Approved Standards	UL
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	2000
Packaging Type	Box

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 7 Position, 2.5 mm [.098 in] Centerline, Unshrouded, Tin, Through Hole - Solder, Power & Signal, Green



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Customers Also Bought

PCB Mount Header, Vertical, Board-to-Board, 7 Position, 2.5 mm [.098 in] Centerline, Unshrouded, Tin, Through Hole - Solder, Power & Signal, Green



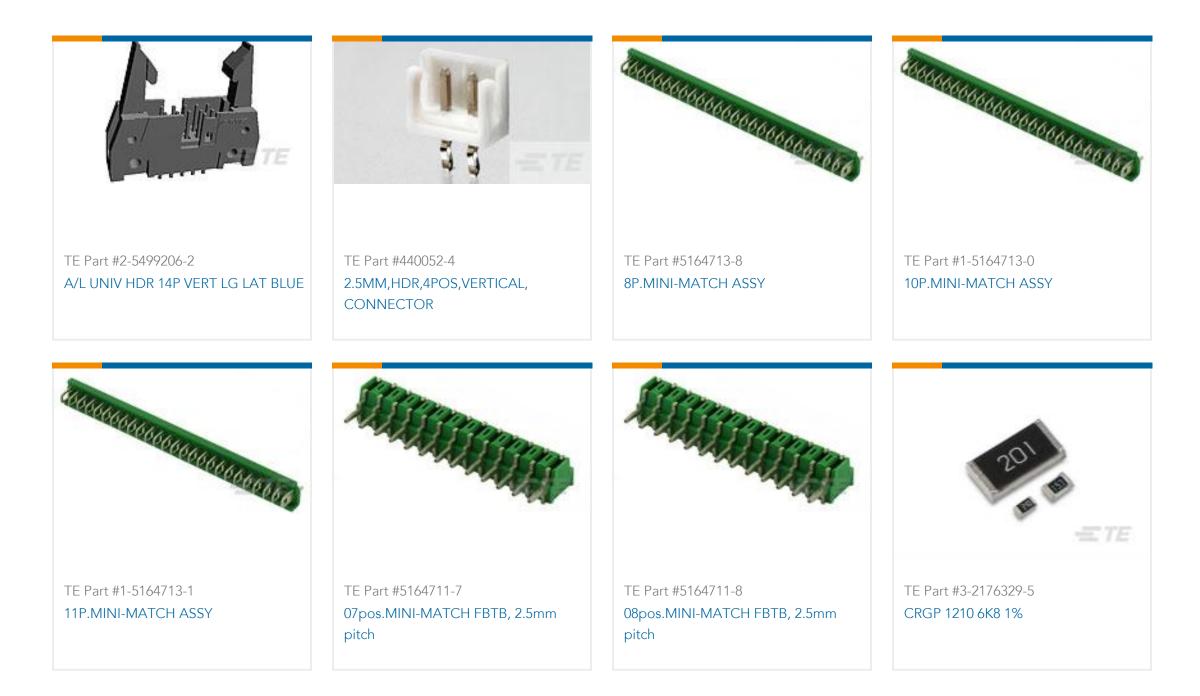

Documents

Product Drawings 07P.MINI-MATCH ASSY

English

CAD Files **Customer View Model** ENG_CVM_5164713-7_A.3d_igs.zip

English

Customer View Model

ENG_CVM_5164713-7_A.3d_stp.zip

English

Customer View Model

ENG_CVM_5164713-7_A.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Product Specifications Product Specification

Mini Match Connection System

English

Product Specification

English

Instruction Sheets Instruction Sheet (non U.S.)

& For support call+1 800 522 6752

PCB Mount Header, Vertical, Board-to-Board, 7 Position, 2.5 mm [.098 in] Centerline, Unshrouded, Tin, Through Hole - Solder, Power & Signal, Green



German