



DIMENSIONS

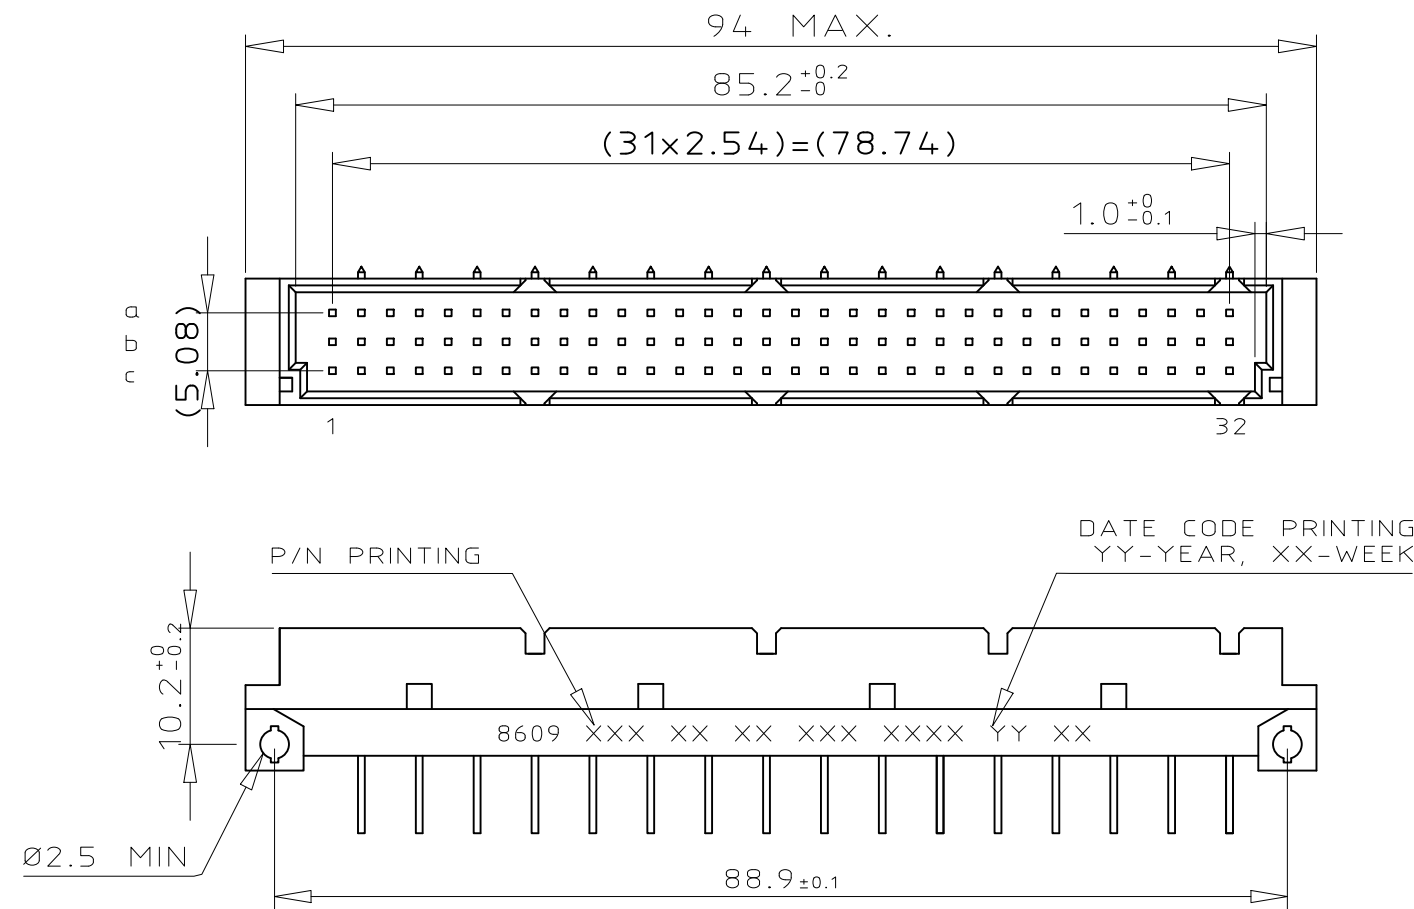


TERMINATION

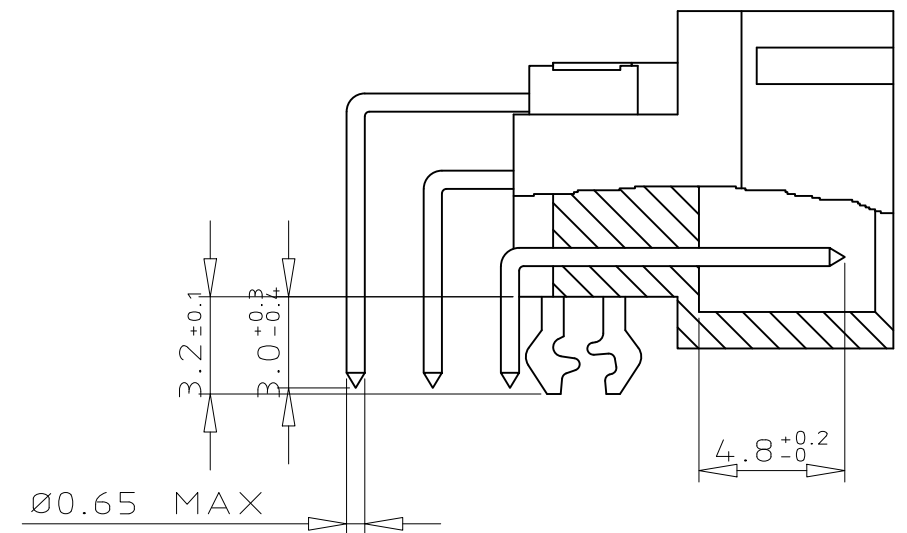

ORDERING INFORMATION

SERIES	8609	3	48	7	1	13	7	4	8	ELF
ROWS FITTED WITH CONTACTS										
ROW a b e				3	48					
ROW a e				4	32					
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR	7									
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C	1									
TERMINATION										
ANGLED SPILL	13									
OPTIONS										
NO OPTION	7									
WITH HARPOONS	H									
PERFORMANCE CLASS										
DIN 41612 CLASS 3	4									
DIN 41612 CLASS 2	5									
DIN 41612 CLASS 1	6									
AS PER MIL C 55302 / JSS 50808	8									
PITCH PER ROW										
5.08 mm EVEN LOADING	8									
LEAD FREE VERSION	ELF									

PCB LAYOUT

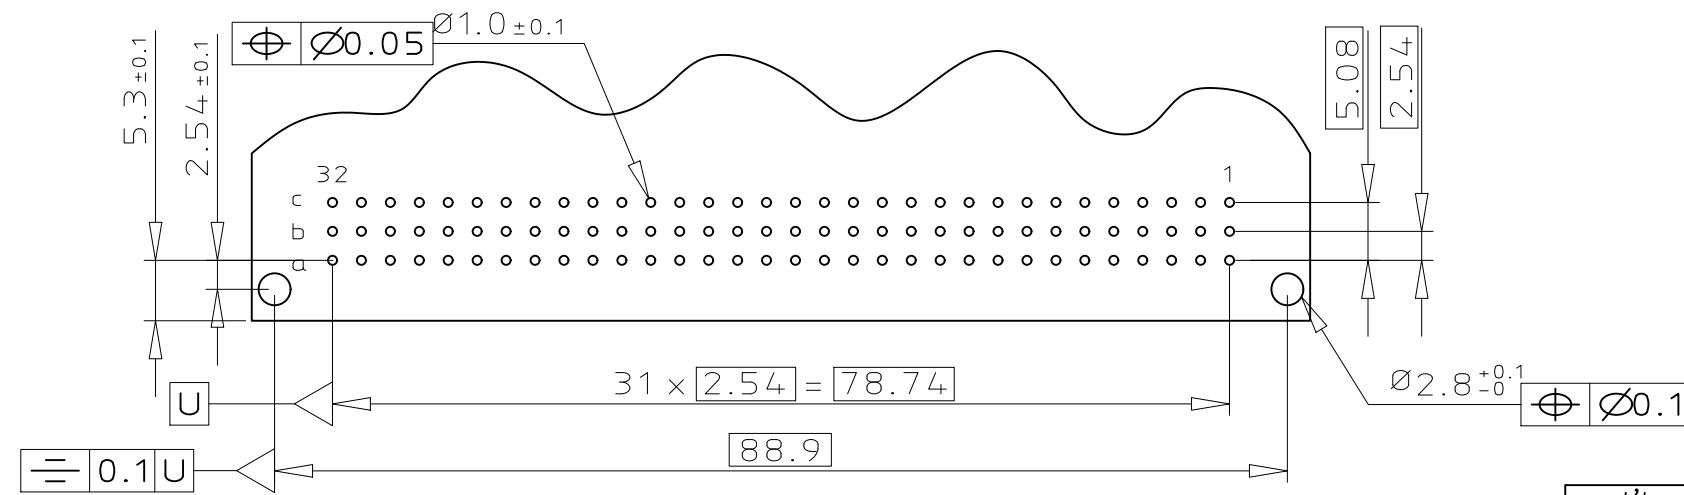

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	SEE DWG C-8609-0000A	surface	ISO 1302 ✓	tolerance	ISO 406 ISO 1101	projection		product family	8609
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	scale 3:2	title	
A	104-0084	MINI	2004-09-18	angles	linear			DIN STANDARD HEADER	
B	105-0089	MINI	2005-05-19	0°±2°		DIN 41612 STYLE C			
C	106-0061	MINI	2006-05-31					dwg no	sheet 1 of 1 size
D	107-0111	KR	2007-09-05	dr	MINI K V	2004-09-18		C-8609-2002 A3	
E	108-0146	KR	2008-10-22	enr	RAKHEE G	2004-09-18		type Product Customer Drawing	
F	ELX-I-41230	MJA	2021-06-16	chr	M JACOB	2021-06-16			
sheet index	revision sheet	F	1						

Amphenol FCI

Copyright AFCI