

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A,B	39014031	3CKT RECEPTACLE HOUSING 555703R2210	2	PC
C	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	6	PC
D	--	RESIN BLEND STPRNE	A/R	KG
E	--	MOLD PART INNER CAP	4	PC
F	--	RESIN PP RTP 151 A NAT UL94V-0 HF	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	B1	3CX16AWG UNSHD BK UL2464	BLACK
A2	B2		RED
A3	B3		WHITE

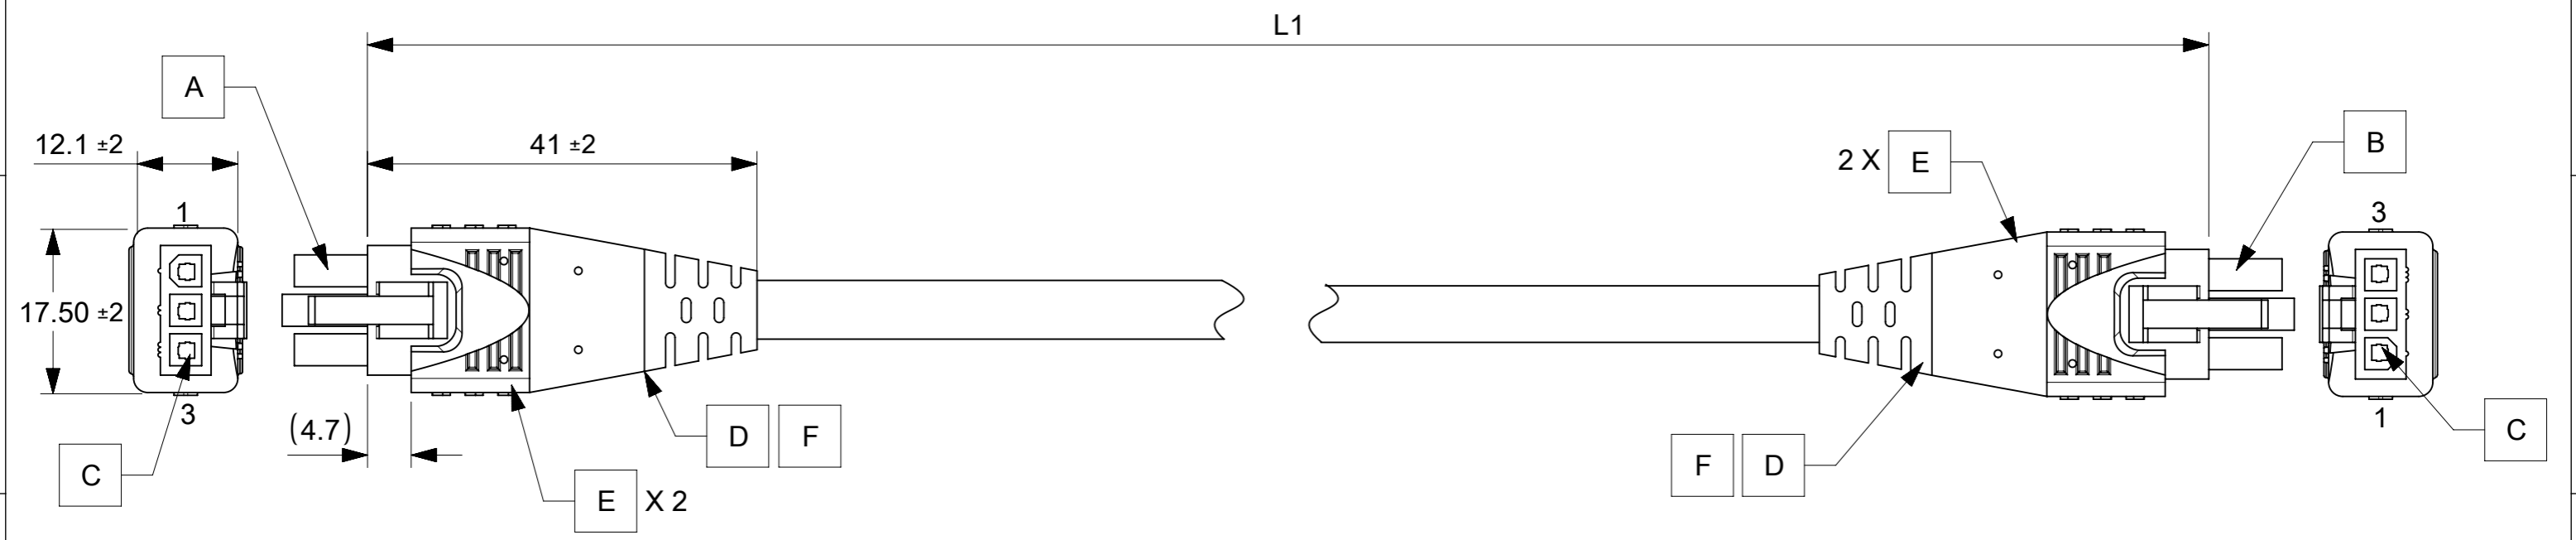


TABLE		
PART NUMBER	TITLE	L1
2153300305	3 CKT OVERMOLDED MINIFIT JR CABLE 500MM	500±10
2153300310	3 CKT OVERMOLDED MINIFIT JR CABLE 1M	1000±20
2153300320	3 CKT OVERMOLDED MINIFIT JR CABLE 2M	2000±25
2153300330	3 CKT OVERMOLDED MINIFIT JR CABLE 3M	3000±30

NOTES:

- MOLDING MATERIAL:
 - INNERCAP: PA66 NYLON RESIN.
 - OVERMOLD: SANTOPRENE TPE RESIN.
 - INNERMOLD: PP NAT UL94V-0
- ELECTRICAL PERFORMANCE:
 - VOLTAGE RATING: 300V AC.
 - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
 - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
 - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
 - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
 - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		molex																																	
	<table border="1"> <tr> <th>DIMENSION UNITS</th> <th>SCALE</th> </tr> <tr> <td>mm</td> <td>NTS</td> </tr> </table>	DIMENSION UNITS	SCALE		mm	NTS	<table border="1"> <tr> <th colspan="3">GENERAL TOLERANCES (UNLESS SPECIFIED)</th> </tr> <tr> <td>ANGULAR TOL</td> <td>±</td> <td>'</td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td></td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> </tr> </table>		GENERAL TOLERANCES (UNLESS SPECIFIED)			ANGULAR TOL	±	'	4 PLACES	±		3 PLACES	±		2 PLACES	±		1 PLACE	±		0 PLACES	±		<table border="1"> <tr> <td>EC NO: 740245</td> <td>2023/02/24</td> </tr> <tr> <td>DRWN: PRAVES6</td> <td>2023/03/29</td> </tr> <tr> <td>CHK'D: SKUMAR07</td> <td>2023/03/29</td> </tr> <tr> <td>APPR: SKUMAR07</td> <td>2023/03/29</td> </tr> </table>		EC NO: 740245	2023/02/24	DRWN: PRAVES6	2023/03/29	CHK'D: SKUMAR07	2023/03/29
DIMENSION UNITS	SCALE																																				
mm	NTS																																				
GENERAL TOLERANCES (UNLESS SPECIFIED)																																					
ANGULAR TOL	±	'																																			
4 PLACES	±																																				
3 PLACES	±																																				
2 PLACES	±																																				
1 PLACE	±																																				
0 PLACES	±																																				
EC NO: 740245	2023/02/24																																				
DRWN: PRAVES6	2023/03/29																																				
CHK'D: SKUMAR07	2023/03/29																																				
APPR: SKUMAR07	2023/03/29																																				
DIVISIONAL SYMBOLS	<table border="1"> <tr> <th colspan="2">INITIAL REVISION:</th> </tr> <tr> <td>DRWN: SBS04</td> <td>2021/05/01</td> </tr> <tr> <td>APPR: MNARAYAN01</td> <td>2021/05/10</td> </tr> </table>	INITIAL REVISION:		DRWN: SBS04	2021/05/01	APPR: MNARAYAN01	2021/05/10	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION																										
INITIAL REVISION:																																					
DRWN: SBS04	2021/05/01																																				
APPR: MNARAYAN01	2021/05/10																																				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		2153300305	PSD	000	C																																
THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER																															
		A3-SIZE	215330	SEE TABLE	GENERAL MARKET	1 OF 1																															