

Raychem Corporation
 300 Constitution Drive
 Menlo Park, CA 94025
 800-227-4856
 FAX 800-227-4866

R
PolySwitch®
PTC Devices
 Resettable Fuse

PRODUCT: RUSB135

DOCUMENT: SCD 23855
 PCN: 656839
 REV LETTER: D
 REV DATE: NOVEMBER 17, 1998
 PAGE NO.: 1 OF 1

Specification Status: Released



Electrical Rating


Voltage: 16VDC MAX
Current: 40A MAX

Leads:

24 AWG Tin/lead plated copper clad steel

PART MARKING:

 Raychem Logo
 R 135 — Part Identification
 Lot Identification (can be on back)

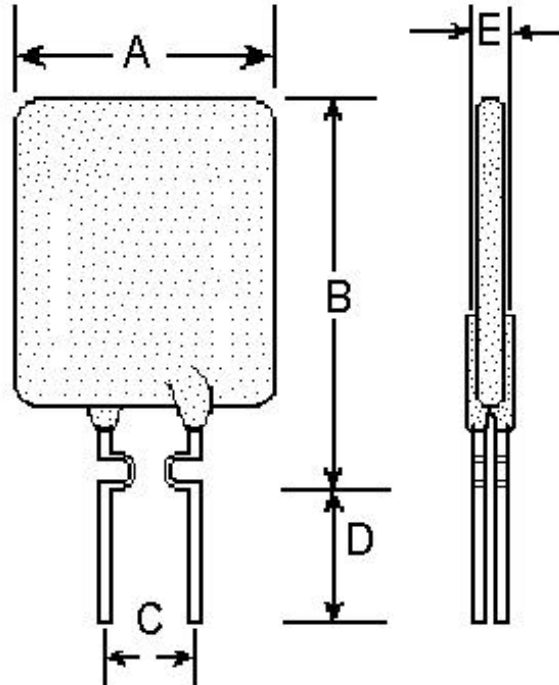

Lot identification may be on back of part

TABLE I. DIMENSIONS:

	A	B	C		D	E
	MAX	MAX	MIN	MAX	MIN	MAX
mm:	8.9	13.5	4.3	5.8	7.6	3.0
in*:	(0.35)	(0.53)	(0.17)	(0.23)	(0.30)	(0.12)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT RATINGS				TIME TO TRIP	RESISTANCE			TRIPPED-STATE POWER DISSIPATION
	AMPS AT 20°C HOLD	AMPS AT 0°C HOLD	AMPS AT 20°C HOLD TRIP	AMPS AT 60°C HOLD		OHMS AT 20°C			
					SECONDS AT 20°C, 8 A MAX	MIN	TYP	MAX*	WATTS AT 20°C TYP
1.35	1.55	1.35	2.70	0.81	4.5	0.04	0.06	0.115	0.8

*Maximum resistance is measured one hour after device is tripped and allowed to reset.

Recognitions: UL pending.
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.