
1-1744037-0 - ACTIVE

Economy Power

TE Internal #: 1-1744037-0 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 10 Position, 5.08 mm [.2 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

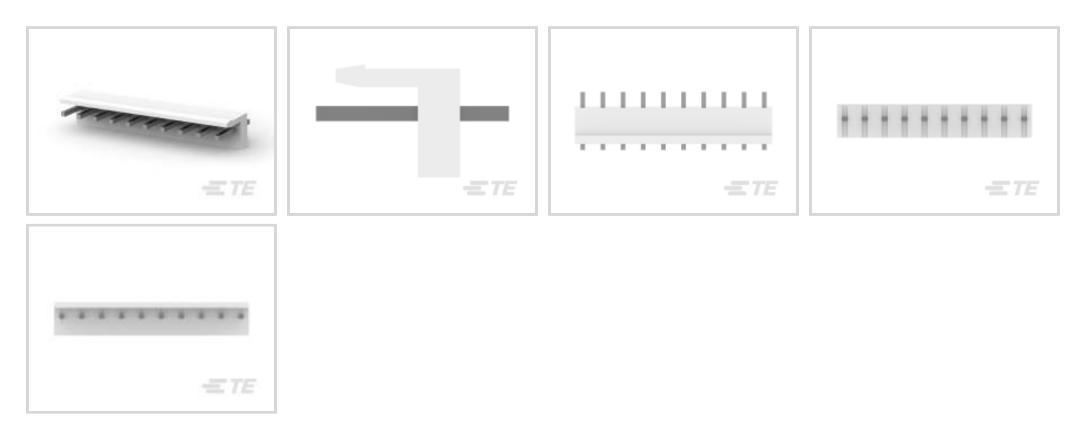

Rectangular Power Connector Type: Header

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 10

Centerline (Pitch): 5.08 mm [.2 in]

Features



Product Type Features

Header Type	Partially Shrouded			
Rectangular Power Connector Type	Header			
Connector & Housing Type	Plug			
Connector System	Wire-to-Board			
Sealable	No			
Connector & Contact Terminates To	Printed Circuit Board			
Configuration Features				
Number of Positions	10			
PCB Mount Orientation	Vertical			
Number of Power Positions	10			
Number of Rows	1			
Electrical Characteristics				
Operating Voltage	250 VDC			
Contact Features				

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 10 Position, 5.08 mm [.2 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



PCB Contact Termination Area Plating Material Thickness	.8 μm, 1 μm[31.49 μin][39.37 μin]
Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	8 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.03 μm[80 μin]
Termination Features	
Termination Post & Tail Length	1 mm[.146 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Strain Relief	Without
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	5.08 mm[.2 in]
Housing Color	Natural
Housing Material	Nylon 66
Dimensions	
Connector Height	10.9 mm[.429 in]
PCB Thickness (Recommended)	.06 mm[1.6 in]
Product Width	8.2 mm[.323 in]
Product Length	48.32 mm[1.902 in]
Jsage Conditions	
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 10 Position, 5.08 mm [.2 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Operation/Application

Circuit Application	Power
Industry Standards	
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Quantity	500
Packaging Method	Bag
Product Compliance For compliance documentation, visit the product page on TE.com>	
•	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Wave solder capable to 240°C

Does not contain REACH SVHC

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 10 Position, 5.08 mm [.2 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power






Also in the Series | Economy Power

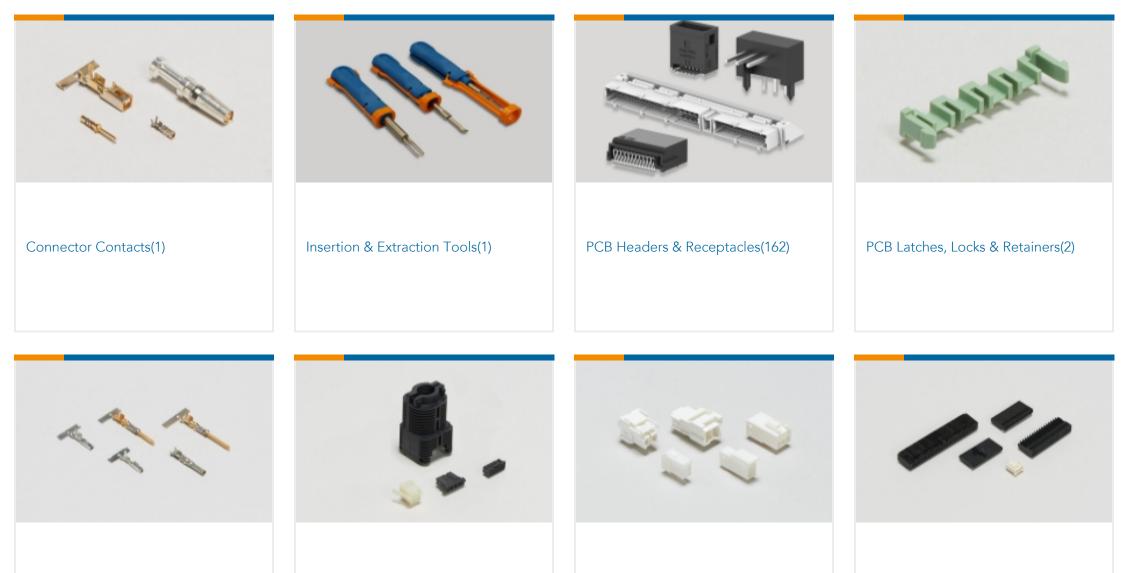

Power Contacts(8)	Rectangular Connector Housings(1)	Rectangular Power Connectors(302)	Wire-to-Board Connector Assemblies
			& Housings(142)

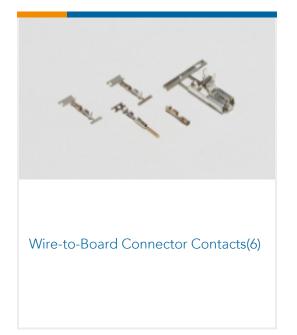

Customers Also Bought



Rectangular Power Connectors, Header, Plug, Wire-to-Board, 10 Position, 5.08 mm [.2 in] Centerline, Printed Circuit Board, UL 94V-0, Economy Power



Documents

Product Drawings 10P EC PWR.200 CL HDR ASSY VRT

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-1744037-0_O.2d_dxf.zip English Customer View Model

ENG_CVM_CVM_1-1744037-0_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1744037-0_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

1-1773885-9 Economy Power Connectors

English

Product Specifications

Application Specification

English

Application Specification

Japanese

Agency Approvals UL Report

English