

Customer Information Sheet

DRAWING No.: M80-715XXXX SHEET 2 OF 2 IF IN DOUBT - ASK © NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

SPECIFICATION:

MATERIALS:
 MOULDING = POLYAMIDE 46 UL94V-0
 CONTACTS = CLIP - BERYLLIUM COPPER, BODY - COPPER ALLOY
 JACKSCREWS & CIRCLIPS = STAINLESS STEEL

FINISH:
 01 = 3.5µ 90/10 TIN/LEAD BODY, 0.3µ GOLD CLIP
 05 = 0.25 - 0.3µ 100% GOLD

ELECTRICAL:
 CURRENT RATING AT 25°C -
 SMALL = 3.0A MAX
 LARGE = 15.0A MAX
 CURRENT RATING AT 85°C -
 SMALL = 2.2A MAX
 LARGE = 11.0A MAX

VOLTAGE PROOF = 360V AC/DC
 CONTACT RESISTANCE:
 INITIAL = 20mΩ MAX
 AFTER CONDITIONING = 25mΩ MAX
 INSULATION RESISTANCE:
 INITIAL = 1000MΩ MIN
 AFTER CONDITIONING = 100MΩ MIN

MECHANICAL:
 DURABILITY = 500 OPERATIONS
 INSERTION FORCE = 2.8N MAX, 1.0N MIN
 WITHDRAWAL FORCE = 1.8N MAX, 0.2N MIN

ENVIRONMENTAL:
 TEMPERATURE RANGE = -55°C TO +125°C

PACKING:
 TRAYS
 FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C017XX (LATEST ISSUE)

- NOTES:**
- FROM No. 1 POSITION, CONTACTS NUMBERED IN SEQUENCE FROM RIGHT TO LEFT AND FROM BOTTOM ROW TO TOP ROW (LOOKING ON MATING FACE).
 - CONTACTS SUPPLIED UN-ASSEMBLED.
 - RECOMMENDED WIRE TYPE = BS 3G 210 TYPE A, PTFE INSULATED, 24 - 28AWG. MAX INSULATION DIAMETER = Ø1.10mm. STRIP WIRE BY 2.00mm. RECOMMENDED WIRE SIZE FOR POWER CONTACTS = 18 & 20AWG.
 - RECOMMENDED HAND CRIMP TOOL = M22520/2-01 WITH POSITIONER T5747. REFER TO TOOLING INSTRUCTION SHEET IS-01 FOR COMPLETE CRIMPING INSTRUCTIONS.
 - CONTACT INSERTION AND EXTRACTION TOOL = Z80-280. REFER TO INSTRUCTION SHEET IS-25 FOR ASSEMBLY INSTRUCTIONS.


OBSOLETE

ORDER CODE: **M80-715XXXX**

No. OF SMALL CONTACTS: 06, 15, 24, 30, 42

FINISH:
 01 - GOLD CLIP, TIN SHELL
 05 - GOLD BODY, GOLD CLIP

POTTING WALLS
 BLANK - POTTING WALLS
 A - REMOVE POTTING WALLS

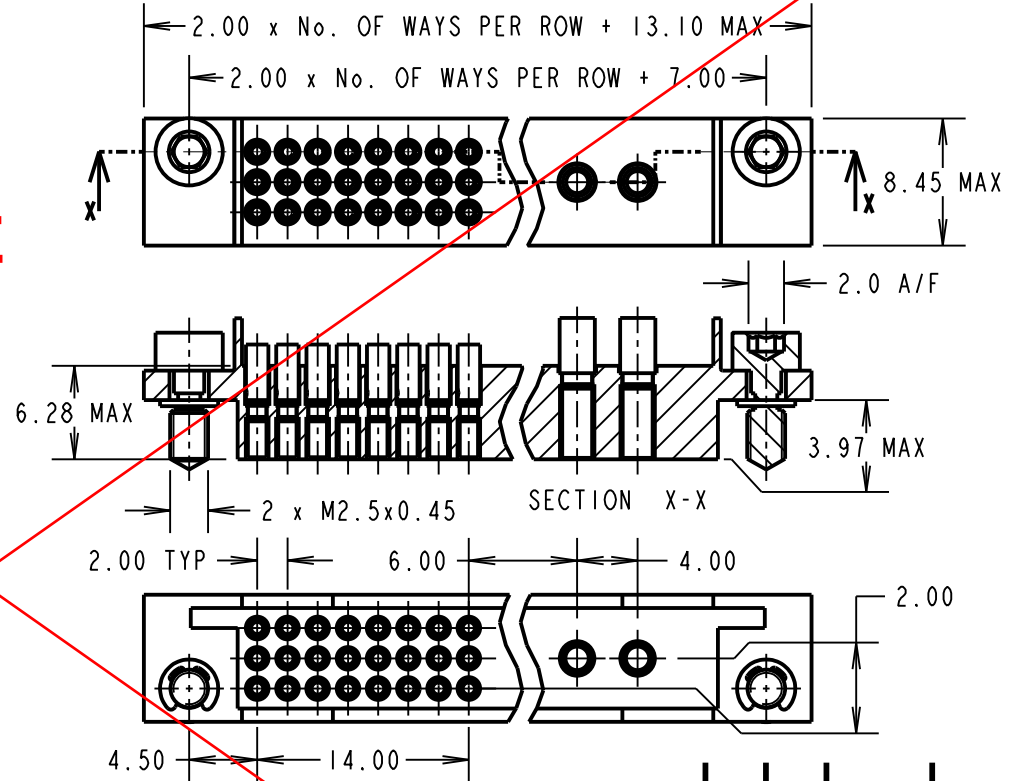

SM	7	04.08.11	11389
NAME	ISS.	DATE	C/NOTE
APPROVED: S. MCCULLAGH			
CHECKED: M. G. PLESTED			
DRAWN: W. J. BOURNE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
 TEL: 603 893 5376
 FAX: 603 893 5396
 mis@harwin.com

HARWIN Europe (UK)
 TEL: 023 9231 4545
 FAX: 023 9231 4590
 mis@harwin.co.uk

HARWIN Asia
 TEL: +65 6 779 4909
 FAX: +65 6 779 3868
 mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. = ±1mm
 X.X = ±0.25mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
 ANGLES = ±5°
 UNLESS STATED

MATERIAL:
 SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE: 3-ROW 2mm PITCH FEMALE CRIMP + POWER SOCKET ASSY (SMALL BORE) + JACKSCREWS

DRAWING NUMBER: M80-715XXXX

SHT 2 OF 2