

“Stay Connected” with



Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company




## Heyco® Rubber Grommets

For Panels from .063" (1,6 mm) to .125" (3,2 mm) Thick

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	MATERIAL	PART DIMENSIONS					
in.	mm.				A Inside Diameter	B Head Diameter		C Overall Height		in.
For .063" (1,6 mm) Thick Panels (continued)										
1.750	44,5	<b>G1369</b>	RG 1750-48-2	SBR	1.50	38,1	2.13	54,0	.44	11,1
2.375	60,3	<b>G1409</b>	RG 2.375-40-2	Nitrile	1.25	31,8	2.75	69,9		
2.500	63,5	<b>G1418</b> <b>G1422</b>	RG 2.5-40-2 RG 2.5-68-2	Nitrile SBR	1.25 2.13	31,8 54,0	2.88	73,0		
For .078" (2,0 mm) Thick Panels										
1.000	25,4	<b>G1253</b>	RG 1000-22-3	SBR	.69	17,5	1.31	33,4	.38	9,5
For .094" (2,4 mm) Thick Panels										
.281	7,1	<b>G1010</b>	RG 281-6-3	SBR	.19	4,8	.44	11,1	.22	5,6
.312	7,9	<b>G1014</b>	RG 312-6-3	SBR	.19	4,8	.50	12,7	.28	7,1
.375	9,5	<b>G1033</b>	RG 375-4-3	SBR	.13	3,2	.50	12,7	.31	8,0
		<b>G1038</b>	RG 375-8-3	SBR	.25	6,4	.50	12,7	.25	6,4
		<b>G1039</b>	RG 375-8-3A	SBR	.25	6,4	.56	14,3	.28	7,1
.437	11,1	<b>G1062</b>	RG 437-10-3	Nitrile	.31	8,0	.63	15,9	.31	8,0
.750	19,1	<b>G1178</b>	RG 750-16-3	SBR	.50	12,7	.88	22,2	.34	8,7
		<b>G1179</b>	RG 750-16-3A	SBR	.50	12,7	.97	24,6	.28	7,1
1.125	28,6	<b>G1281</b>	RG 1125-28-3	SBR	.88	22,2	1.50	38,1	.34	8,7
2.000	50,8	<b>G1387</b>	RG 2000-48-3	SBR	1.50	38,1	2.38	60,3	.38	9,5
For .110" (2,8 mm) Thick Panels										
.630	16,0	<b>G1140</b>	RG 630-16-3	SBR	.50	12,7	.81	20,6	.30	7,6
For .125" (3,2 mm) Thick Panels										
.312	7,9	<b>G1020</b>	RG 312-6-4	SBR	.19	4,8	.44	11,8	.25	6,4
.406	10,3	<b>G1047</b>	RG 406-9-4	SBR	.28	7,1	.63	15,9	.38	9,5
.437	11,1	<b>G1056</b>	RG 437-8-4	SBR	.25	6,4	.63	15,9	.25	6,4
.500	12,7	<b>G1091</b>	RG 500-9-4	SBR	.28	7,1	.75	18,9	.38	9,7
		<b>G1092</b>	RG 500-12-4	SBR	.38	9,5	.63	15,9	.31	8,0
		<b>G1093</b>	RG 500-12-4A	SBR	.38	9,5	.63	15,9	.41	10,3
.562	14,3	<b>G1114</b>	RG 562-10-4	SBR	.31	8,0	.81	20,7	.38	9,5
.625	15,9	<b>G1127</b>	RG 625-6-4	Nitrile	.19	4,8	.88	22,2	.25	6,4
		<b>G1132</b>	RG 625-12-4	SBR	.38	9,5	.88	22,2	.38	9,5
.687	17,5	<b>G1152</b>	RG 687-14-4	SBR	.44	11,1	.94	23,8	.38	9,5
.812	20,6	<b>G1188</b>	RG 812-12-4	SBR	.38	9,5	1.06	27,0		
		<b>G1193</b>	RG 812-16-4	SBR	.50	12,7	1.06	27,0		
		<b>G1198</b>	RG 812-18-4	SBR	.56	14,3	1.06	27,0		
.875	22,2	<b>G1218</b>	RG 875-20-4	SBR	.63	15,9	1.13	28,6	.31	8,0
1.000	25,4	<b>G1244</b>	RG 1000-12-4	SBR	.38	9,5	1.25	31,8		
		<b>G1247</b>	RG 1000-16-4	SBR	.50	12,7	1.25	31,8		
		<b>G1255</b>	RG 1000-22-4	SBR	.69	17,5	1.31	33,4		
1.250	31,8	<b>G1259</b>	RG 1000-24-4	EPDM	.75	19,1	1.19	30,2		
		<b>G1260</b>	RG 1000-24-4A	SBR	.75	19,1	1.25	31,8		
1.250	31,8	<b>G1291</b>	RG 1250-16-4	SBR	.50	12,7	1.50	38,1	.31	8,0
		<b>G1299</b>	RG 1250-24-4	SBR	.75	19,1	1.63	41,3		
		<b>G1304</b>	RG 1250-28-4	SBR	.88	22,2	1.63	41,3		

Standard color black.

- **Used to protect through holes.** Help eliminate sharp edges so your wires are protected and add aesthetic value to your application.
- 115 sizes available that will accommodate mounting holes ranging from .250" (6,4 mm) to holes as large as 2.375" (60,3 mm) diameter and panel thicknesses from .063" (1,6 mm) to .188" (4,8 mm).
- Rubber grommets are constructed of SBR (unless otherwise noted) with an operating temperature range of -40°F (-40°C) to 221°F (105°C).
- SBR grommets have good water resistant characteristics and are suitable for most moderate chemicals and wet or dry organic acids.
- Provide vibration dampening.

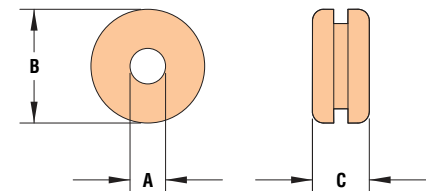

Material	SBR, Nitrile or EPDM
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs