
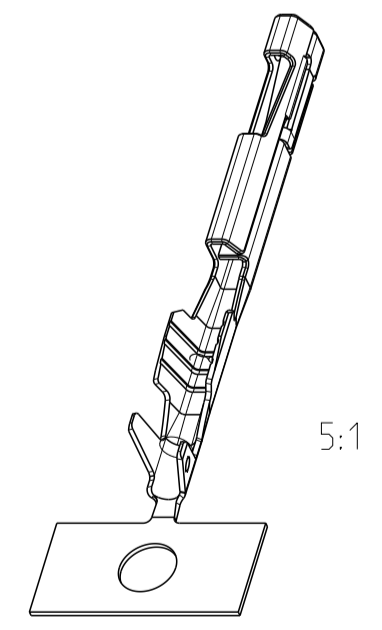
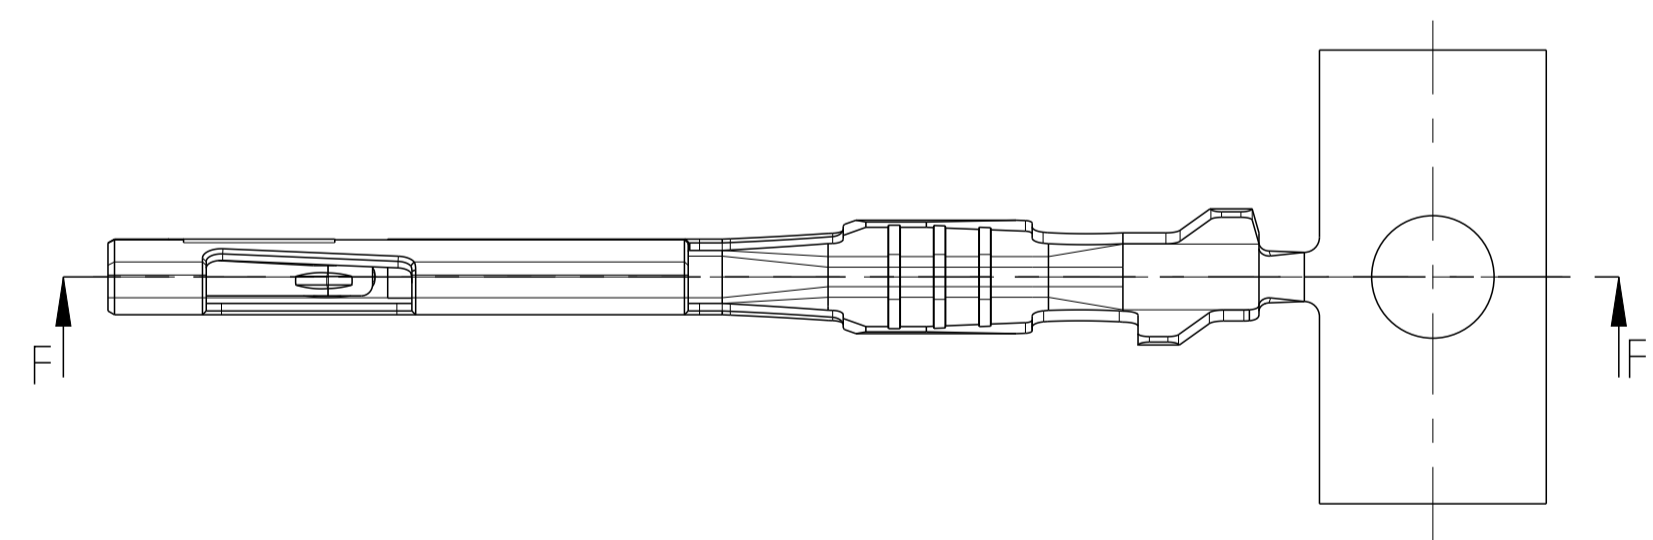
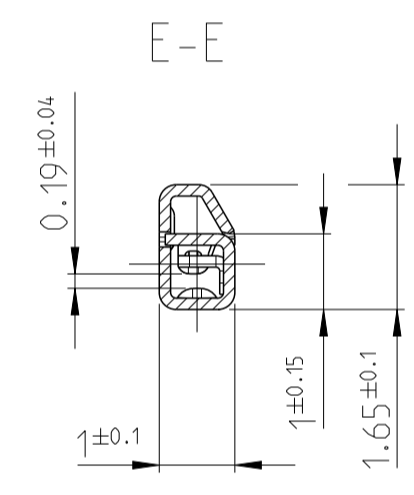
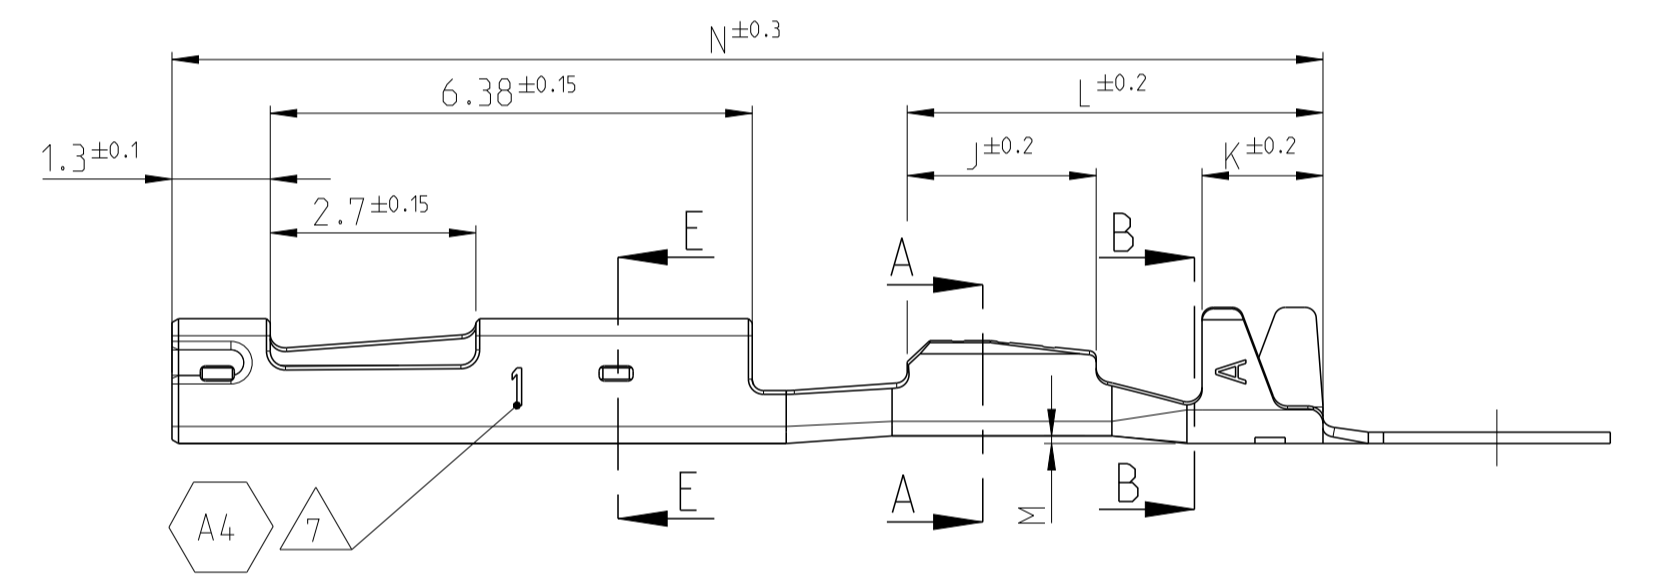
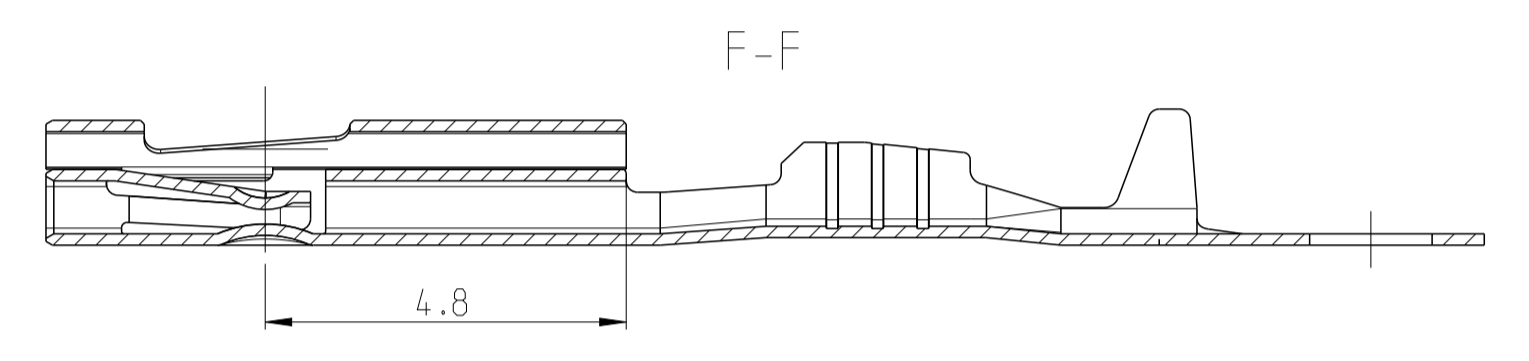


LOC	DIST	REVISONS	DATE	DWN	APVD
A1	-	DESCRIPTION			
		DESCRIPTION			
		DESCRIPTION			
		DESCRIPTION			

Bemerkungen
NOTES

- 1 Fuer FLR-Leitung nach DIN 72551, Teil 6
FOR FLR-WIRE SEE DIN 72551, PART 6
- 2 Oberflaeche
SURFACE
Kontaktfeder
-verzinkt 0.8...2.2µm Sn
min. 0.8µm Gold
MIN. 0.8µm GOLD
1.6-5µm Silber
1.6-5µm SILVER
- 3 Markierung fuer Oberflaeche
STAMPED INDICATOR FOR PLATING
- 4 TE Logo.
Aenderungsstand, Datumscode
REVISION STATUS, DATE CODE
- 5 Massgebend ist der deutsche Text
ONLY THE GERMAN LANGUAGE VERSION SHALL BE BINDING
- 6 Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- A4 Spurenuordnung in Zweispurwerkzeugen
TRACK ALLOCATION IN TWO TRACK DIES

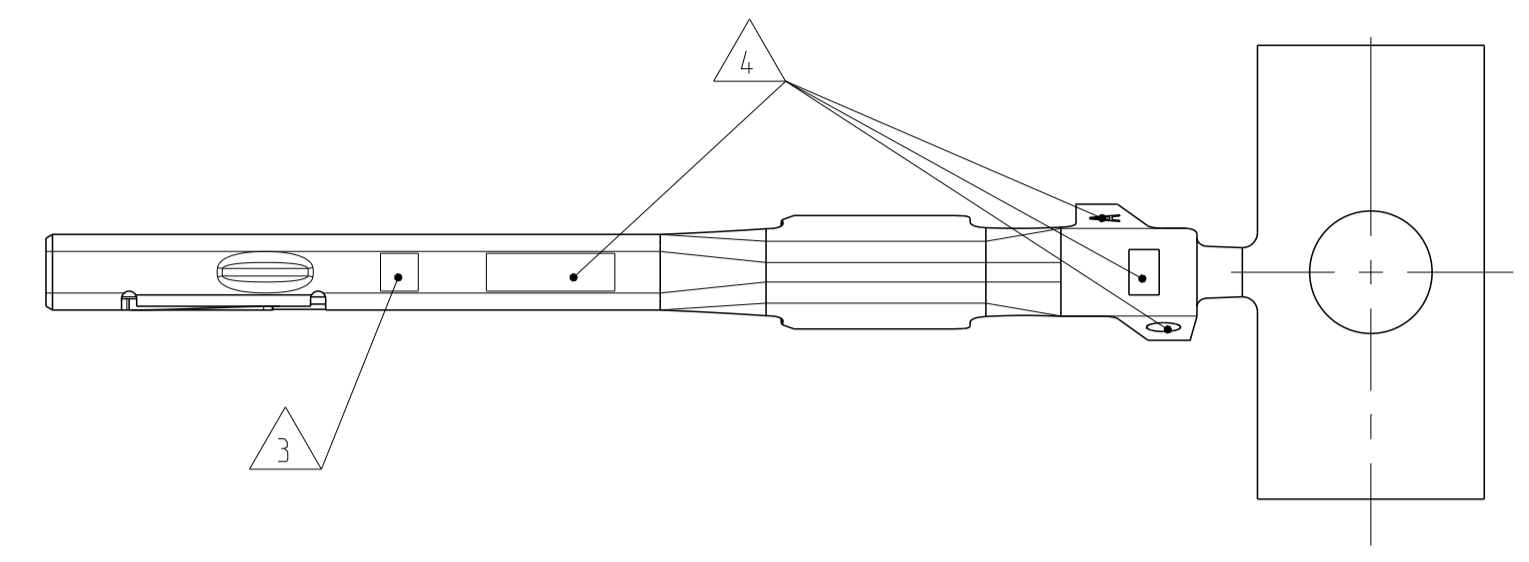

	WIRE - CRIMP		STANDARD INSULATION CRIMP														
	Draht - Crimp		Standart Isolations- Crimp														
	A-A		B-B														
	B±0.3	A±0.3	H±0.3	G±0.3													

	ORDER- NO. STRIP FORM Bestell- Nr. Bandware	Rev.	MATERIAL	SURFACE Oberflaeche	MARKING Markierung	WIRE-SIZE RANGE DGB	DIMENSIONS														
							A	B	C	E	F	G	H	D _{ISO}	J	K	L	M	N		
HIGH PERFORMANCE	1-2177909-1	A	CuNiSi	Sn	2St	0.22 - 0.35	1.7	(1.5)	1.05	0.3	0.3	1.8	(1.9)	0.9	2.5	1.6	5.5	0.1	15.25		
	1-2177909-2	A		Au	2G																
	0-2177909-3	A		Ag	2H																
STANDARD	0-2177909-1	A	CuSn8	Sn	2																
HIGH PERFORMANCE	1-2177908-1	A	CuNiSi	Sn	1St	0.13 - 0.17	1.5	(1.26)	0.9	0.3	0.3	1.8	(1.8)	0.9	2.5	1.6	5.5	0.1	15.25		
	1-2177908-2	A		Au	1G																
	0-2177908-3	A		Ag	1H																
STANDARD	0-2177908-1	A	CuSn8	Sn	1																

VERSION Ausfuehrung	ORDER- NO. STRIP FORM Bestell- Nr. Bandware	Rev.	MATERIAL	SURFACE Oberflaeche	MARKING Markierung	WIRE-SIZE RANGE DGB	DIMENSIONS												
							A	B	C	E	F	G	H	D _{ISO}	J	K	L	M	N
				2	3	1	STRIP FOR Bandware												
							DIMENSIONS Abmessungen [mm]												

volume Volumen	0.01	cm ³
density Dichte	8.9	g/cm ³
weight WITH CARRIER STRIP Gewicht mit Traegerstreifen	0.09	g

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).

TOLERANCING ISO 8015
TOLERIERUNG ISO 8015

DATE: 03SEP2012
DRAWN BY: S. G.
CHECKED BY: C. Schellhaas
APVD: W. Mueller

NAME: MCON 050, Buchsenkontakt, clean body
MCON 050, TERMINAL, CLEAN BODY

SIZE: A1
CAGE CODE: 00779
DRAWING NO.: 2208562
SHEET 1 OF 1

RESTRICTED TO NUR FÜR

CUSTOMER DRAWING