

1

2



3

4



5

6

7

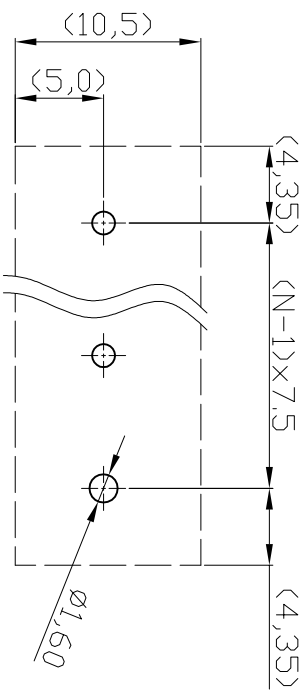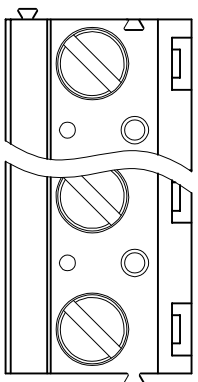

0,6  
N x 7,5  
0,6

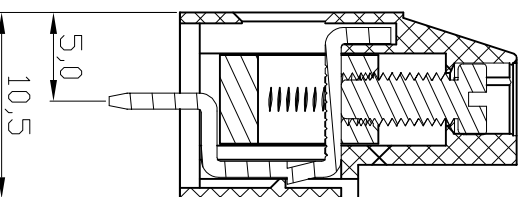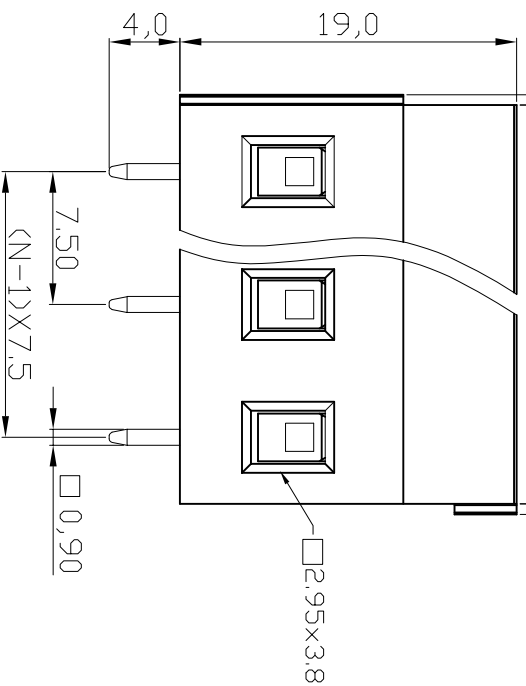

#### Material

1. Terminal body (metal housing): Brass(CuZn)
  2. Terminal screw: Steel Zinc plating"-\*slot type
  3. Contacts: Brass
  4. Surface of solder tail: Tin plated
  5. Insulator (housing): Thermoplastic (UL94V-0)
- Electrical
1. Voltage rating: 300VAC
  2. Current rating: 20A
  3. Solid wire(AWG): 12-30
  4. Stranded wire(AWG): 12-30
  5. Torque: 3.5 Lb-In
  6. Screw: M3
  7. Wire strip length: 6-7mm
  8. Withstanding Voltage: 1.6KV
  9. Operating temperature: -30°C to +105°C
  10. Soldering temperature: 250°C ± 10°C/5 Sec
  11. Safety Approval: us

N = NUMBER OF CONTACTS

**RoHS compliant**



File No.: E349947

Scale	1:1								
TOLERANCE									
X.	±0.50			Drawn	27.05.2009	Dean			
X.X	±0.30			Approved	19.04.2016	Winnie			
X.XX	±0.10								
DIM	TOL	②	Add the UL File No.		19.04.2016	Winnie			
X.°	±1°	①	Drawn		27.05.2009	Dean			
X.X°	±X°								
Angle	TOL	Id.	Modification						

Customer-No.

ASSMANN WSW-No.  
**A-TB750-VJXXH**

Drawing-No.

**ASS 3523 CO** rev02

Replace

Sheet

1

2

3

4

5

6

7

SV1501