

# ARCA 507030 No MP



Sample image

**Order symbol:** ARCA 507030 No MP

**Product nbr:** 8120031N

**Description:** Cabinet. PC


**Remarks:** Grey cover. 2-point locking. hinges on the short side

**EAN:** 6418074089458

**El. number:**

- Finland:
- Denmark:
- Sweden:

**Including:** Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

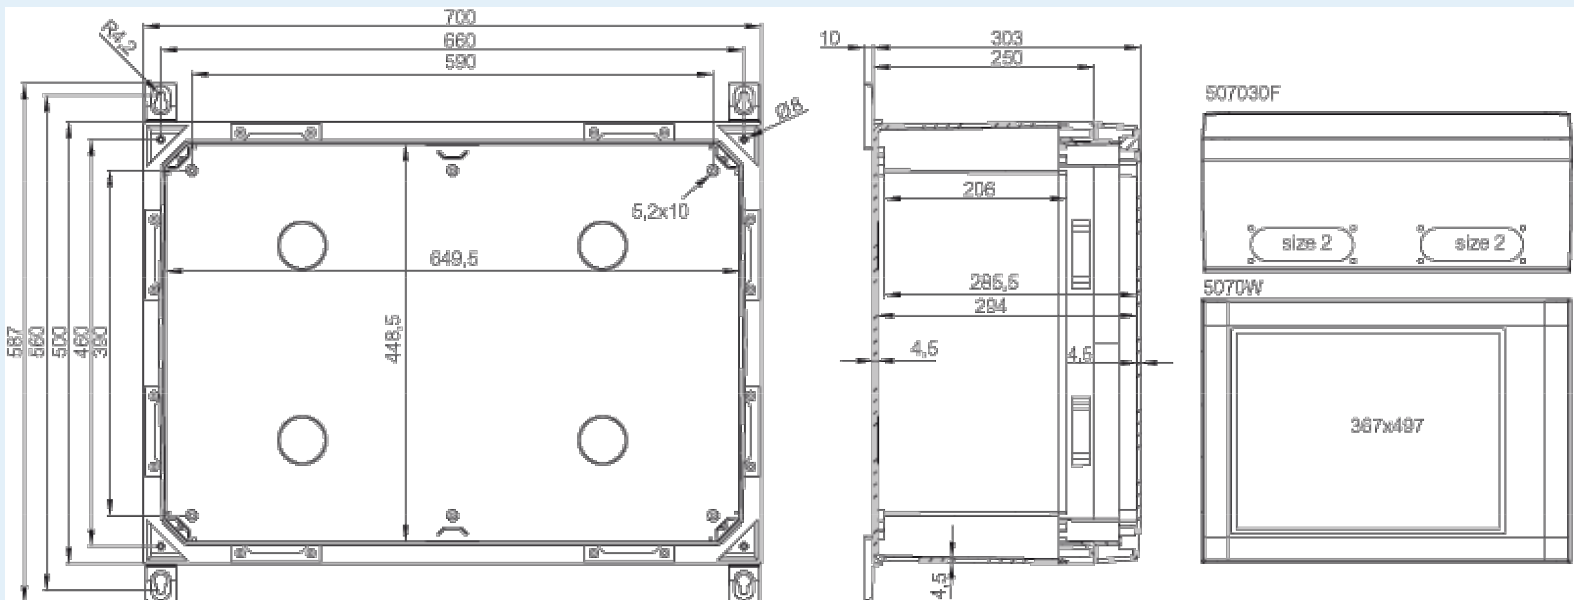

Dimensions:	Height	Width	Depth
mm:	500	700	300
inch:	19.69	27.56	12.2

**Materials:**

Material: Polycarbonate

**Accessories:**

- SBK ARCA 50 Support bar kit (435 x 40 x 30)
- MPX ARCA 7050 Mounting plate (630x430 mm) (630 x 430 x 5)
- PMK ARCA 70 PoleMounting kit. for pole  $\varnothing$ 100-300mm (685 x 485 x 35)
- RCS ARCA 5070 Rain canopy set for size 5070 (20 x 700 x 30)

Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

#### Temperatures:

Temperature °C (short term)::	-40 ... 120
Temperature °C (continuous):	-40 ... 80
Temperature °F (short term):	-40 ... 250
Temperature °F (continuous):	-40 ... 175

DSP ARCA RM	Door stopper ARCA. right. midsize 5070-8060
DRS ARCA 507030	DIN rail frame set (685 x 485 x 35)
IDS ARCA 5070	Inner door set (485 x 385 x 35)
SBK ARCA 70	Support bar kit (615 x 50 x 30)
DSP ARCA LM	Door stopper ARCA. left. midsize 5070-8060
MPS ARCA 7050	Mounting plate (630x430x2 mm) (630 x 430 x 2)
MPMP ARCA 7050	Mounting plate multiperforated (630x430x2 mm - ø3.6 mm) (630 x 430 x 2)
MPP ARCA 5070	Mounting plate perforated (630x430x2 mm - 26x11 mm) (430 x 630 x 2)

#### Rating:

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	NEMA 1, 4, 4X, 12 and 13

#### Certificates:

Certificate FI 40467