



Quick Connect Terminal Blocks

NTQ23

SPECIFICATIONS:


Rating: 40A, 600V
Center Spacing: .390" (9.91 mm)
Number Of Poles: 3
Circuits Per Foot: 28
Wire Range: AWG #8-22 CU
Screw Size: #8-32
Mounting Options: C-rail
Marking Tape: MT12-1/2
Torque Rating: 18 in-lb
Operating Temperature: 105°C



BNQ21



SPECIFICATIONS:

Rating: 40A, 600V; UL/CSA
Center Spacing: .437" (11.10 mm)
Number Of Poles: 1
Circuits Per Foot: 24
Wire Range: AWG #8-22 CU
Screw Size: #8-32
Quick Connects: .250" x .031"
Mounting Options: Base Mount
 Stackable; End Piece (Part No. BQE) is required for mounting. Mounting screws recommended every 8 circuits.
Torque Rating: 18 in-lb
Operating Temperature: 105°C



BQE

End Mounting Adapter Required

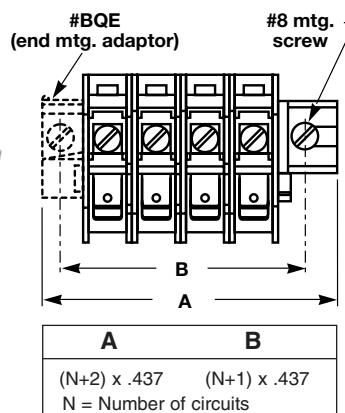

BQQ41

SPECIFICATIONS:

Rating: 30A, 600V; UL/CSA
Center Spacing: .437" (11.10 mm)
Number Of Poles: 1
Circuits Per Foot: 24
Wire Range: For use with quick connect terminals only.
Quick Connects: .250" x .031"
Mounting Options: Base Mount,
 Stackable; End Piece (Part No. BQE) is required for mounting. Mounting screws recommended every 8 circuits.
Operating Temperature: 105°C



BQE

End Mounting Adapter Required

