

Ø30mm Planetary Gear Motor Carbon - Brushed

MOT-IG30GM-1:71

Our Planetary Gear Motors are an inline solution providing excellent torque output at various speeds. They are equiped to handle varying loads and are best for intermittent duty operation. With endless performance combinations, we have a fully tailored gear motor solution for you.




Contact Us for alternative solutions!

Specifications	
Gearhead Type:	Planetary
Motor Type:	Carbon - Brushed
Rated Voltage:	24V DC
Rated Speed:	76 rpm
Rated Torque:	9.5 kg.cm
Rated Current:	0.91 A

No-Load Speed:	101 rpm (+/- 10%)
No-Load Current:	< 325 mA
Stall Torque:	38 kg.cm
Max. Power:	10 W
Reduction Ratio:	71:1
Termination Style:	Terminals

Dimensions CCW +0 -0.03 5-0.1 2 ± 0.2 MAX. ø18-0.2 LC. $\dot{\vec{\varphi}}$ ø30. ø30 4-M3x4dp 18.3±0.5 36.4±0.5 46.6±0.3 PCDø24 units: mm

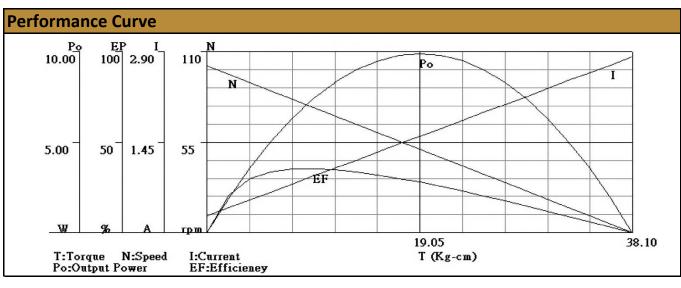



© 2022 ISL Products International Ltd. Specifications subject to change without notice.

ISL Products International Ltd. • 572 Walt Whitman Rd., Suite 100 • Melville, NY 11747 • T 516-937-3475 • www.islproducts.com