


In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

△	1	RE-F-06478	J.M	M. K	99.7.29	△									
APPLICATION STANDARD		OPERATING TEMPERATURE RANGE		-55 °C TO 85 °C		STORAGE TEMPERATURE RANGE		-10 °C TO 60 °C		RATING VOLTAGE		AC 50 V		RELATIVE HUMIDITY : 95 % MAX (NO DEW CONDENSATION IS PERMITTED)	
RATING CURRENT		0.3 A				OPERATING HUMIDITY RANGE									

SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENT	QT	AT
CONSTRUCTION				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING		○ ○ ○
MARKING	CONFIRMED VISUALLY.			○ ○ ○
ELECTRICAL CHARACTERISTICS				
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz).	70 mΩ MAX.		○ ○
INSULATION RESISTANCE	100 V DC.	100 MΩ MIN.		○ -
VOLTAGE PROOF	150 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.		○ ○
MECHANICAL CHARACTERISTICS				
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 48 N MAX WITHDRAWAL FORCE: 2 N MIN.		○ -
MECHANICAL OPERATION	50 TIMES INSERTION AND EXTRactions.	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.		○ -
VIBRATION	FREQUENCY: 10 TO 55 Hz SINGLE AMPLITUDE: 0.75 mm, m/s ² AT 10 CYCLES FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.		○ -
SHOCK	490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.	2) NO DAMAGE, CRACK AND LOOSENESS OF PART.		○ -

ENVIRONMENTAL CHARACTERISTICS				
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90~95 %, 96 h.	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PART.		○ -
RAPID CHANGE OF TEMPERATURE	TEMPERATURE: -55→15→35→85→15→35°C TIME: 30→2→3→30→2→3 min. UNDER 5 CYCLES.			○ -
DRY HEAT	EXPOSED AT 85 °C, 96 h. EXPOSED AT -55 °C, 96 h.	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.		○ -
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	NO HEAVY CORROSION.		○ -
SULPHUR DIOXIDE	EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JIS C 0090)	1) CONTACT RESISTANCE: 80 mΩ MAX. 2) NO HEAVY CORROSION.		○ -
RESISTANCE TO SOLDERING HEAT	REFLOW: RECOMMENDED TEMPERATURE PROFILE	NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT		○ -

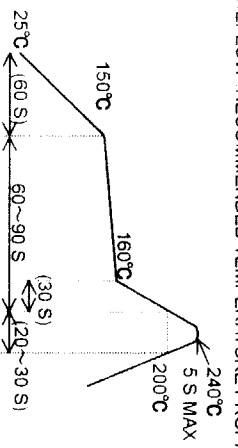

SOLDERABILITY	TO BE TESTED UNDER THE ABOVE CONDITIONS. SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s.	NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.	○	-
---------------	-----------------------------------------------------------------------------------------------------------------	----------------------------------------------	---	---

REMARKS				
UNLESS OTHERWISE SPECIFIED, REFER TO JIS C 5402.				
NOTE	QT: QUALIFICATION TEST	AT: ASSURANCE TEST	○: APPLICABLE TEST	
	DRAWN	DESIGNED	CHECKED	APPROVED
	J. Matsukawa 99.06.07	J. Matsukawa 99.06.07	M. Ishida 99.06.07	Y. Yoshimura 99.06.08

HRS HIROSE ELECTRIC CO., LTD.		SPECIFICATION SHEET		PART NO.	
CODE NO. (OLD)	DRAWING NO.	CODE NO.	CL 573 - 0548 - 0 -	FX11A - 80P - SV	
CL	ELC4 - 152439 -			1	1

TO
PCK

