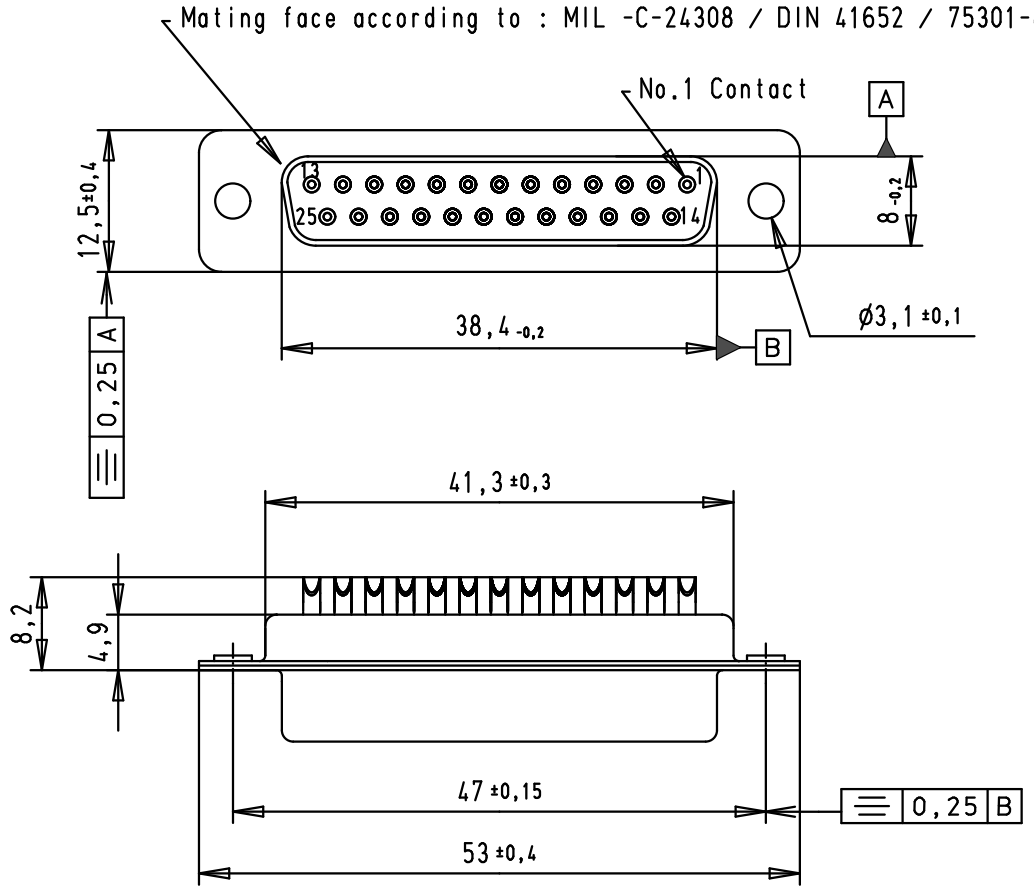

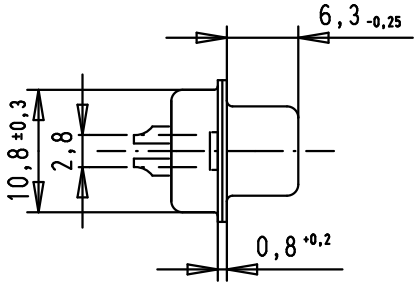

Max wire ø 1,0 mm

SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	47pf±20%
Working Voltage	100V
Current Rating	7,5Amp
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

Mod.	Dat.	Name
36283	12/01/12	SD
31897	17/05/04	AF
31058	8-Jul-02	CV

	Dat.	Name
Detail.	8-JUL-02	CV
Insp.	12/01/12	JB
Stand.		

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, female, straight, 25 Poles, with turned solder bucket and hole

TB 0964311721**0**

Sub.

Mo?Mstab/ *Scale* 1.5:1

Blatt/ *Page* 1/1