



## RSL-2100

# Miniature Xenon Flashlamp System



*Excelitas' RSL-2100 miniature Xenon light source is ideally suited to UV-VIS-NIR applications*

The RSL-2100 compact light source from Excelitas Technologies gives you all the benefits of a typical high power Xenon system in an ultra-compact package.

The RSL-2100 is a miniature, pulsed Xenon system with broadband spectrum from UV to NIR. The system operates at up to 2 watts and produces high peak intensities from 190-2000+ nm.

Similar to all pulsed Xenon systems, the RSL-2100 offers exceptional arc stability, microsecond flash duration and long life characteristics, making it an excellent choice for analytical instruments, machine vision systems, and applications where LEDs can't provide the required intensity.

### Key Features

- Compact size
- High radiant intensity
- Continuous spectrum UV-VIS-IR
- Long life
- Customization is available for specific OEM needs

### Applications

- Absorption analysis
- Immunoassay modules
- Fluorimetry
- Spectroradiometry
- Liquid and gas chromatography
- Colorimetry
- UV-VIS-NIR applications



## RSL-2100

# Miniature Xenon Flashlamp System

### RSL-2100

Electrical Input Specifications	
Parameter	Specification
Voltage	11-15 VDC
DC Current	325 mA Maximum RMS
Peak Current	1.0 Amps
Trigger	+5V, 20-50mA peak input, 10-100µs pulse width, leading edge trigger. Optically isolated internal series resistor = 150Ω.
Input Connector	4-Pin

Electrical Output	
Parameter	Specification
Voltage	600 ± 2% VDC Fixed
Power (Joules/sec)	2 watts max (power = joules x flash rate)
Standard Discharge Capacitor	0.047, 0.10, 0.22 µF
Flash Rate (Hz)	$F_{max} = 2/E$ , where $E=1/2V^2$

Light Output	
Parameter	Specification
Spectral Range	190-2000+ nm
Stability <sup>1</sup>	<3% CV
Lifetime	>1x10 <sup>8</sup> Flashes

<sup>1</sup> CV or Coefficient of variation is defined as:  $CV\% = (\text{Standard Deviation of 20 Flashes}) / (\text{Mean of 20 Flashes})$

Environmental	
Parameter	Specification
Operating Temperature	32 to 104°F (0 to 40°C)
Storage Temperature	-40 to 194°F (-40 to 90°C)
Humidity	95% RH, non-condensing
Shock and Vibration	1.5G, 5-200 Hz (Mil-STD-810C)
Safety Compliance	Designed to meet EN60950


Operating Conditions		
Capacitor (µF)	Max Input/Flash (mJ)	Max Flash Rate @ 600 VDC (Hz)
0.22	40	50
0.10	18	111
0.047	8.5	235

# RSL-2100


## Miniature Xenon Flashlamp System

### Mechanical Dimensions


#### RSL-2100 Outline

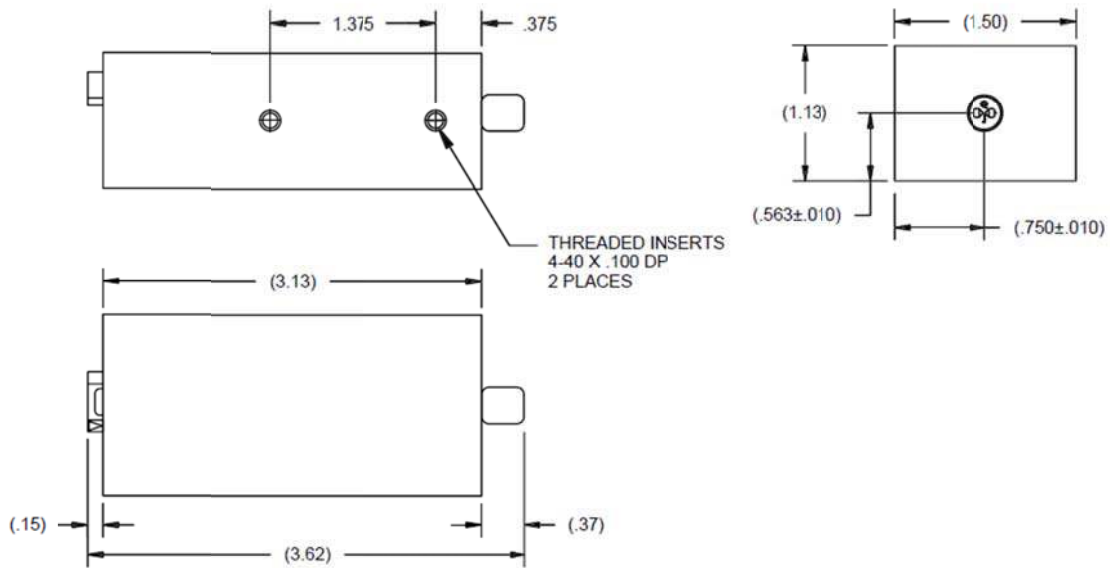

#### RSL-2100 Lamp

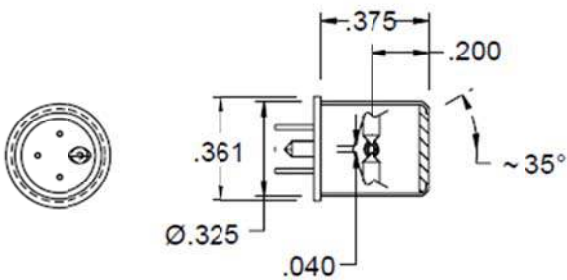

#### Spectral Output

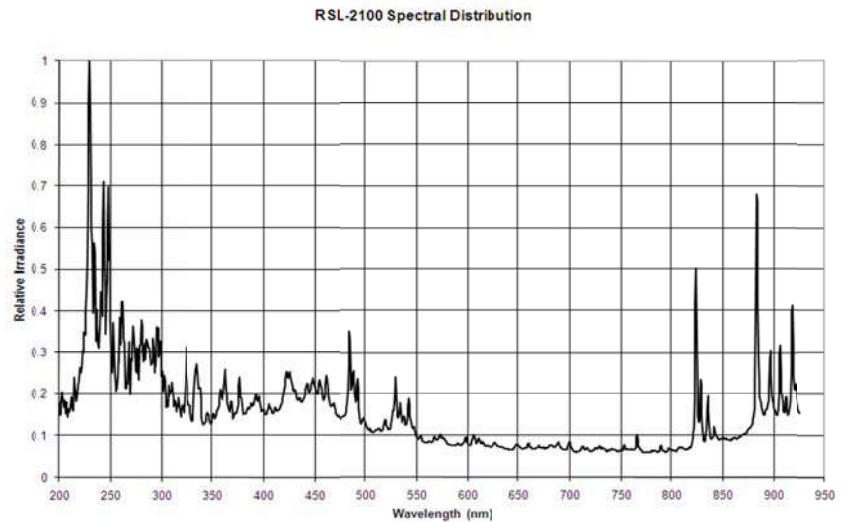

## RSL-2100

# Miniature Xenon Flashlamp System

### Ordering Information: RSL-210A-B

#### Where

**A** = Spectral Distribution

**0** = 250-2000+nm, **1** = 190-2000+nm

**B** = Discharge Capacitor

**1** = 0.22 $\mu$ F, **2** = 0.10 $\mu$ F, **3** = 0.047 $\mu$ F

**\*Part Number Example:** RSL-21003. Spectral Distribution of 250-2000+nm with the 0.047  $\mu$ F discharge capacitor

**NOTE:** All values are nominal; specifications subject to change without notice.

### About Excelitas Technologies

Excelitas Technologies is a global technology leader focused on delivering innovative, customized solutions to meet the lighting, detection and other high-performance technology needs of OEM customers.

From medical lighting to analytical instrumentation, clinical diagnostics, industrial, safety and security, and aerospace and defense applications, Excelitas Technologies is committed to enabling our customers' success in their specialty end-markets. Excelitas Technologies has approximately 3,000 employees in North America, Europe and Asia, serving customers across the world.

**Excelitas Technologies**  
35 Congress Street  
Salem, Massachusetts  
01970 USA  
Telephone: (+1) 978.745.3200  
Toll free: (+1) 800.950.3441  
Fax: (+1) 978.745.0894

**Excelitas Technologies  
LED Solutions, Inc.**  
160 E. Marquardt Drive  
Wheeling, Illinois  
60090 USA  
Telephone: (+1) 847.537.4277  
Fax: (+1) 847.537.4785

**Excelitas Technologies  
Illumination, Inc.**  
44370 Christy Street  
Fremont, California  
94538-3180 USA  
Telephone: (+1) 510.979.6500  
Toll-free: (+1) 800.775.6786  
Fax: (+1) 510.687.1140

**Excelitas Technologies  
GmbH & Co. KG**  
Wenzel-Jaksch-Straße 31  
D-65199 Wiesbaden  
Germany  
Telephone: (+49) 611 492 430  
Fax: (+49) 611 492 165

**Excelitas Technologies Shenzhen Co., Ltd.  
Wearnes Technology Center**  
No.10 Kefa Road, Science & Industry Park  
Nanshan District,  
Shenzhen, Guangdong  
P.R. of China 518057  
Telephone: +86 2655 3861  
Fax: +86 755 2661 7311

For a complete listing of our global offices, visit [www.excelitas.com/ContactUs](http://www.excelitas.com/ContactUs)

© 2011 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

