




PART NO.

RFT-1217-P


| REV | DESCRIPTION | DWN | DATE | APPROVED |
|-----|---------------------|-----|----------|----------|
| B | UPDATED DWG & SPECS | CZ | 11/11/21 | JDMc |

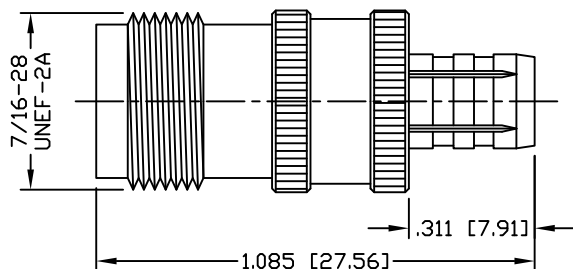

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .255"

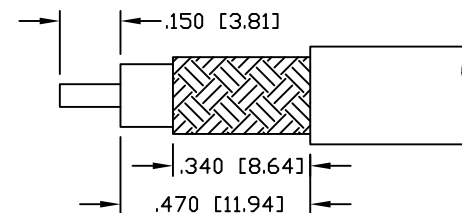

RECOMMENDED STRIPPING INSTRUCTIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-7 GHz

WORKING VOLTAGE: 500 V rms Max. @ Sea Level

TEMPERATURE RANGE: -65°C TO 165°C

FOR ANTENNA SPECIALIST K214 & PRO-FLEX 800, TIMES AA3096 CABLE

| # | DESCRIPTION | QTY | MATERIAL | FINISH |
|---|--------------|-----|----------|---------|
| 5 | COUPLING NUT | 1 | BRASS | NICKEL |
| 4 | FERRULE | 1 | BRASS | NICKEL |
| 3 | CONTACT | 1 | BRASS | GOLD |
| 2 | INSULATOR | 1 | DELTRIN | NATURAL |
| 1 | BODY | 1 | BRASS | NICKEL |

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
C. ZUÑIGA 11/11/21

CHECKED

ORJ DRAWN
J. BENZ 12/22/92**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors

RFINDUSTRIES.COM
7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

TNC FEMALE CRIMP

RIGHT ANGLE

DWG #

RFT-1217-P

| CABLE GROUP | CONTROL # | SCALE | FORMAT | SHEET | REVISION |
|-------------|-----------|-------|--------|--------|----------|
| P | 000000 | NTS | A | 1 OF 1 | B |