

REV. 3
DCO 102710


COIL: @ 25°C
 RESISTANCE _____ 7600 OHMS ±10%
 NOMINAL VOLTAGE _____ 120.0 VDC
 MUST OPERATE _____ 65.0 VDC

 MUST RELEASE _____ 36.1 VDC MAX, 7.7 VDC MIN.

ENVIRONMENT:
 VIBRATION _____ 10 _____ CPS TO _____ 2000 _____ CPS @ _____ 20 _____ g's
 SHOCK _____ 50 _____ g's _____ 11 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE & RELEASE 15 MS MAX.
 _____ OPERATE BOUNCE 5 MS MAX.
 _____ RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

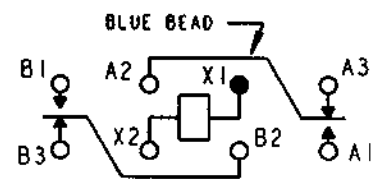

TERMINAL VIEW

CONTACT RATING: _____ 10 AMPS 28 VDC
 _____ 5 AMPS 115 VAC/400 Hz RESISTIVE
 _____ 50,000 OPERATIONS

DR. BSH 8/17/01

CK. TLG 8-17-01

CII Technologies
 advanced control electronic solutions

CUST. _____ OPL
 CUST. NO. _____ M5757/23-027 REV. _____

"07" RELAY

B07D992BE2-0132