

RF Attenuator, 2.92mm Male to 2.92mm Female, 40 GHz, 20 dB, 2 Watts. VSWR up to 40 GHz is 1.25 max.

#### **Product Features**

P1dB's P1AT-29MF-40G2W-20 is a 50 Ohm coaxial attenuator operating to 40 GHz. The connectors are 2.92mm male to 2.92mm female. Attenuation is 20 dB.

Max VSWR to 40 GHz is 1.25. Maximum input power is 2 Watts. The attenuator body is passivated stainless steel.




### **Electrical Specification: T**<sub>Ambient</sub> = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		40.0	

#### **Mechanical And Environmental Specifications:**

Parameter	Description	Notes
Connector 1	2.92mm Male	
Connector 2	2.92mm Female	
RoHS Compliance	Yes	

## **Drawing**

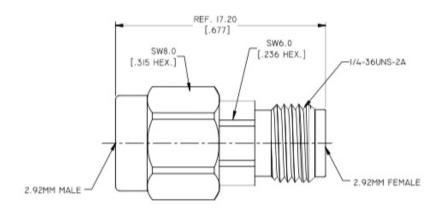



# P1AT-29MF-40G2W-20

RF Attenuator, 2.92mm Male to 2.92mm Female, 40 GHz, 20 dB, 2 Watts. VSWR up to 40 Ghz is 1.25 max.

**Product Notes**