



P1,P2:	M-269E
P3:	M-438A
P4:	M-323C

Customer No: No.1

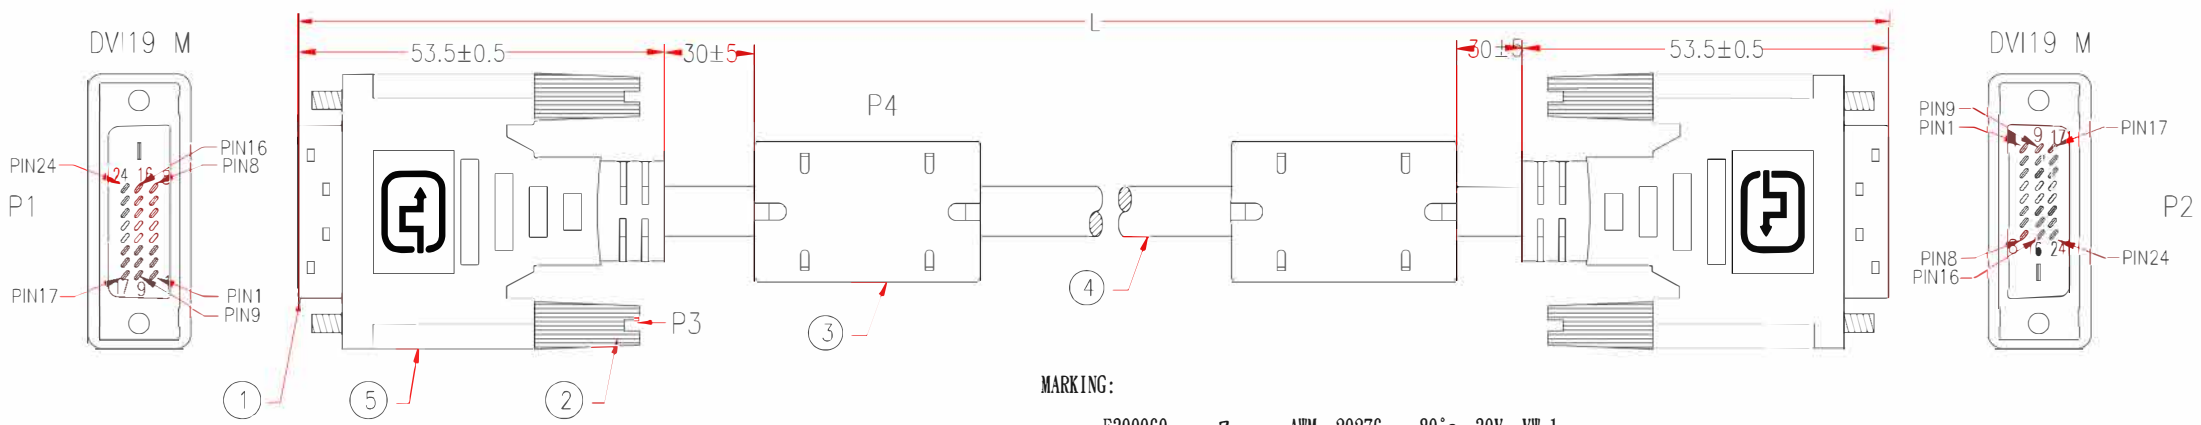

MARKING:

E300060 ♂ AWM 20276 80°C 30V VW-1
 CSA 204790 I/II A 80°C 30V FT1 MSL DVI CABLE

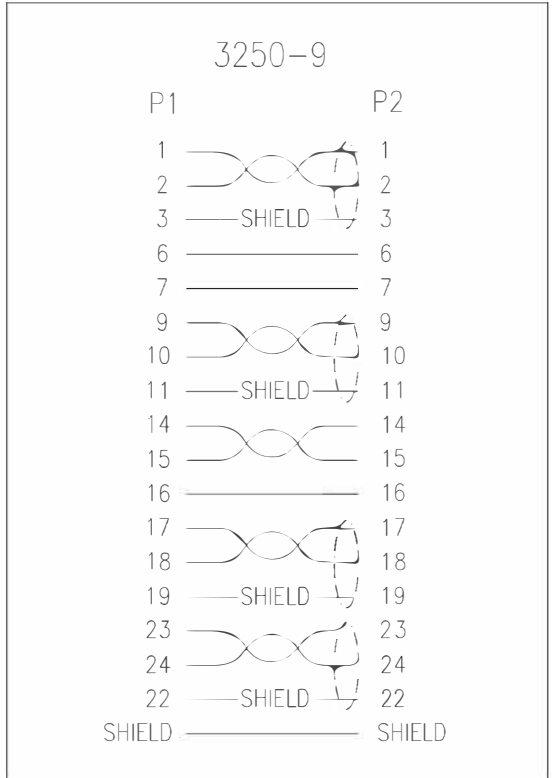

NOTE: All relevant materials are complied with RoHS directive.

No.	Description	Part No.	Q'TY	Supplier
5	UL1061 26AWG INSULATOR WIRE, LENGTH 28mm, DRAWING No. EHO02601C-013	H5SE06-0304W01	2	M304
	BLACK HEAT SHRINK TUBE ϕ 0.8*4mm	A4HA22-0959	8	M959
	BLACK HEAT SHRINK TUBE ϕ 1.0*20mm	A4HA23-0959	2	M959
	BLACK HEAT SHRINK TUBE ϕ 1.5*2mm	A4HA24-0959	8	M959
	BLACK HEAT SHRINK TUBE ϕ 2.0*4mm	A4HA25-0959	8	M959
	DVI19 TINPLATE	A6GE09-0636	2	M636
	ASSEMBLY PVC BOOT, COLOR BLACK	H1BF01-0304K09	2	M304
4	UL20276 [(28AWG*1Pair+D+FAM)*4Pcs+(28AWG*1Pair)+(28AWG*3C)]+AM+AMA BRAID DVI CABLE, OD 7.3mm, JACKET BLACK, DRAWING No. EAAB32804P2801P2803C-289	H5DF03-0304K09	L-20mm	M304
3	FERRITE CORE 17.5*8.4*28.5mm	A6FA12-1084	2	M1084
	MOLDED PVC BLACK	H1BF01-0304K09		M304
2	MOLDED THUMBSCREW #4-40, LENGTH 44.25mm, BLACK	A6AE03-0095	4	M95
1	DVI19 MALE, GOLD PLATING ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR	A1QB03-0636	2	M636
No.			Q'TY	Supplier

APPROVED

CHECKED HU

DRAWING

DATE

Cable Length Unless Other Spec.
 Tolerances:
 0 ~200mm ±10mm
 201~1000mm ±20mm
 1001 ~1500mm ±25mm
 1501~2100mm ±30mm
 2100mm↑ ±40mm