
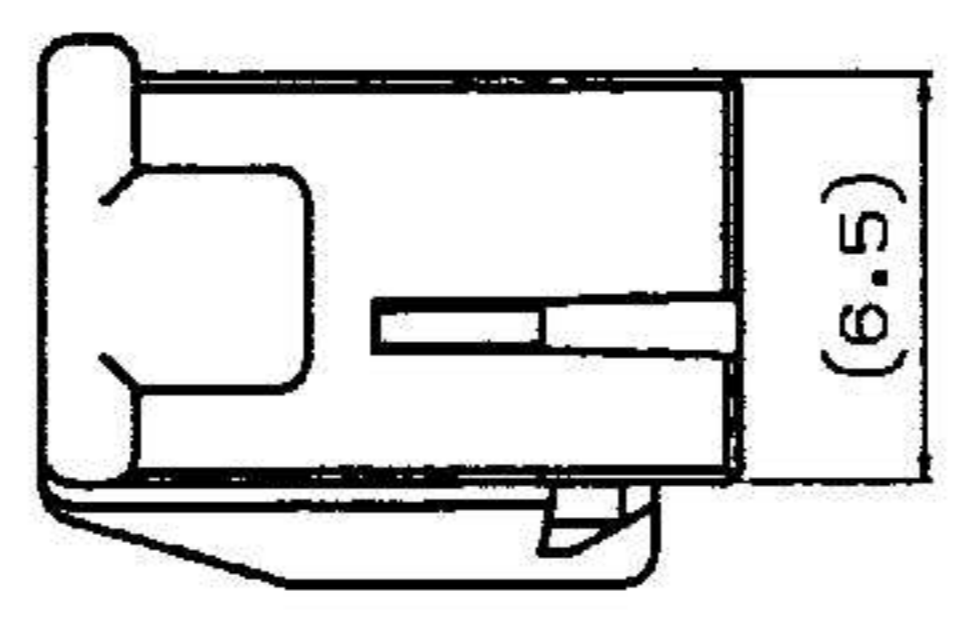
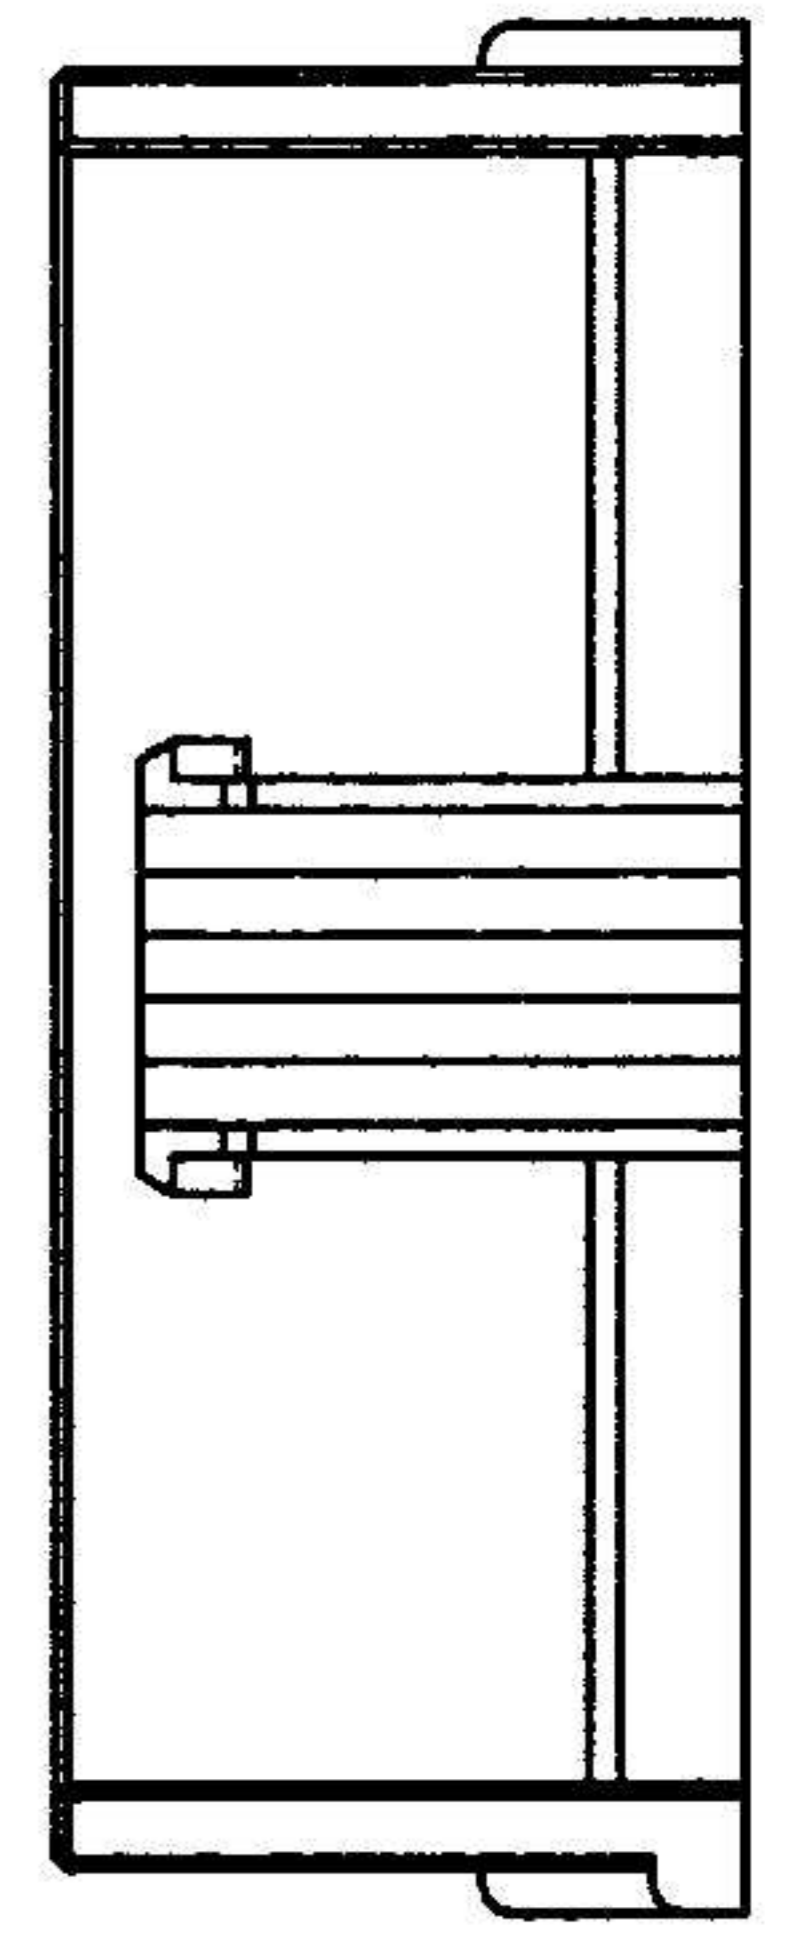
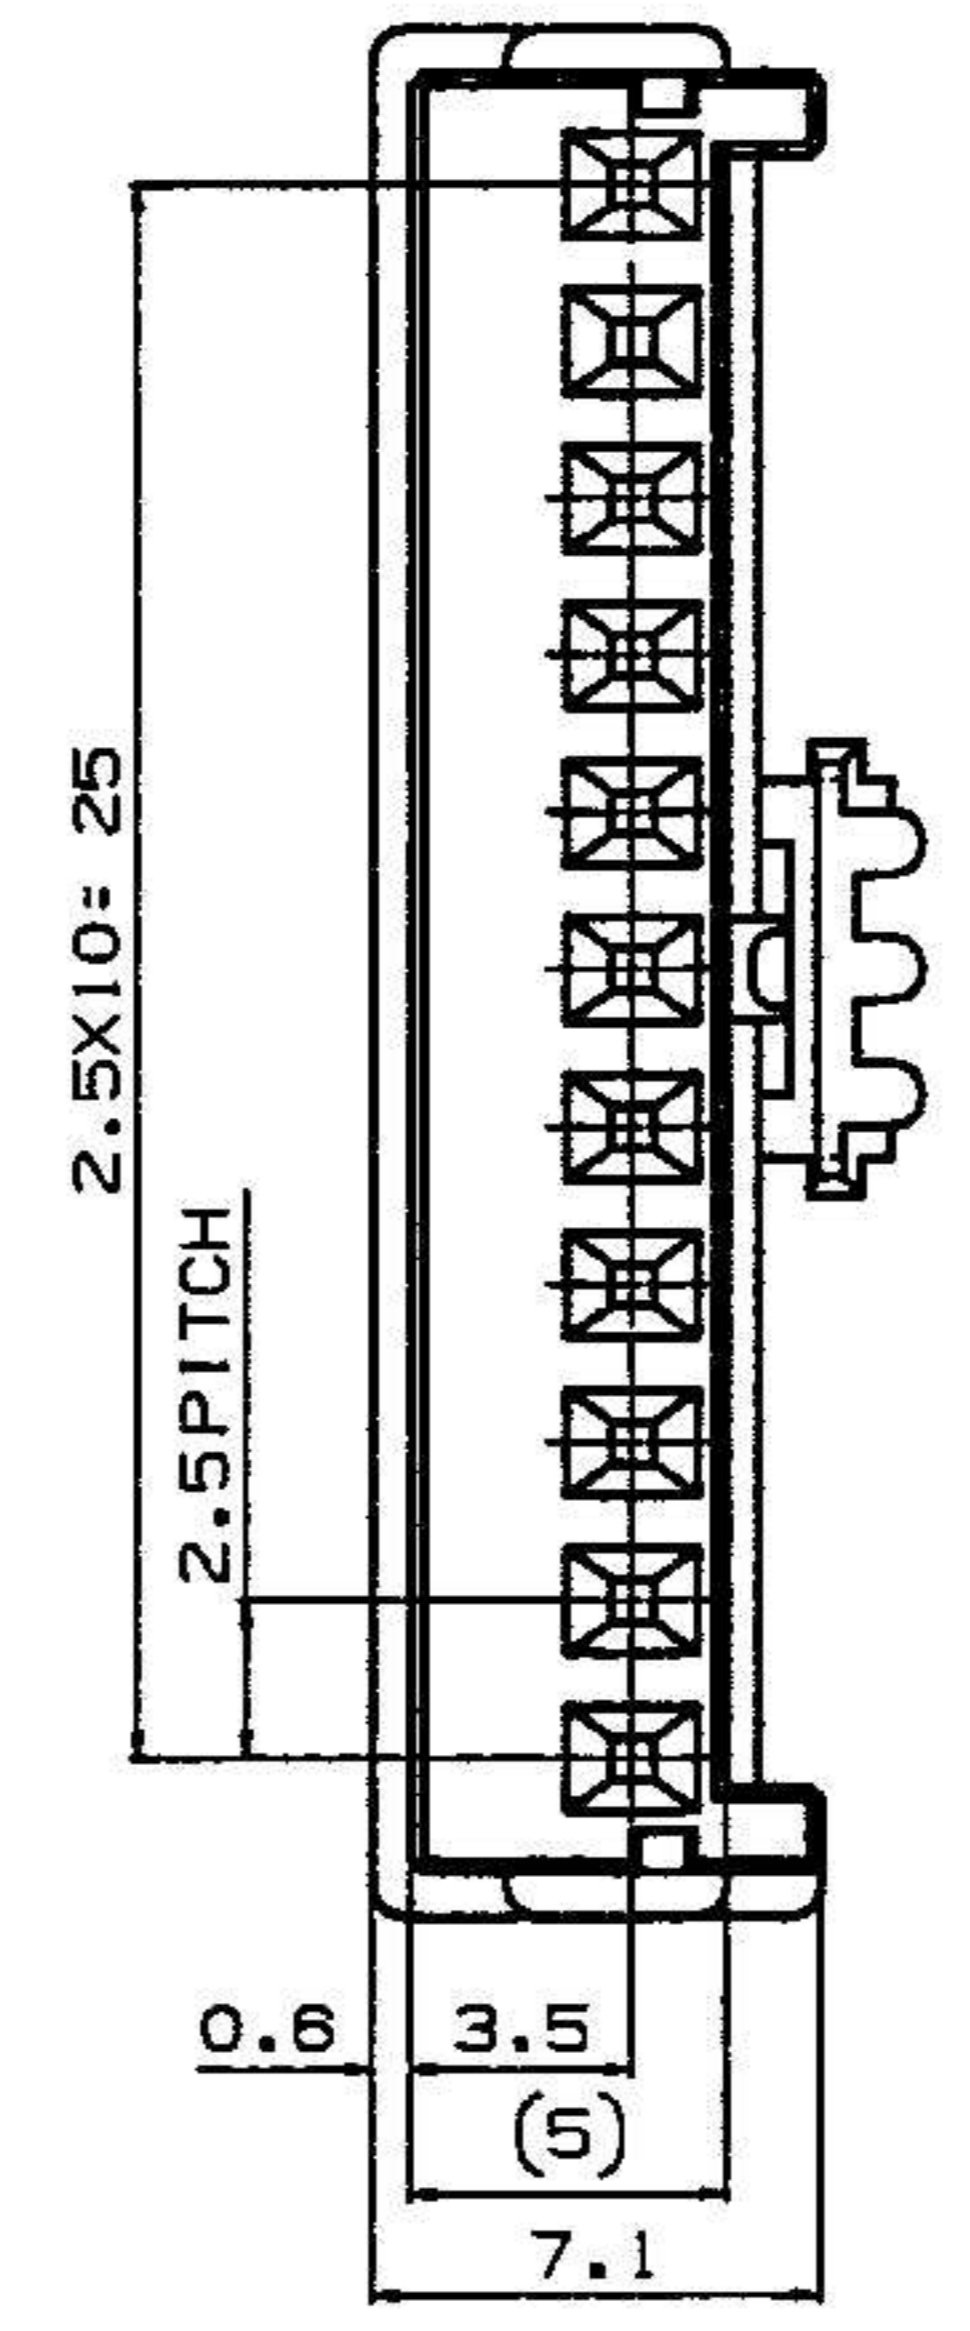
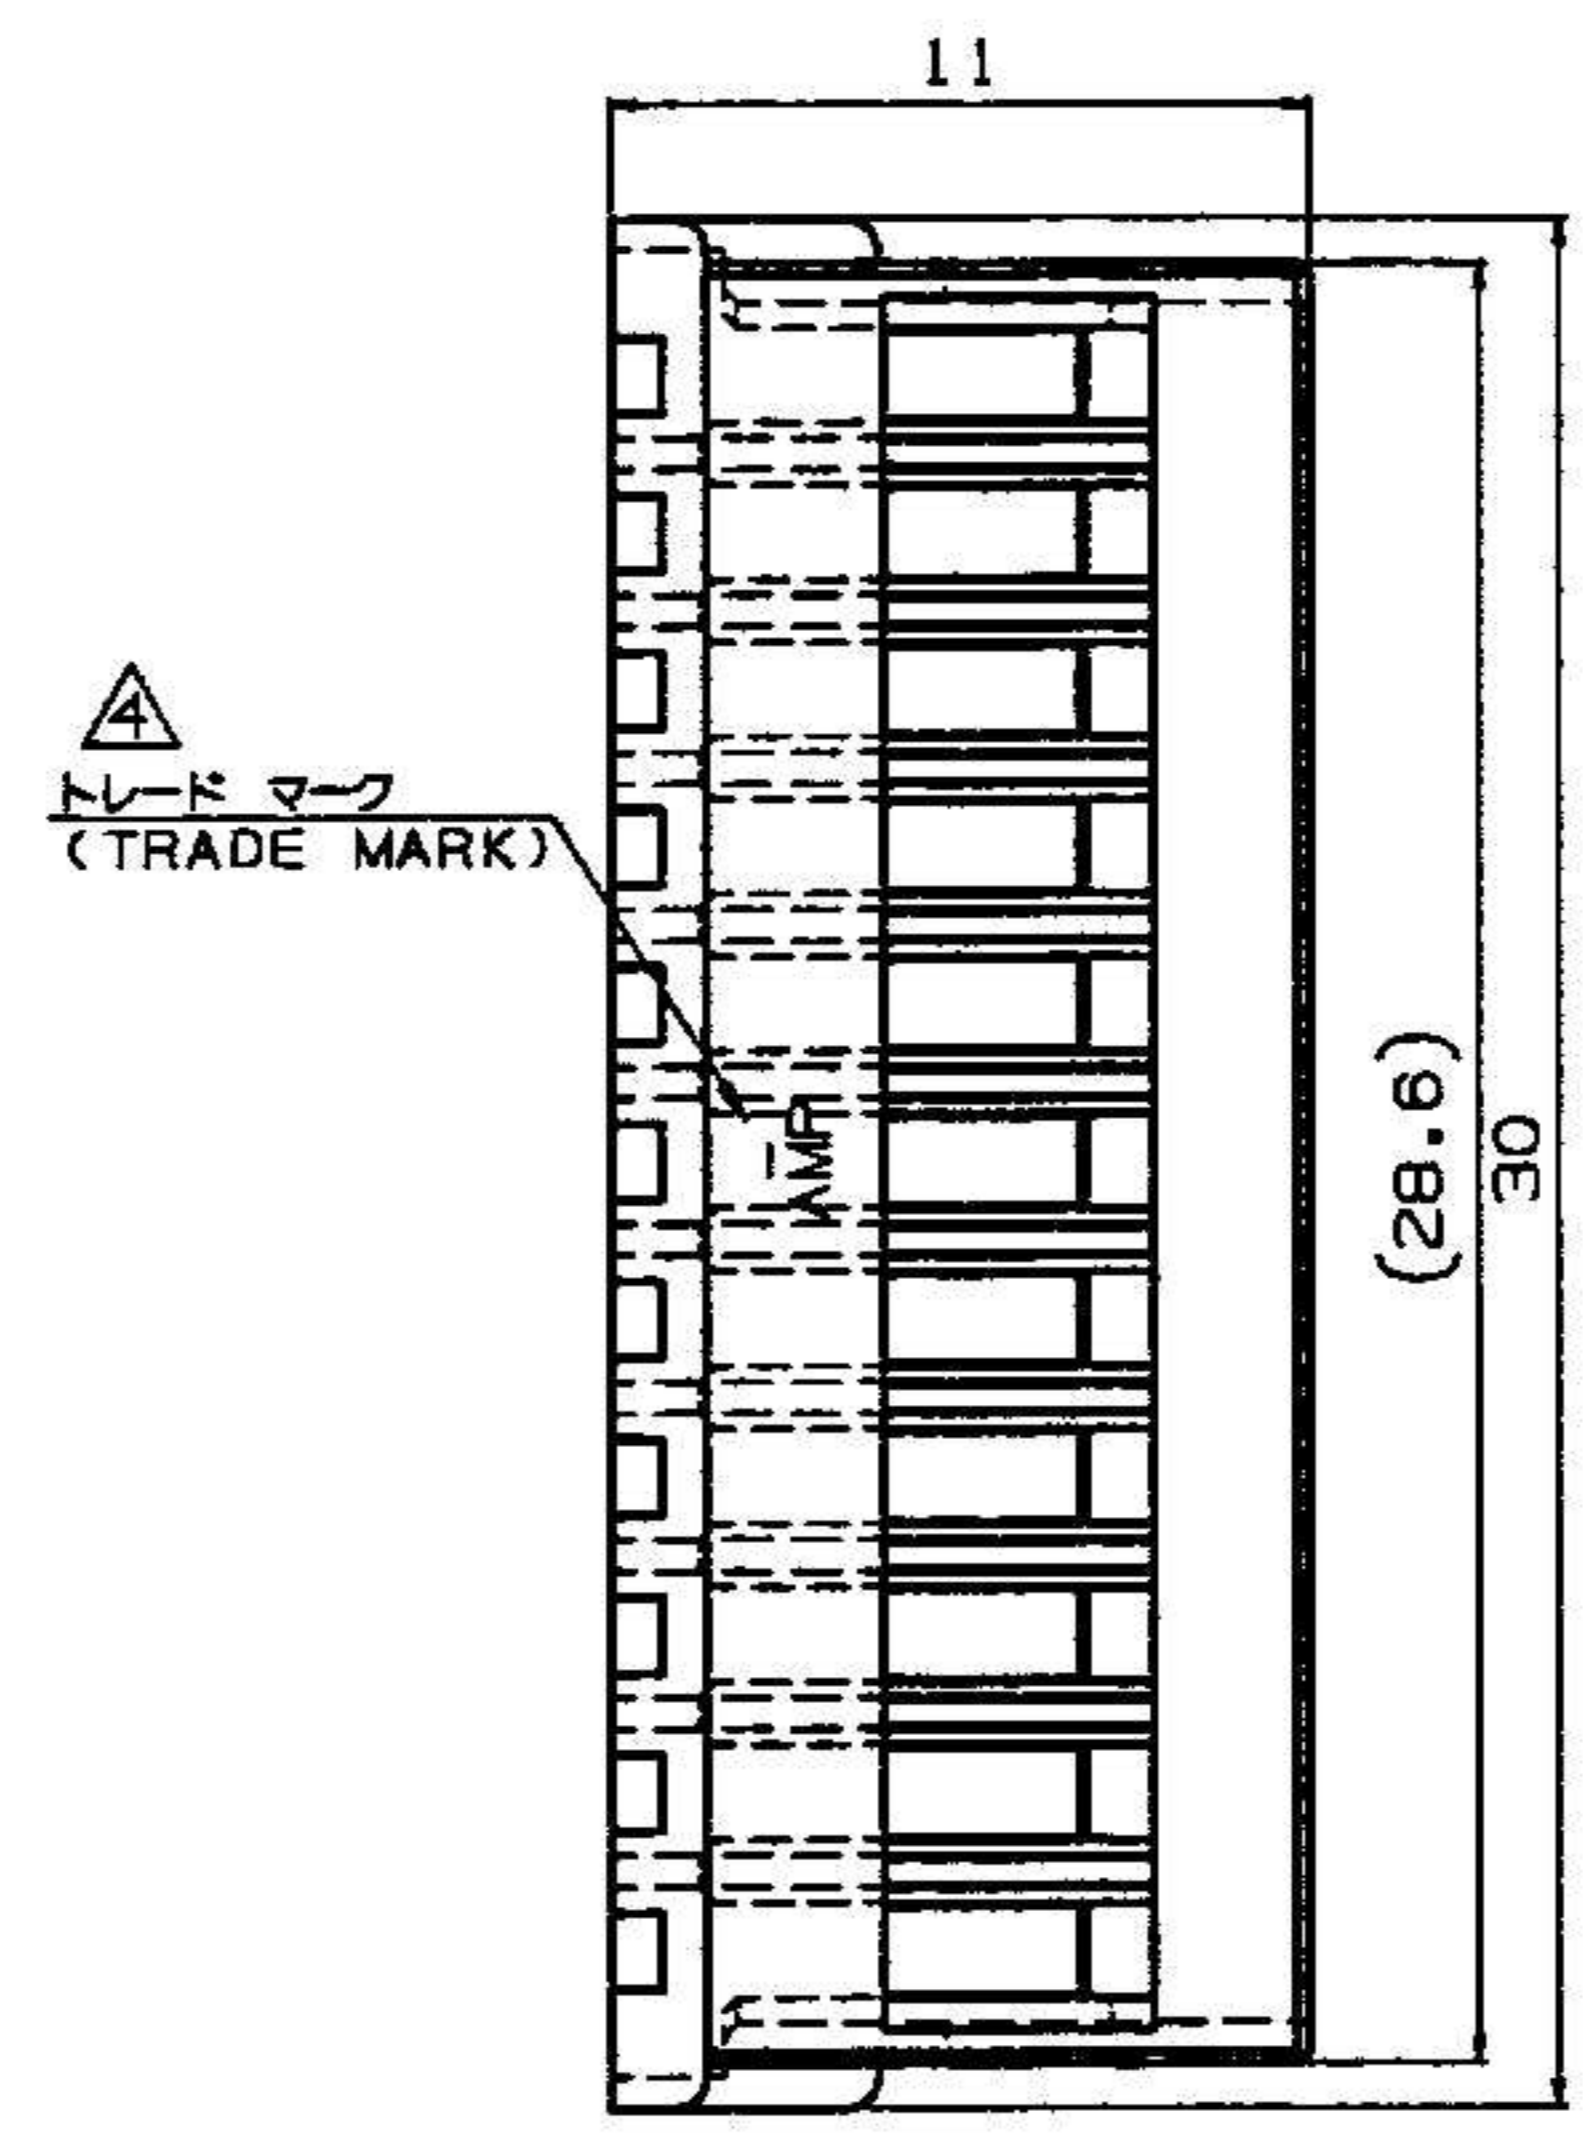


NUMBER C-917695  
METRIC  
三角法 (3rd ANGLE PROJECTION)

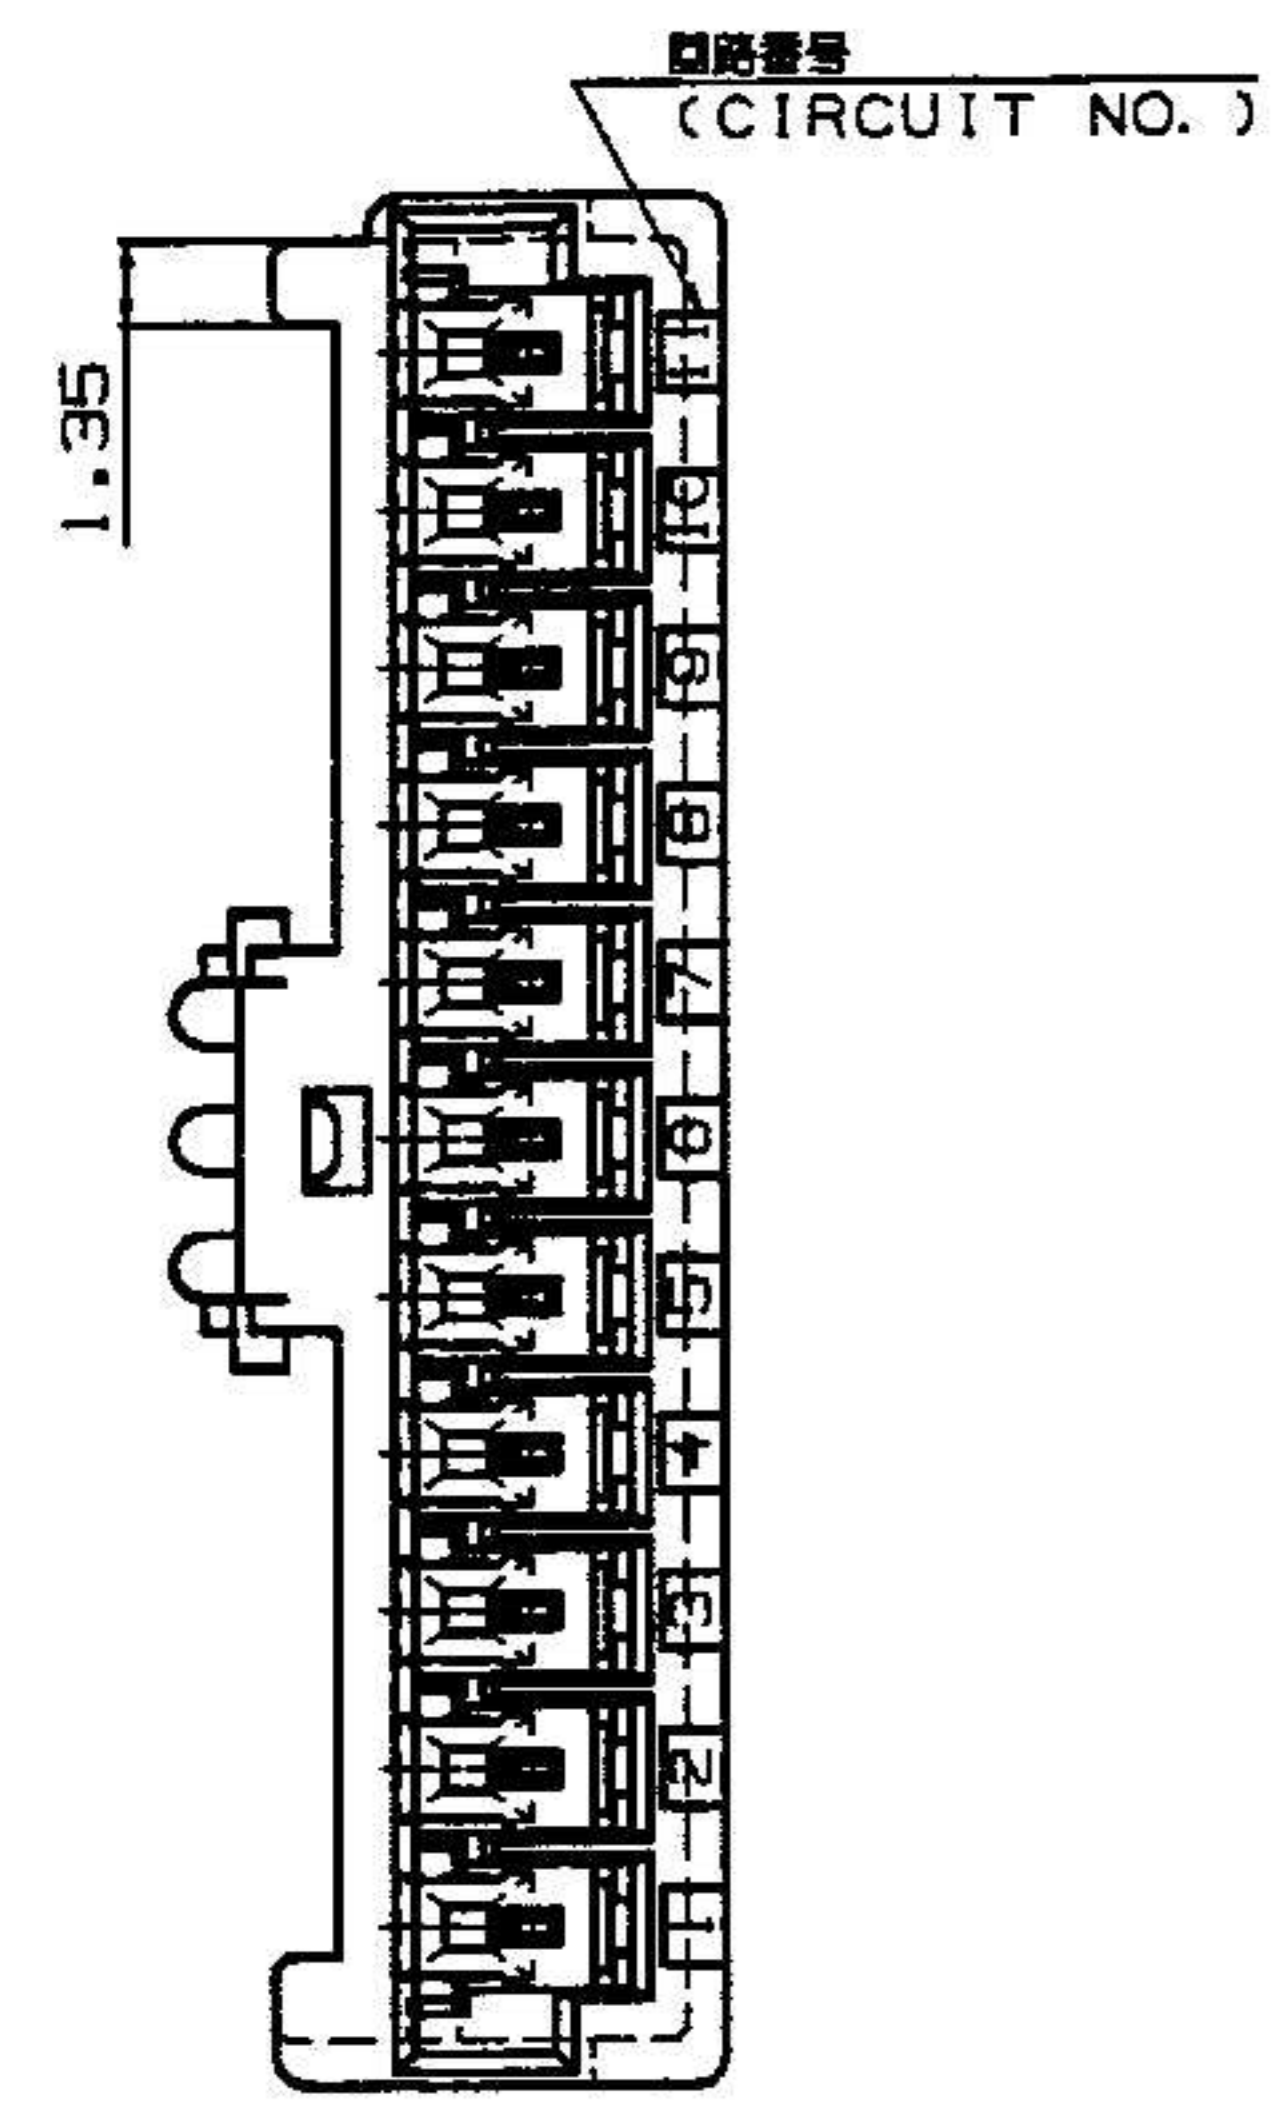

- 注記:  
 1. 材料 : 66ナイロン (UL94V-0)  
 2. 製品規格 : 108-5459  
 3. 取付適用規格 : 114-5203  
 4. 表1参照

NOTES:  
 1. MATERIAL ; 66 NYLON (UL94V-0)  
 2. PRODUCT SPEC. ; 108-5459  
 3. APPLICATION SPEC. ; 114-5203  
 4. SEE TABLE 1  
 5. PART 5-917695-1 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT)

表 1  
TABLE 1

トレード マーク TRADE MARK	生産場所 MANUFACTURING PLACE
-AMP 又は - OR AMP	日本 JAPAN
-+AMP 又は -+ OR AMP	中国 CHINA (PRC)

COLOUR 色調	PART NO. 型番	POS. 種数
NATURAL 自然色	5-917695-1	11
NATURAL 自然色	917695-1	11

				Copyright © 19 年 日本イー・エム・ピー株式会社		Copyright © 19 年 AMP (Japan), LTD. ALL RIGHTS RESERVED.		<b>AMP</b>		日本イー・エム・ピー株式会社 Tokyo, Japan	
C1	REVISED ECR-14-001994	A. Z.	D. Z.	11FEB 2014	適合電線断面積 (WIRE RANGE)	被覆外径 (INSULATION DIA.)	名称 (NAME) 2.5mm シグナルダブルロック 11極 プラグ ハウジング 2.5mm SIGNAL DBL-LOCK 11P PLUG HSG.				
C	変更 (FJ00-5215-96)	N.N.		21.AUG. '96	---	---	一般公差 (GENERAL TOLERANCE) 10mm : ±0.2 10mm以下 : ±0.25 30mm以下 : ±0.3 角度 : ±3°				
B	変更 (FJ00-4976-96)	N.N.	Y.K.	30.JUL. '96	材料 (MATERIAL) SEE NOTE 注記	仕上 (FINISH)	B J C-917695				
A	変更書直し (FJ00-2910-95)	Y.N.	Y.K.	14.MAY. '95	DR. 12.MAY.'95 Y. NOGUCHI	DE. 12.MAY.'95 Y. NOGUCHI	尺 (SCALE) 3-1				
O	作成 (FJ00-2910-95)	Y.N.	Y.K.	12.MAY. '95	CHK. 12.MAY.'95 Y. KASHIWA	APP. 12.MAY.'95 Y. KASHIWA	REV. C1 SHEET 1 OF 1				
LTR	変更 (REVISION RECORD)	DR	CHK	DATE							

PRINT DIST  
単位: 概寸法 IN MM. DO NOT SCALE PRINT