

6

5

4



3

2

1

PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300610179	104007A46M020	6' 6.74' +3.50'/-0' [2M +88.9/-0 mm]

AUX VIEW
SCALE 1:4

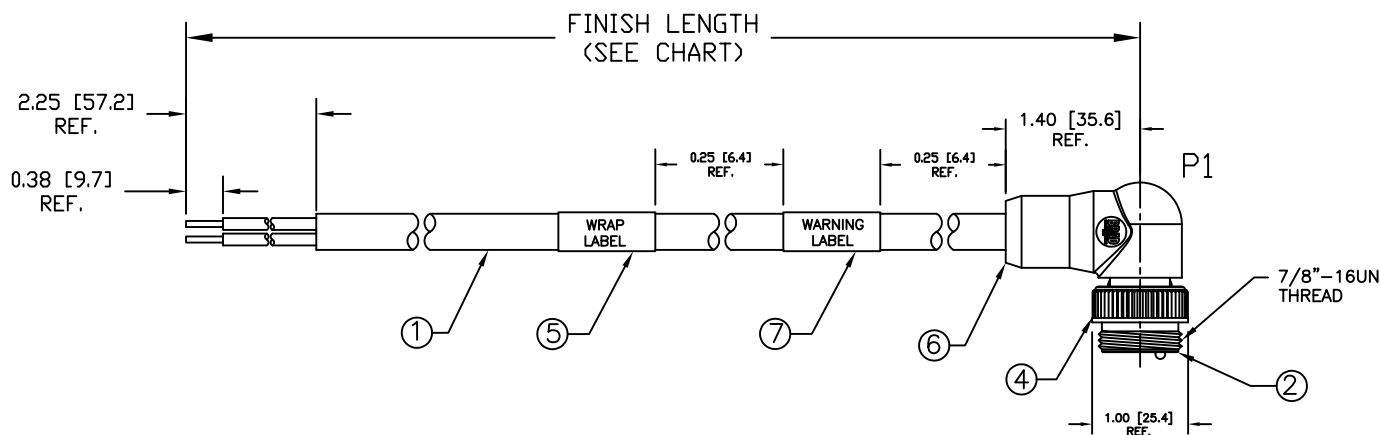


NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
- 4) ELECTRICAL DATA:
INLINE CORDSET
MALE A-SIZE WITH FLYING LEADS
14AWG UNSHIELDED
POLES: 4
MAX. VOLTAGE: 600V
MAX. CURRENT 15A
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 90°C
- 5) PACKAGING:
CABLE ASSEMBLIES ARE BAGGED SEPERATELY
IN POLY BAGS WITH BAR CODE LABEL ATTACHED
TO OUTSIDE OF BAG.
- 6) ASSEMBLY IS RoHS COMPLIANT.
- 7) CERTIFICATION:
UL2237, FILE NO. E258922

P1

WIRING DIAGRAM	1
BLACK	1
WHITE	2
RED	3
GREEN/YELLOW	4

WIRING DIAGRAM

FACE VIEW
MALE

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH
7	1	DANGER LABEL	VINYL	BLACK
6	A/R	MOLDING COMPOUND	PVC	GRAY
5	1	WRAP LABEL	VINYL	YELLOW
4	1	MALE COUPLING NUT	ZINC ALLOY	BLACK E-COAT
3	4	PIN CONTACT	BRASS	GOLD PLATE
2	1	4P MALE INSERT	PVC	BLACK
1	SEE TABLE	#14/4 CABLE	PVC JACKET	GRAY

SD RELEASE EC NO.: WNA2010-0426 DRWN: YOU 2010/01/14 CHKD: BWOODMAN APPR: JFMURPHY 2010/01/20	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	INCH/MM	1:2	INCH	
	▽C=0	4 PLACES ±---	---	DRAWN BY DATE		
		3 PLACES ±---	±0.05	CHECKED BY DATE		
	2 PLACES ±0.13	±0.10	APPROVED BY DATE			
	1 PLACE ±0.25	±0.20	JFMURPHY 2010/01/20			
		ANGULAR ±1/2°				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART			
			SIZE A			

6

5

4

3

2

1