


UMK- EC90/32/EEX-XUL

Order No.: 2975829

The illustration shows version UMK- EC 90/32/EEX-XOL

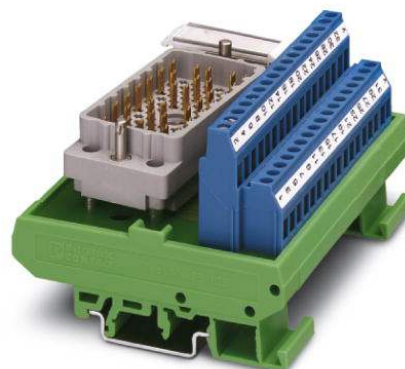

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2975829>

VARIOFACE module, for ELCO plug connector in protection type EEx i, for mounting on NS 35/7.5 or NS 32, with pin strip 8016 left, no. of positions 32

Commercial data	
EAN	4017918089146
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.236 KG
Catalog page information	Page 258 (IF-2007)

Product notes

WEEE/RoHS-compliant since:
01/28/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Nominal voltage U_N	30 V AC/DC
Max. current carrying capacity per branch	2 A
Max. total current of all branches	64 A (32 branches with 2 A each)
Number of positions	32

Width	101.3 mm
Height	58.5 mm
Depth	77 mm
Ambient temperature (operation)	-20 °C ... 40 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	800 V (50 Hz, 1 min)
Mounting position	Any
Standards/regulations	EN 50020

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	ELCO connection
Type of connection	Pluggable

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

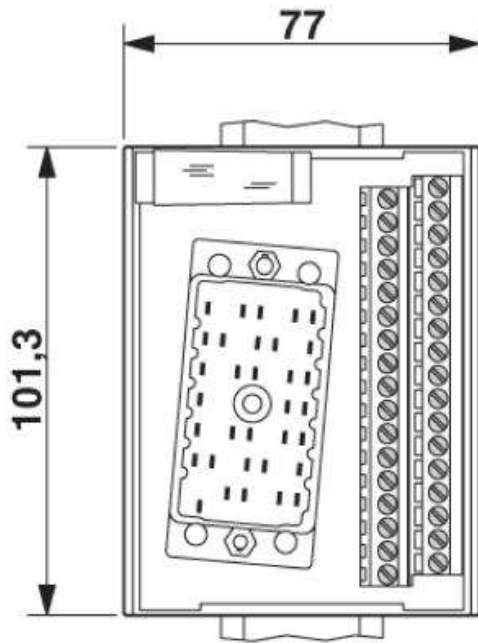

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;