

SERIES: CFM-25B | **DESCRIPTION:** DC AXIAL FAN**FEATURES**

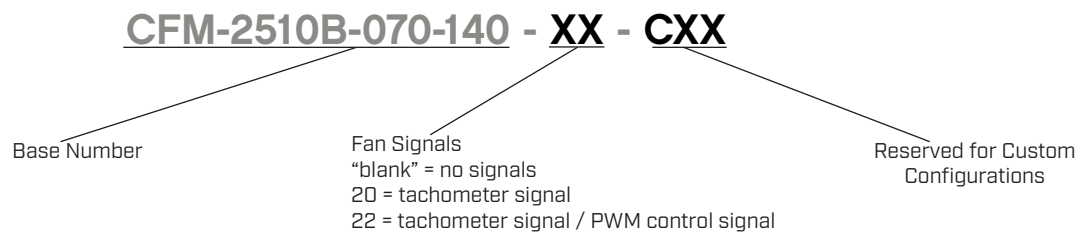
- 25 x 25 mm frame
- multiple speed options for different cooling needs
- auto restart protection standard on all models
- PWM/tachometer wires available
- 5 Vdc and 12 Vdc models available
- dual ball bearing construction

**MODEL**

| MODEL | input voltage | | input current ¹ | input power ¹ | rated speed ¹ | airflow ² | static pressure ³ | noise ⁴ |
|--------------------|---------------|-------------|----------------------------|--------------------------|--------------------------|----------------------|------------------------------|--------------------|
| | rated [Vdc] | range [Vdc] | max [A] | max [W] | typ (RPM±20%) | [CFM] | [inch H ₂ O] | typ [dBA] |
| CFM-2510B-070-140 | 5 | 4.5~5.5 | 0.12 | 0.60 | 7,000 | 1.35 | 0.06 | 14.1 |
| CFM-2510B-0100-218 | 5 | 4.5~5.5 | 0.21 | 1.05 | 10,000 | 1.93 | 0.13 | 21.8 |
| CFM-2510B-0130-275 | 5 | 4.5~5.5 | 0.23 | 1.15 | 13,000 | 2.51 | 0.22 | 27.5 |
| CFM-2510B-170-140 | 12 | 10.8~13.2 | 0.06 | 0.72 | 7,000 | 1.35 | 0.06 | 14.1 |
| CFM-2510B-1100-218 | 12 | 10.8~13.2 | 0.08 | 0.96 | 10,000 | 1.93 | 0.13 | 21.8 |
| CFM-2510B-1130-275 | 12 | 10.8~13.2 | 0.11 | 1.32 | 13,000 | 2.51 | 0.22 | 27.5 |

Notes:

1. At rated voltage, after 3 minutes.
2. At rated voltage, room temperature, 65% humidity, 0 inch H₂O static pressure.
3. At rated voltage, 0 CFM airflow.
4. Measured in an anechoic chamber as per ISO3745/GB4214-84 at rated voltage, with background noise 20±2 dBA at 1 m from the fan intake.
5. All specifications are measured at 25°C, 65% relative humidity unless otherwise specified.

PART NUMBER KEY

INPUT

| parameter | conditions/description | min | typ | max | units |
|--------------------------------------|------------------------|------|-----|------|-------|
| operating input voltage ⁶ | 5 Vdc input models | 4.5 | 5 | 5.5 | Vdc |
| | 12 Vdc input models | 10.8 | 12 | 13.2 | Vdc |
| starting voltage | 5 Vdc input models | | 3.5 | | Vdc |
| | 12 Vdc input models | | 7.0 | | Vdc |

Note: 6. See Model section on page 1 for specific input voltage ranges.

PERFORMANCE⁷

| parameter | conditions/description | min | typ | max | units |
|-----------------|--|-------|-----|--------|-----------------------|
| rated speed | at rated voltage, 25°C, after 3 minutes | 7,000 | | 13,000 | RPM |
| air flow | at 0 inch H ₂ O, see performance curves | 1.35 | | 2.51 | CFM |
| static pressure | at 0 CFM, see performance curves | 0.06 | | 0.22 | inch H ₂ O |
| noise | at 1 m, rated speed | 14.1 | | 27.5 | dBA |

Note: 7. See Model section on page 1 for specific values.

PROTECTIONS / FEATURES⁸

| parameter | conditions/description | min | typ | max | units |
|--------------------|-----------------------------------|-----|-----|-----|-------|
| auto restart | on all models | | | | |
| tachometer signal | available on “20” and “22” models | | | | |
| PWM control signal | available on “22” models | | | | |

Notes: 8. See Application Notes for details.







SAFETY & COMPLIANCE

| parameter | conditions/description | min | typ | max | units |
|-----------------------|---|-----|--------|-----|-------|
| insulation resistance | at 500 Vdc between frame and positive terminal | 10 | | | MΩ |
| dielectric strength | at 500 Vac, 60 Hz, 1 minute between housing and positive terminal | | | 5 | mA |
| safety approvals | UL/cUL 507, TUV (EN/IEC 62368-1:2020+A11) | | | | |
| EMI/EMC | EN 55032:2015, EN 55035:2017 | | | | |
| life expectancy | at 40°C, 65% RH, 90% confidence level | | 70,000 | | hours |
| RoHS | yes | | | | |

ENVIRONMENTAL

| parameter | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | | -10 | | 70 | °C |
| storage temperature | | -40 | | 75 | °C |
| operating humidity | non-condensing | 35 | | 85 | % |
| storage humidity | non-condensing | 35 | | 85 | % |

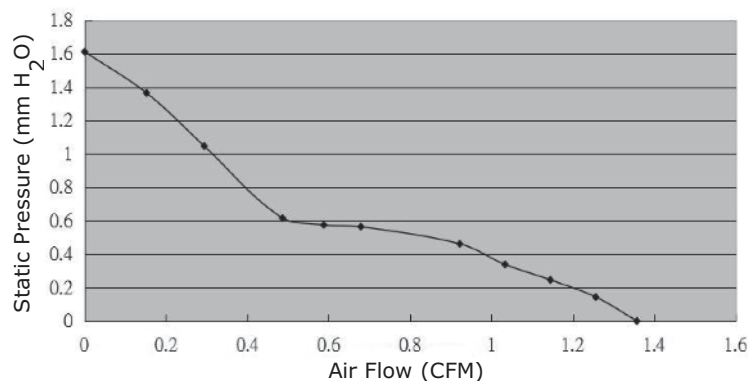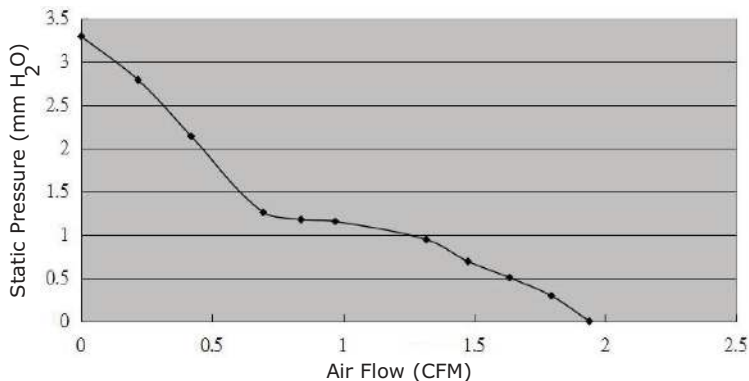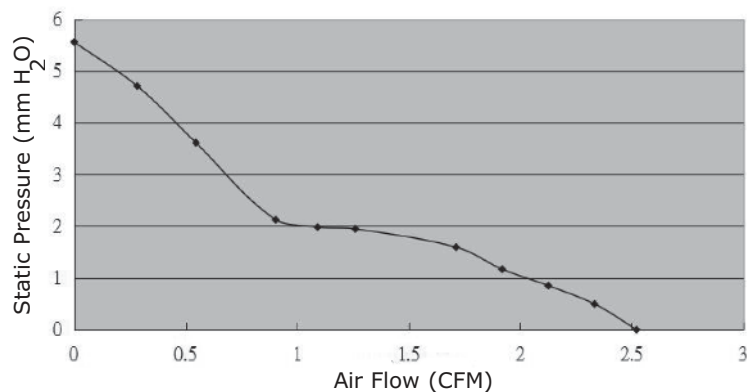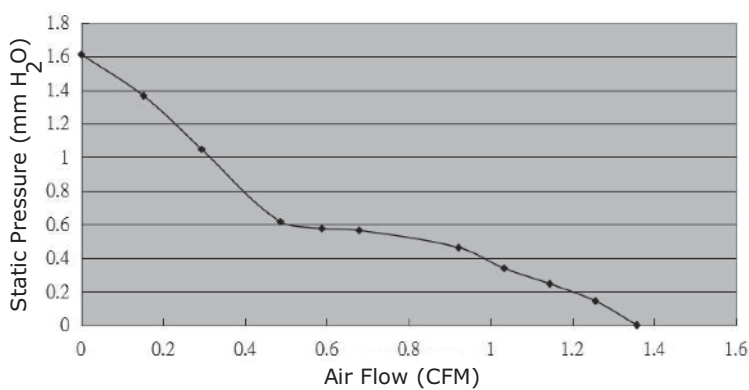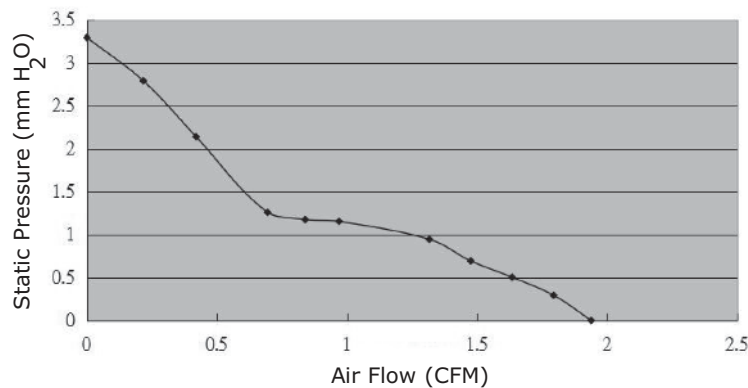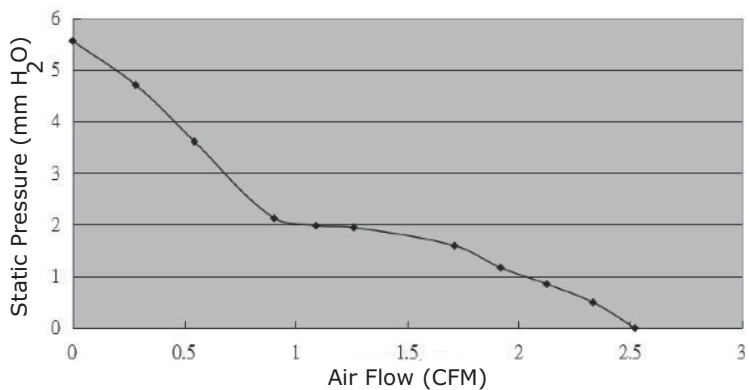PERFORMANCE CURVES

CFM-2510B-070-140**CFM-2510B-0100-218****CFM-2510B-0130-275****CFM-2510B-170-140****CFM-2510B-1100-218****CFM-2510B-1130-275**

MECHANICAL

| parameter | conditions/description | min | typ | max | units |
|-----------------------|--|-----|------|-----|-------|
| motor | 4 pole DC brushless | | | | |
| bearing system | dual ball bearing | | | | |
| direction of rotation | counter-clockwise viewed from front of fan blade | | | | |
| dimensions | 25 x 25 x 10 | | | | mm |
| material | PBT (UL94V-0) | | | | |
| weight | 5 Vdc models | | 6.89 | | g |
| | 12 Vdc models | | 7.0 | | g |


MECHANICAL DRAWING

units: mm


2 wire versions (+Vin & -Vin): UL 1061, 28 AWG
 3 wire versions (+Vin, -Vin, & tach): UL 1061, 28 AWG
 4 wire versions (+Vin, -Vin, tach, & PWM): UL 1061, 30 AWG

| MOUNTING SCREW (Pan Head) | | | |
|---------------------------|------|----------------|------------|
| Screw Type | Size | Standard | Torque |
| Machine Screw | M2.5 | JIS B1111-1974 | 7.5 kgf-cm |


| WIRE CONNECTIONS | |
|---------------------|-------------|
| Wire Color | Function |
| Red | +Vin |
| Black | -Vin |
| Yellow ^a | Tach Signal |
| Blue ^a | PWM |

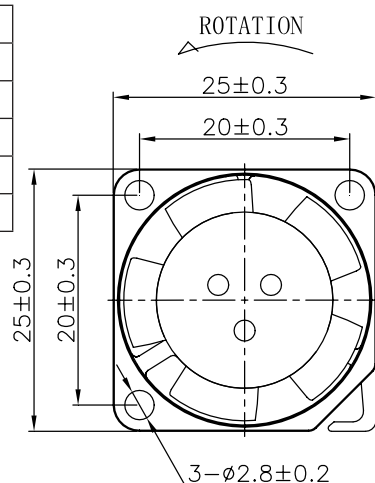

AIR FLOW

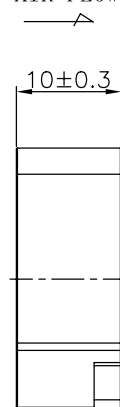

ROTATION

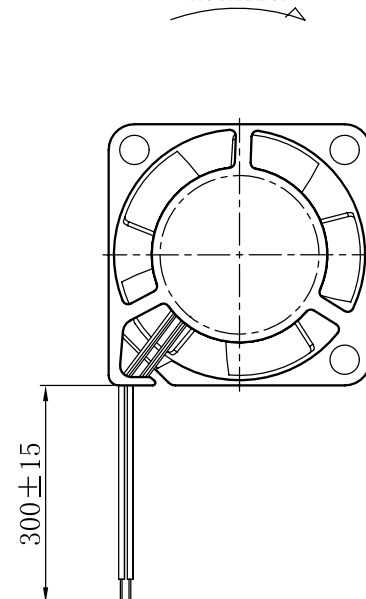

Notes: ^a Wires only present on versions with output signals.

APPLICATION NOTES

Auto Restart Protection

When the fan motor is locked by an external force, the device will temporarily turn off electrical power to the motor and restart automatically when the locked rotor condition is released.

Tachometer Signal (Yellow Wire)

The tachometer signal is for detecting the rotational speed of the fan motor. The output will be a square wave when fan is operating and V_{FG} or V_{CE} depending on the locked rotor position when fan motor is locked (See Figures 1~2 below).

Figure 1: Tachometer Output Circuit


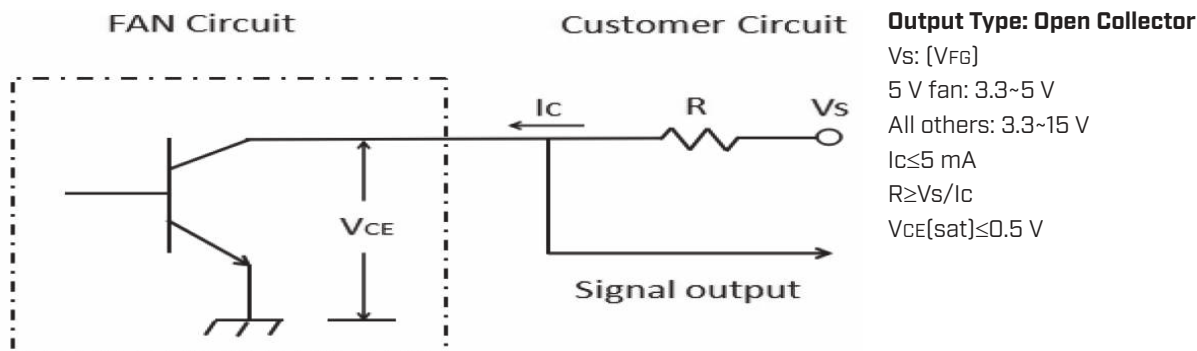



Figure 2: Tachometer Output Waveform

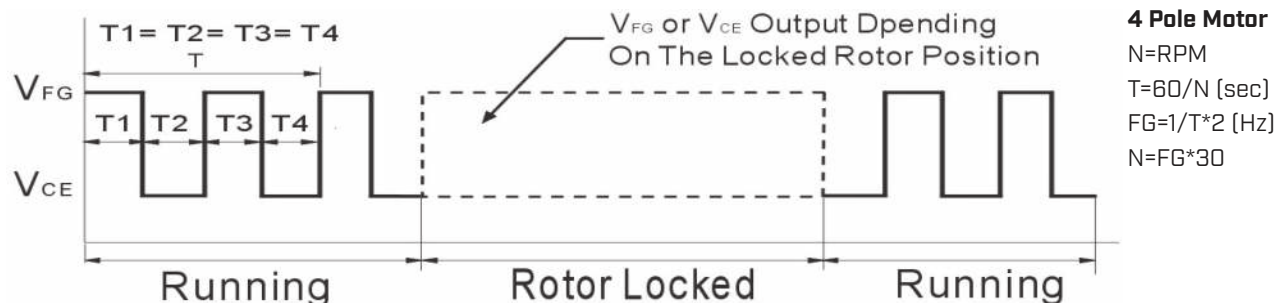

PWM Signal (Blue Wire)

This wire is for speed control of the fan motor using a PWM input signal from the customer circuit (See Figure 3 below).

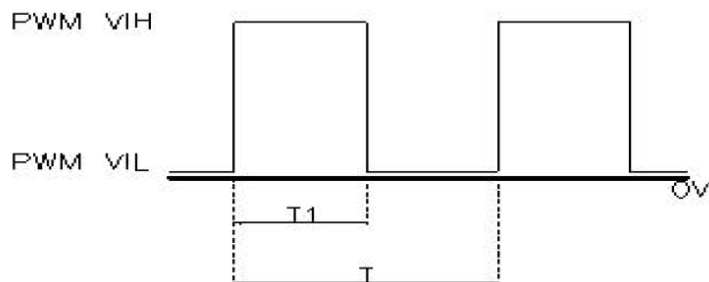Figure 3: PWM Input Signal



PWM Duty Cycle [%] = $T_1/T \times 100\%$
 PWM Frequency Range: 20~30 kHz
 $PWM_{VIH} = 2.8 \sim 5.5$ V
 $PWM_{VIL} = 0 \sim 0.6$ V

REVISION HISTORY

| rev. | description | date |
|------|--|------------|
| 1.0 | initial release | 04/14/2020 |
| 1.01 | added tachometer signal option, updated safeties | 05/19/2021 |
| 1.02 | added PWM signal versions | 05/18/2022 |
| 1.03 | logo, datasheet style update | 08/12/2022 |

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

cuidevices.com