


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

1	2		3	4	5				6	7	8					
Item No.	Part No.		Description		TABLE 1											
1	See Table 1		XSR Connector		ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NO.	TOTAL WIRE REQUIRED							
A 2	UL11136, 36 AWG		Red		1	2	02XSR-36S	A02XSR02XSR36R254B	571 mm							
<table border="1"> <tr> <td colspan="2">Electrical Specifications</td> </tr> <tr> <td colspan="2">Current: 0.2AAC/DC</td> </tr> <tr> <td colspan="2">Voltage: 30V AC/DC</td> </tr> </table>					Electrical Specifications		Current: 0.2AAC/DC		Voltage: 30V AC/DC		1	4	04XSR-36S	A04XSR04XSR36R254B	1034 mm	
Electrical Specifications																
Current: 0.2AAC/DC																
Voltage: 30V AC/DC																
					1	6	06XSR-36S	A06XSR06XSR36R254B	1551 mm							
					1	10	10XSR-36S	A10XSR10XSR36R254B	2585 mm							
					1	16	16XSR-36S	A16XSR16XSR36R254B	4136 mm							
					1	20	20XSR-36S	A20XSR20XSR36R254B	5170 mm							
					1	22	22XSR-36S	A22XSR22XSR36R254B	5687 mm							

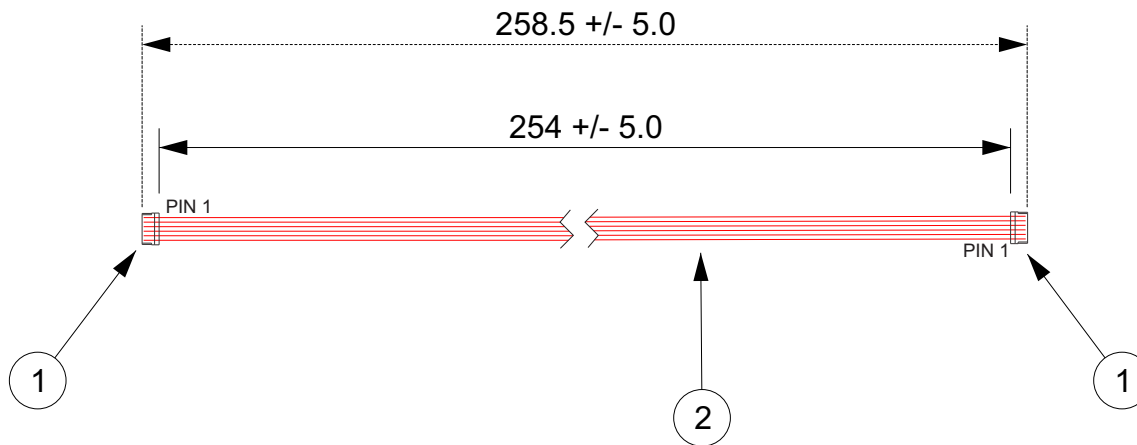

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.				CUSTOMER NAME			
				DESCRIPTION			
0.6mm Pitch XSR Standard Catalog Assembly - 10" Overall Length - Pin Out: 1 to N				SIZE	CUSTOMER PART NO.	PART NO.	REV
Drawn By: Larissa Mosley				SEE TABLE 1			
Checked By: Steven Pilkington				SCALE	1:1	DRAWING NO. GAM-278	DATE 4/06/2018

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	7/03/2018	LM