


## MC 1,5/ 6-ST-3,5 BK BDWH:1-6 - 1705770

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Plug component, Nominal current: 8 A, Number of positions: 6, Pitch: 3.5 mm, Connection method: Screw connection with tension sleeve, Color: black, Contact surface: Tin

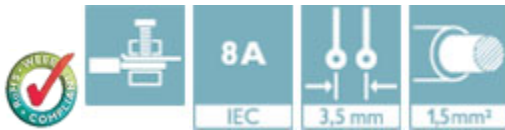

### Key Commercial Data

|                                      |               |
|--------------------------------------|---------------|
| Packing unit                         | 1 pc          |
| Weight per Piece (excluding packing) | 4.4 g         |
| Custom tariff number                 | 85366990      |
| Country of origin                    | United States |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27141190 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440309 |
| eCl@ss 9.0 | 27440309 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

# MC 1,5/ 6-ST-3,5 BK BDWH:1-6 - 1705770

## Approvals

### Approvals

---

#### Approvals

CSA / VDE Gutachten mit Fertigungsüberwachung / CCA / IECEx CB Scheme / EAC / cULus Recognized / EAC

---

#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

CSA

VDE Gutachten mit Fertigungsüberwachung

CCA

IECEx CB Scheme

EAC

| cULus Recognized               |       |       |
|--------------------------------|-------|-------|
|                                | B     | D     |
| mm <sup>2</sup> /AWG/kcmil     | 30-14 | 30-14 |
| Nominal current I <sub>N</sub> | 8 A   | 8 A   |
| Nominal voltage U <sub>N</sub> | 300 V | 300 V |

EAC

---

