



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

**5G/LTE Band 66 / Extended AWS Band  
Downlink  
Ceramic Band Pass Filter  
Part Number: AE2155CB1790**



**Electrical Specifications**

**Center Frequency:** 2155 MHz  
**3dB Bandwidth(BW):** 90 MHz Min.  
**Passband Frequency (PB):** 2110-2200 MHz  
**Insertion Loss in BW :** 3.0 dB Max  
**Ripple In BW:** 1.0dB Max.  
**Return Loss :** 12 dB Min.  
**Rejection1:** 30 dB Min.@ 1780 MHz  
**Rejection2:** 10 dB Min. @ 2250 MHz  
**Power Handling:** 1 W  
**Input / output Impedance:** 50 Ohms


**Mechanical**

**Connector Type:** SMT  
**Dimensions:** 26.4 x 14 x 7.3 mm

**Environmental**

**Operating Temperature:** -45°C to +85°C  
**Storage Temperature:** -50°C to +90 °C  
**Shock:** 10G. 11ms  
**Vibration:** 10G 0.5 to 200 Hz

**Outline Drawing:**

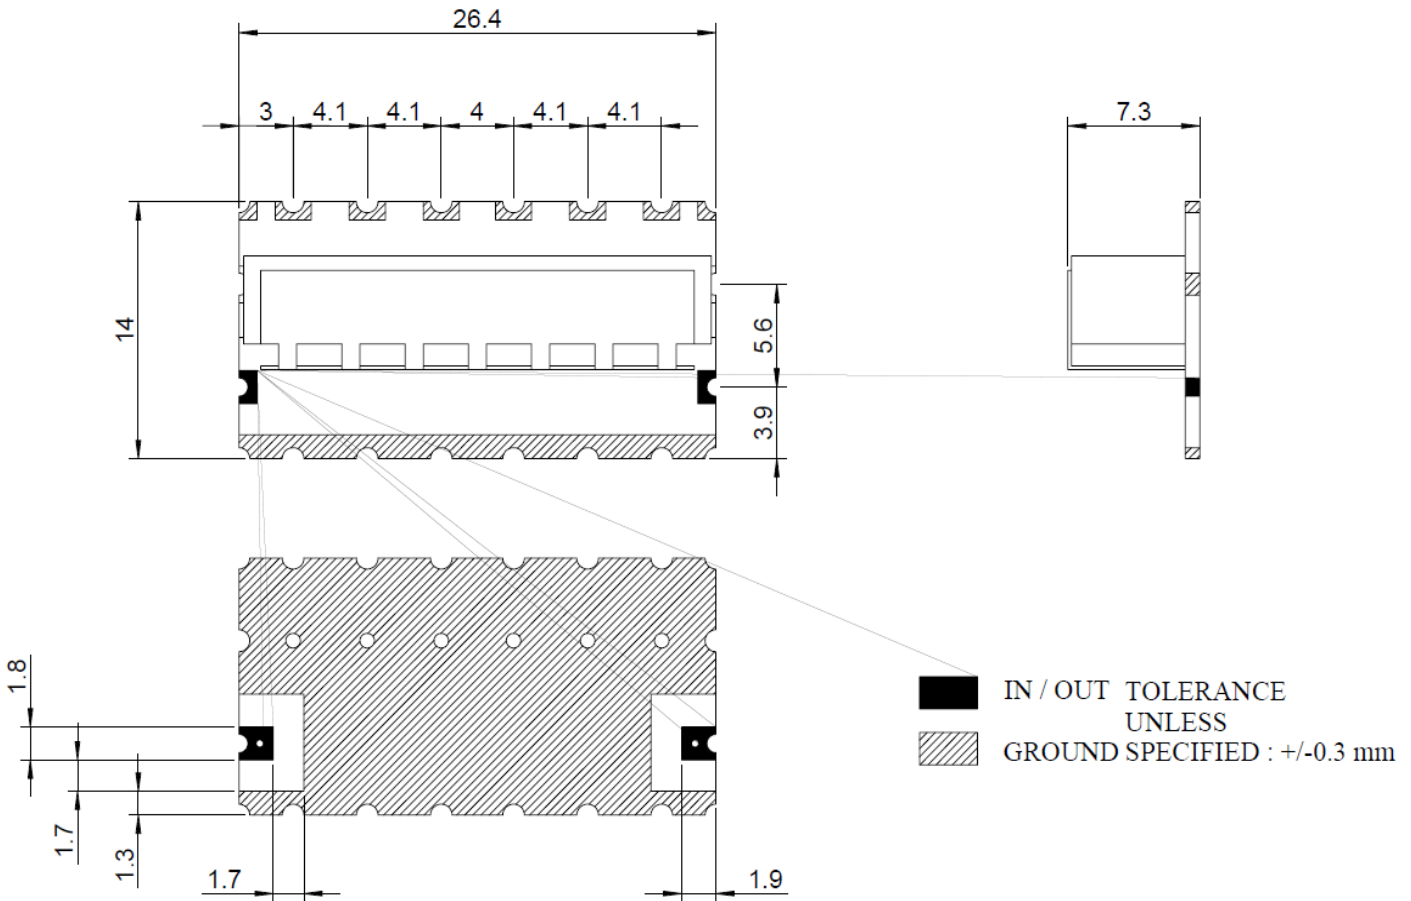

Tolerance: +/-0.01 inches [ +/- 0.3mm]

Angles: +/- 1 Deg.

\*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

\*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.