### S21F2C-P06MFD0-450S


series\_f, type\_s2



#### **General information**

Part number	S21F2C-P06MFD0-450S	
Termination	solder	
Size	1	
Locking principle	push	C C MIL ES
Coding	2_halfshell	
Cable Diameter	cable_mini_45	
Cable outlet	bend_relief	



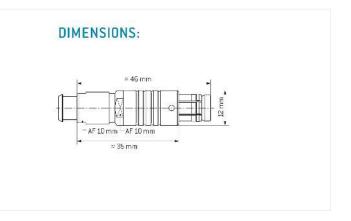

## Contact insert description

6
pins
07mm
peek
26_awg
solder
065mm

reverse\_gender\_on\_request

### **Technical information**

Max. creepage and air clearance distance	08_mm	08_mm
Nominal current single contact	06_a	iec_60512_5_2
Nominal current insert	4,5 A	vde_0298_4
Test voltage	12_kv_ac	sae_13441
safety_text		

# Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated\_unmated

### Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety\_text\_2 ul\_text illustrative\_text