



soberton inc.

DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-3605-1Y



Release | Revision: A/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker.

Page 1

Speaker Specification

Page 2

Measuring Circuit

Typical Frequency Response Curve

Page 3

Dimensions

Speaker Specification

Item	Specification	Testing Condition
Dimensions	Ø36 x H5.2mm	
Voice Coil Impedance	8Ω ±15%	At 1.5KHz 1.0V
Resonant Frequency	520±20%Hz	At 1.0V
Output S.P.L.	80±2dB at 1.0, 1.2, 1.5, 2.0 KHz in average	At 1.0m /1.0W
Frequency Response	f0~5.0KHz	-10dB
Rated Input Power	1.5 W	
Max Input Power	2.0 W	
Distortion	≤ 7 %Max	
Operation	Must be normal	Program Source 1.5 W
Noise	Must be normal	Sine Wave 2.83 V
Heat Test	Meet items 8 & 9 after test	50±2°C 96 hours
Humidity Test	Meet items 8 & 9 after test	40±2°C 90~95%RH 16 hours
Load Test	Meet items 8 & 9 after test	1.5 W 100 hours
Magnet	Φ12.5 x 1.5mm NdFeB	
Net Weight	8.5g	
Polarity	When a positive DC current is applied to the terminal marked(+), the diaphragm moves forward.	



soberton inc.

DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-3605-1Y



Release | Revision: A/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker.

Page 1

Speaker Specification

Page 2


Measuring Circuit

Typical Frequency Response Curve

Page 3

Dimensions

Measuring Circuit

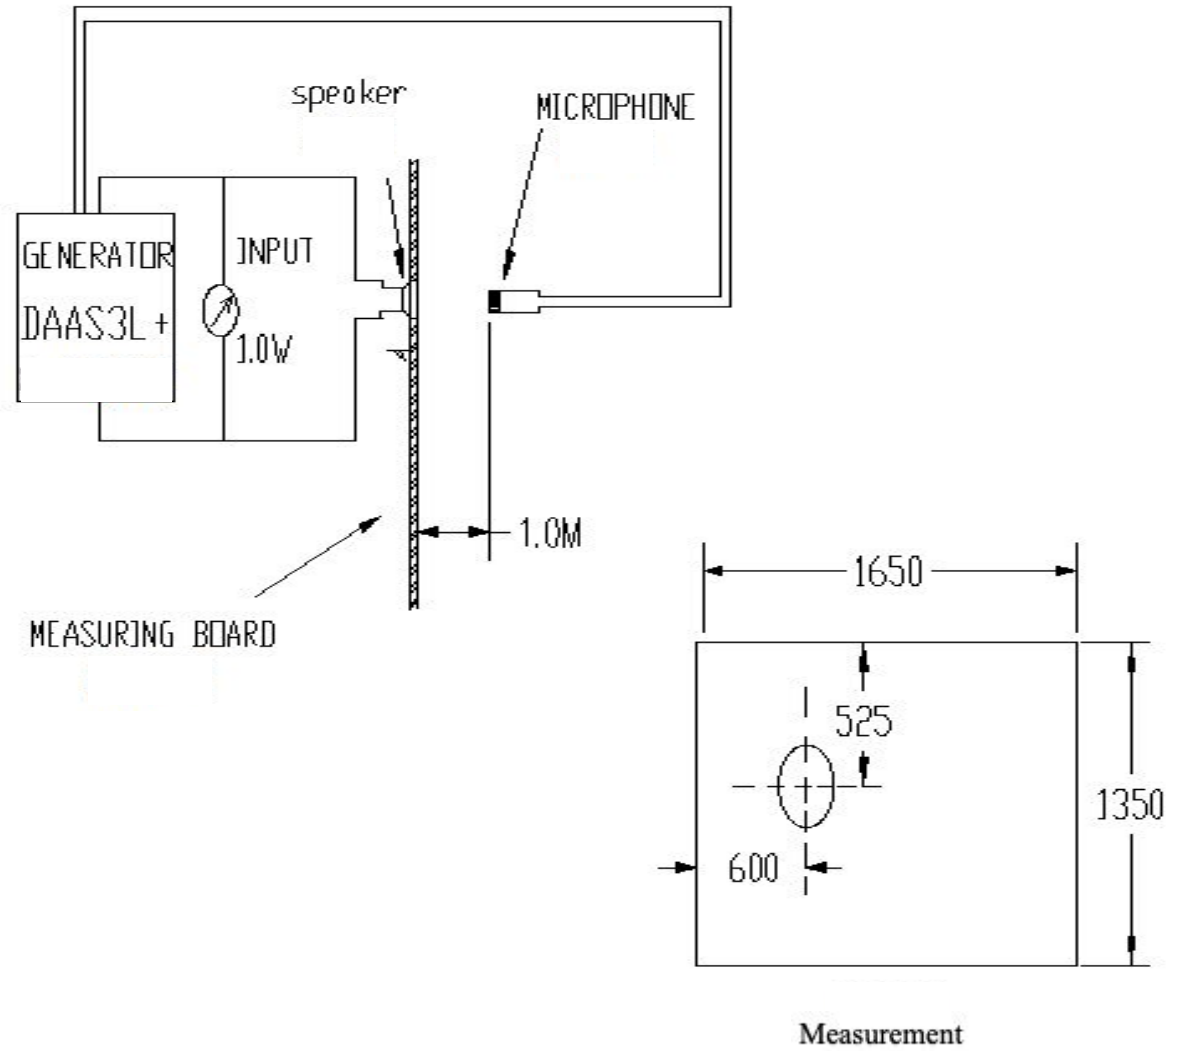

Typical Frequency Response Curve





soberton inc.

DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-3605-1Y



Release | Revision: A/2018

CONTENTS

This document contains the technical specifications for the dynamic speaker.

Page 1

Speaker Specification

Page 2

Measuring Circuit

Typical Frequency Response Curve

Page 3

Dimensions

Dimensions

Tolerance: $\pm 0.3\text{mm}$

