


AS01308MR-R 13mm Speaker

3541 Stop Eight Road • Dayton, Ohio 45414


Product Overview

- 13mm diameter speaker with Neodymium magnet for 86 dB sensitivity
- \bullet 0.2W continuous, 0.4W maximum power handling and 8Ω impedance
- Mylar cone with pleated surround for wide frequency response

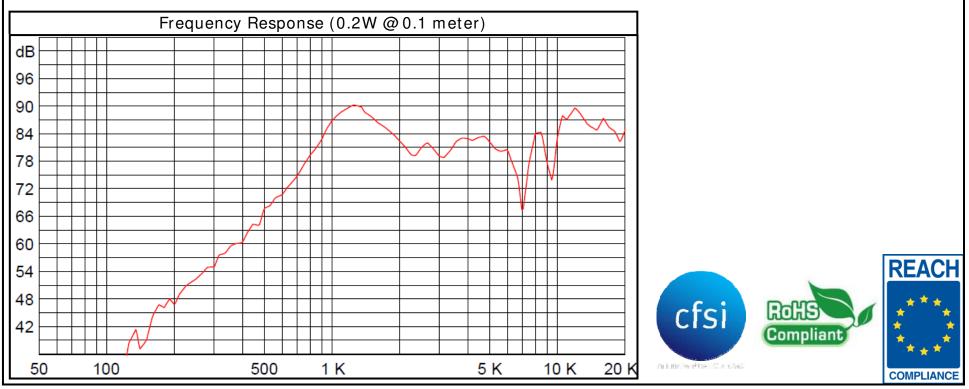




PUI Audio Inc. engages in continuous product improvement. All specifications are subject to change without notice. www.puiaudio.com. Copyright © 2015. Last Revised 4/15.

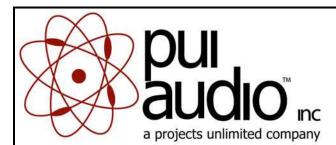

AS01308MR-R 13mm Speaker

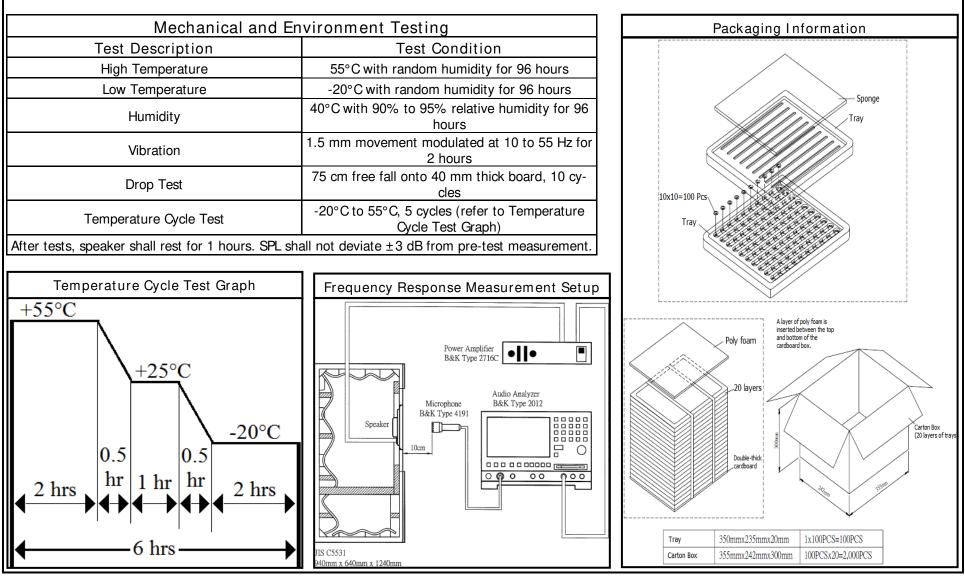

PUI Audio Inc. engages in continuous product improvement. All specifications are subject to change without notice. www.puiaudio.com. Copyright © 2015. Last Revised 4/15.

SPECIFICATIONS			THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR		REVISION HISTORY	
PARAMETERS	VALUES	UNITS	REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED,	R DESCRI RELEASED FROM		DATE APPROVE 8/4/2005
	0.2	W	INC. IS PROHIBITED.	REVISED TO INVENTOR 3		10/30/2008 B.R.
MAX INPUT POWER	0.4	W	©2003, Projects Unlimited Inc.	REVISED TOLERANCE	S AND ROHS STATUS	10/9/2013 M.L.
MPEDANCE	8 ± 15%	OHM				
OUTPUT SPL @ 0.2W/0.1M (AT 1.5, 2.0, 2.5, 3.0 kHz)	86 ± 3	dBA				
DISTORTION (MAX.)	10%	-				
RESONANT FREQUENCY	1,050 ± 20%	Hz			5	
REQUENCY RANGE	1,050 ~ 20,000	Hz				- 0
HOUSING MATERIAL	METAL	-				
CONE MATERIAL	MYLAR	-				2
MAGNET MATERIAL	Nd-Fe-B	-		2±0.2		
OPERATING TEMPERATURE	-20 ~ +55	°C				
WEIGHT	0.7	grams		1±0.2		
NOTES:			UNLESS OTHERWISE	Designed by Date C	Checked by Date Approved	d by Date Drawn Date
NOTES: I. ALL DIMENSIONS ARE IN	N MILLIMETERS.		SPECIFIED:		Dhecked by Date Approved B.R. 8/4/2005 E.P.	
		or withdf	SPECIFIED: DIMENSIONS ARE IN		B.R. 8/4/2005 E.P.	. 8/4/2005 10/30/200 08MR-R