



OC35506P

3550-3700 MHz

CBRS Low PIM Omnidirectional Antenna

Laird Connectivity's OC35506P is a Low PIM omnidirectional, collinear antenna especially designed to complement interior or exterior mounted wireless networks operating over the CBRS band 3550-3700 MHz. An integrated RF connector is embedded in the antenna base cap for direct AP mounting. It comes complete with mast mounting hardware and includes a UV-stable radome enclosure that provides years of use without degradation to either mechanical properties or aesthetics.

FEATURES AND BENEFITS

- Applicable for CBRS solutions
- Indoor/outdoor usage
- Weatherproof UV stable radome
- Direct to radio or mast/pole mounting
- Mast mounting hardware included
- Low PIM rated with an IP67 Ingress Protection rating.
- Conformance to RoHS

ELECTRICAL SPECIFICATIONS

Antenna Model	OC35506P
Number of Ports	1
Operating Frequency (MHz)	3550-3700
VSWR, Avg.	1.4:1
VSWR, Max.	1.5:1
Peak Gain, Avg. (dBi)	6.1
Peak Gain, Max. (dBi)	6.8
Passive Intermodulation @ 2 x 10 Watt (dBc)	< -150
Azimuth 3 dB Beamwidth	360°
Nominal Impedance (Ohms)	50
Polarization	Linear, Vertical
Max Power/port- Ambient 25oC (W)	10

MECHANICAL SPECIFICATIONS

Dimensions - diameter x height - mm (inches)	25.4 x 257 (1.0 x 10.0)
Weight - kg (lbs.)	0.12 (0.27)
Radome Material	PC, UL94 V-0, UV Stable

ENVIRONMENTAL SPECIFICATIONS

Operating Environment (Indoor or Outdoor)	Indoor and Outdoor
Operating Temperature - °C (°F)	-30 to +70°C (-22 to +158°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Wind Rating (*) Operational, kph (mph)	193 (120)
Wind Rating (*) Survival, kph (mph)	219 (136)
Ingress Protection	IP67
Material Substance Compliance	RoHS Compliant

* Based on static load by wind at maximum velocity


CONFIGURATION

PART NUMBER	CONNECTOR
OC35506P-FNF	Type N female

PACKAGING INFORMATION




PACKAGED DIMENSIONS	CARTON	MASTER CARTON	AIR PALLET	OCEAN PALLET
Number of Antennas	1	77	462	616
Height- cm (in.)	3.4 (1.3)	42.2 (16.6)	141 (55.5)	183 (72.1)
Length- cm (in.)	43.5 (17.1)	74.4 (29.3)	120 (47.3)	120 (47.3)
Width- cm (in.)	10.2 (4.02)	44.7 (17.6)	80 (32)	80 (32)
Shipping Weight - kg (lb.)	0.64 (1.4)	50.2 (111)	313 (691)	414 (912)

MECHANICAL DRAWING



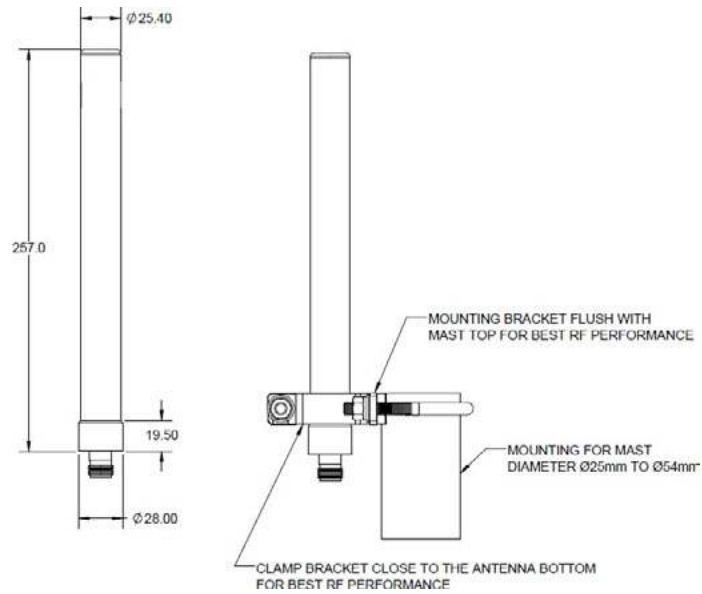


RADIATION PATTERNS




3550 MHz

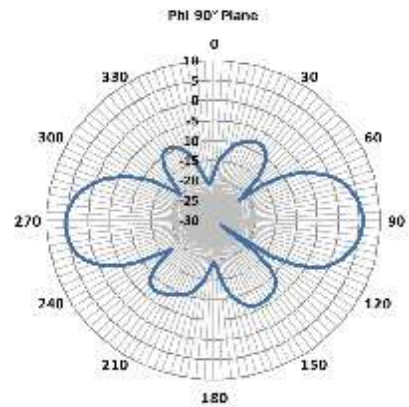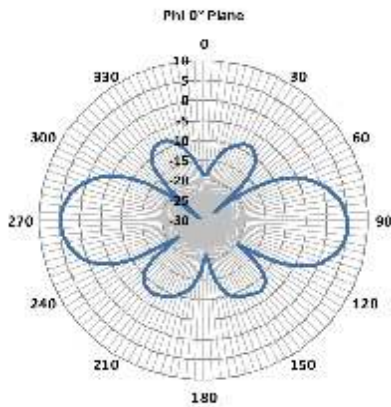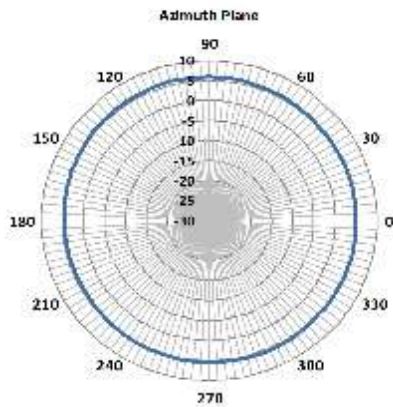




3600 MHz

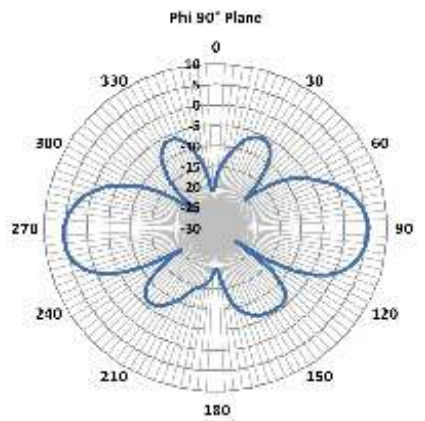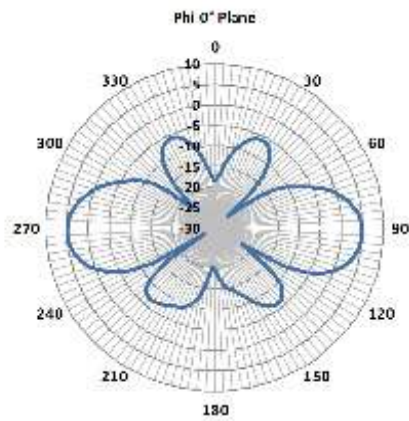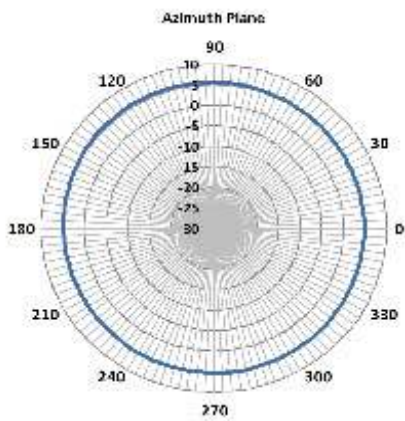

3650 MHz

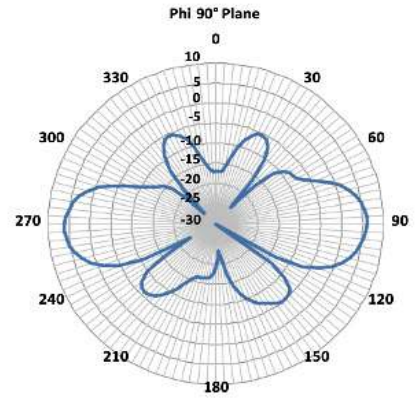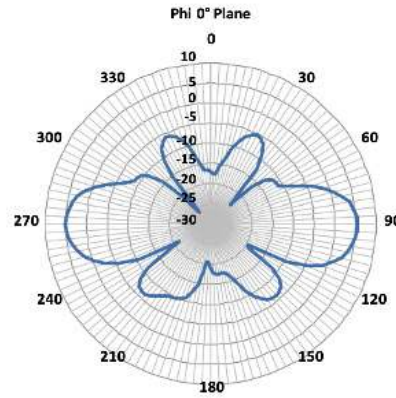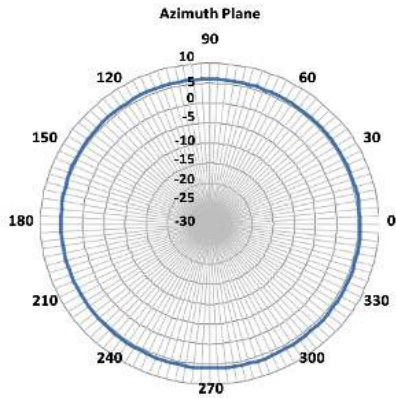

3700 MHz

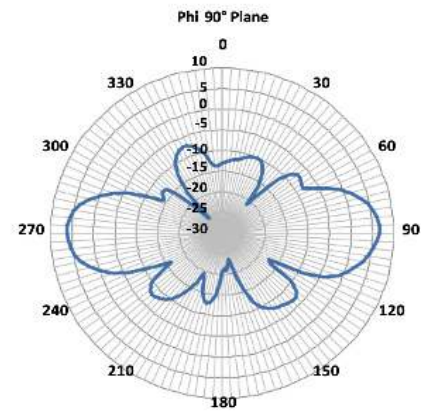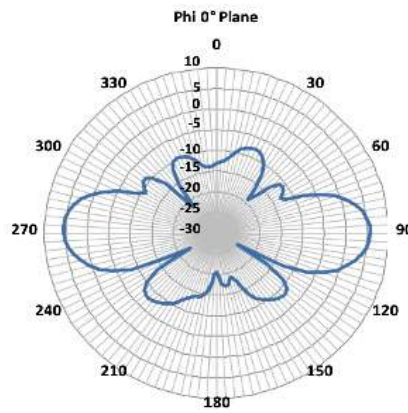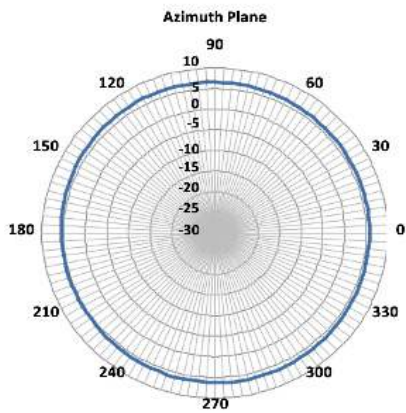

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original