





插頭部件 (Plug Component)			頭部剥皮尺寸 (Dimensions)			線材規格 (Wire Styles)	尾部剥皮尺寸 (Dimensions)			端子規格 (Terminal Style)	
顏色(Color)	零件描述(Component)	Qty.	內剥(Strip)	分線(Split)	顏色(Color)	SPT-1 18AWGx2C 105°C 黑色(Black) Length : 2743.2±50 (108"±2")	分線(Split)	內剥(Strip)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)
35P 黑色 (Black)	ME-101 (1-15P, Non-Polarized)	1	6 ⁺¹ ₋₀	15 ± 2	圓邊 (L) (Smooth)		50.8±5	6.35±3	圓邊 (L) (Smooth)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	(6.3/6.3) 非極性端子97661-1 (Polarized Solid Blades)	2	6 ⁺¹ ₋₀	15 ± 2	毛邊 (N) (Ribbed)		50.8±5	6.35±3	毛邊 (N) (Ribbed)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	

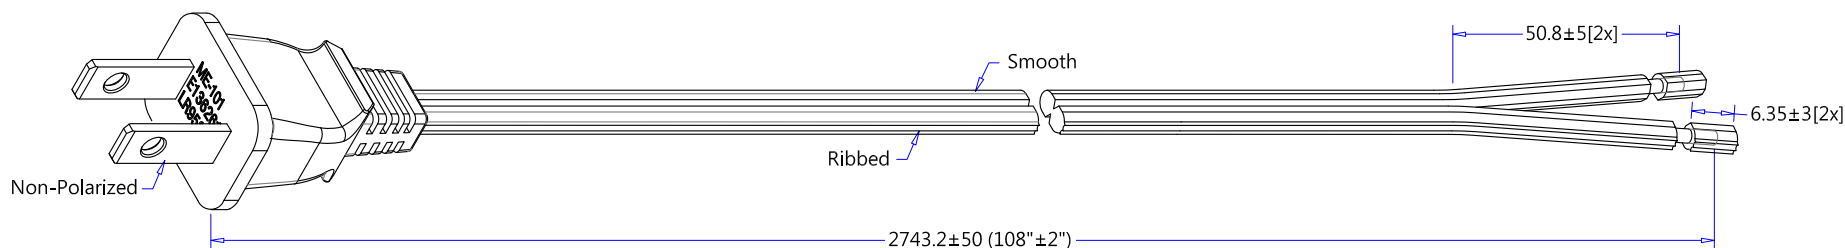

ME-101 (1-15P, Non-Polarized)
(Dimensions of Plug Face)



SPT-1 18AWGx2C 截面圖
(Wire Cross-Section)

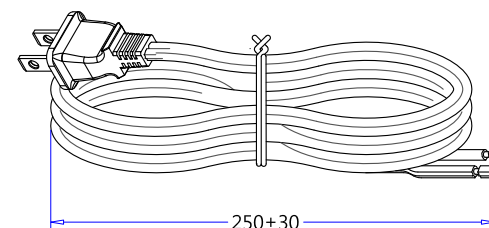

B-C3 扎線圖示 (Tied Loop Hank Detail)

REV	DATE	REVISE CONTENT
A	08/30-2012	The first edition is issued and drawing.
F		

- NOTE:**
- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
 - Insulation Resistance Test : DC 500/min>100 meg-ohm.
 - Continuity & Polarization Test : No short circuit, break circuit, displacement.
 - Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
 - Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
 - All material according to Non-toxic standard.(Material must be RoHS compliant.)
 - "FMC" logo maybe present on 1-15P.

線材印字 (Wire Printed)		充實, 油墨印字 (Un-Fillers, Printing Ink)		CnC Tech, LLC Industrial Cable and Connector Technology				
包裝方式 (Packing)		DRAWN						CUSTOMER
Tied Hank	See Hank Detail	Chu8.		P/N No.		800-1809-2-SPT1-BL-0009F		
Carton Size	480 x 320 x 180	DATE		MATERIAL		PVC	UNIT	mm
Pack Number	100pcs/ <small>UL Laster Labels</small>	08/30-2012		Customer Approval				
Carton Print	See Purchase Order	TYPE		DRAWING NO.				
		NEMA 1-15P Non-Polarized to ROJ(S&R) Power Supply Cord		098MM1006				
		REV		A				

業務校閱:

品質校閱: