
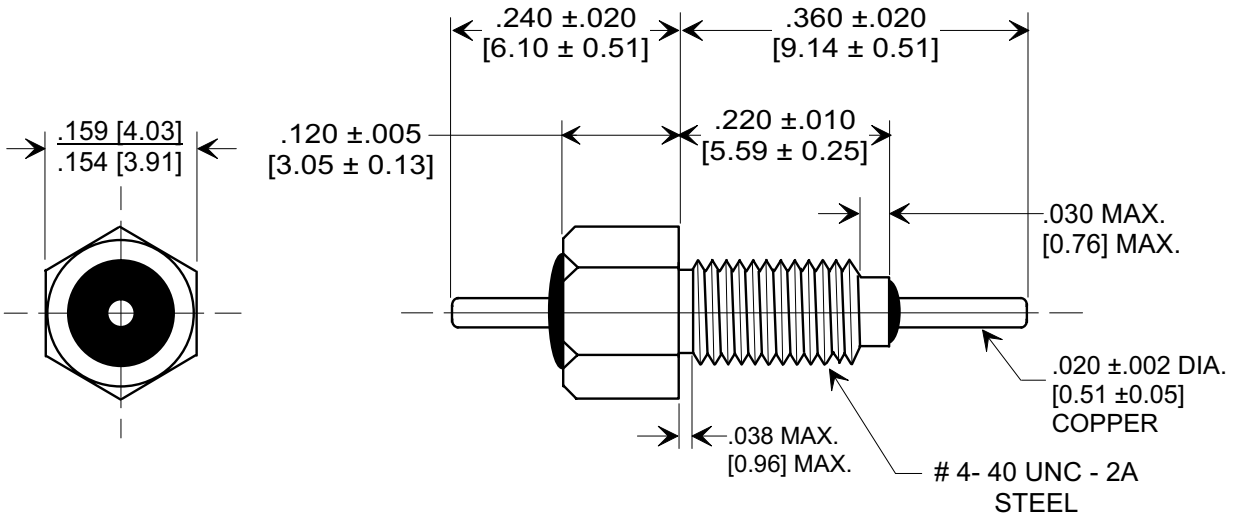




# MARKETING SALES DRAWING

Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



### MOUNTING HARDWARE

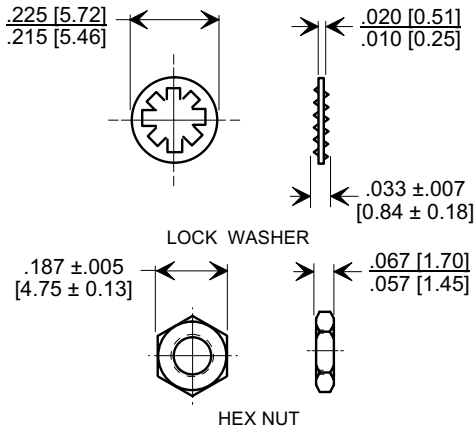

### NOTES:

- TUSONIX STANDARD PART NUMBER: 4400-007.  
TUSONIX RoHS COMPLIANT PART NUMBER: 4400-007 LF.  
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- LEAD, BUSHING, AND MOUNTING HARDWARE: SILVER PLATED.
- PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- OPERATING TEMPERATURE RANGE : -55°C TO +125°C.
- MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C.
- SUPPLIED WITH HEX NUT AND INTERNAL TOOTH LOCK WASHER.
- MAX. RECOMMENDED MOUNTING TORQUE - 2.0 lb.-in. [.226 Nm].

1,000	GMV	300	200	10 G Ω	500	10	----	5	20	35	45
CAP.(pf)	TOLERANCE	85°C	125°C	I.R. MIN. @ 100 (VDC.)	DWV (VDC)	DC CURRENT (AMPS)	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220									

<b>REVISION RECORD</b> Original Release C.O. REDRAWN & REVISED ADDED 008,009. E.C. 05-30-90 <b>5261</b> VARS 005,006,007 & 1MHZ COLUMN ADDED. L.E. 11-07-90 <b>5591</b> RDN TO COMP FMT & ADDED METRIC. S.M. 11-08-01 <b>20000926-3-01</b> REVISED DWG. DRAWING MADE FOR EACH VAR. S.M. 12-02-02 <b>20021125-1-08</b> 10 (AMPS) WAS 5 (AMPS) L.E. 06-23-04 <b>20040621-1-08</b> ADDED AND REVISED NOTES. S.M. 12-14-05 <b>20051122-2-09</b>	--TOLERANCES-- Unless Otherwise Specified		Title <b>BUSHING STYLE EMI FILTER</b>	
	DECIMAL ± NOTED		Drawn S.M. 11-07-01 Scale 5 X	
	ANGLES ±		Approved B.Mc 11-07-01	
	<b>TUSONIX</b> TUCSON, ARIZONA		<b>A</b> <b>4400-007</b>	