


# Power Triple Lock TE Internal #: 1969688-2 Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 2 Position, 6 mm [.236 in] Centerline, Printed Circuit Board, Power Triple Lock

#### View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > POWER TRIPLE LOCK Header, Standard Temperature

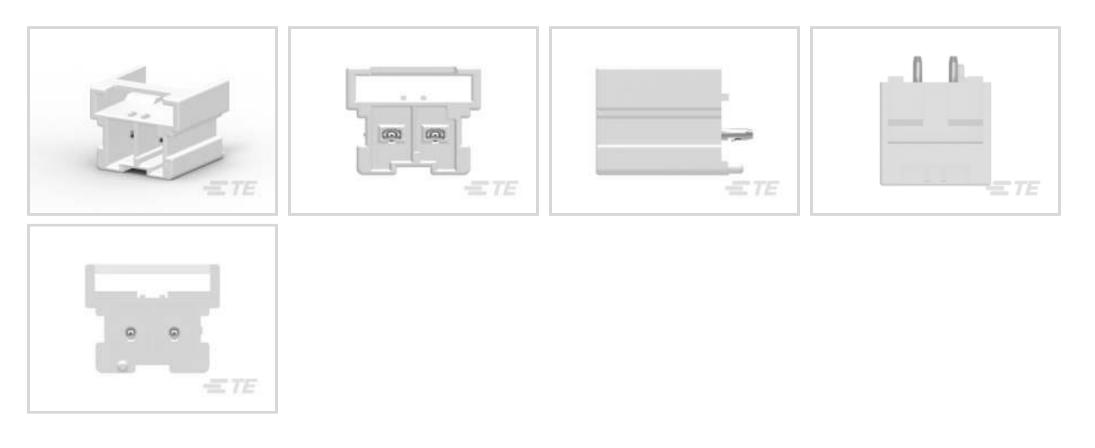

Rectangular Power Connector Type: Header

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 2

Centerline (Pitch): 6 mm [.236 in ]

### All POWER TRIPLE LOCK Header, Standard Temperature (8)

# Features

# **Product Type Features**

Header Type	Fully Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Loaded Positions	2
Number of Positions	2
PCB Mount Orientation	Vertical
Number of Power Positions	2
Number of Rows	1

Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 2 Position, 6 mm [.236 in] Centerline, Printed Circuit Board, Power Triple Lock



# **Electrical Characteristics**

Operating Voltage	600 VDC
Body Features	
Connector & Keying Code	A
Contact Features	
Contact Layout	Inline
Contact Mating Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	20 A
Contact Retention Within Housing	With
Contact Type	Pin
PCB Contact Termination Area Plating Material	Pre-Tin
Termination Features	
Termination Method to Wire & Cable	Crimp
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
PCB Mount Alignment Type	Peg
Mating Retention	With
PCB Mount Alignment	With
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	6 mm[.236 in]
Housing Color	Natural
Housing Material	PBT GF
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Identification Marking	
Circuit Identification Feature	With

Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 2 Position, 6 mm [.236 in] Centerline, Printed Circuit Board, Power Triple Lock



### **Industry Standards**

Glow Wire Material Rating	Material with GWFI 850°C
UL Rating	Recognized
Agency/Standard	UL, VDE
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Carton
Other	
Power Connectors Comment	Complies with IEC 61984 Specification
Position Locations Omitted	0
Product Compliance	
Product Compliance For compliance documentation, visit the product page on TE.com>	
	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	·
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant No Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233)

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 2 Position, 6 mm [.236 in] Centerline, Printed Circuit Board, Power Triple Lock




# Compatible Parts





# Also in the Series | Power Triple Lock

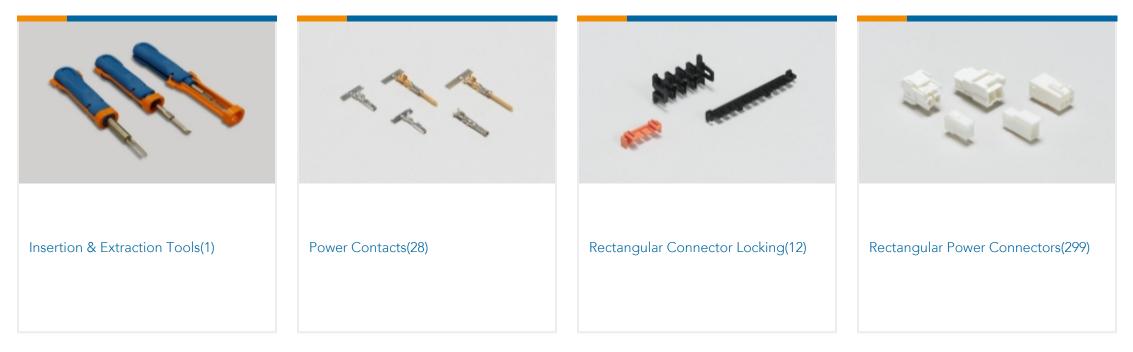

# **Customers Also Bought**

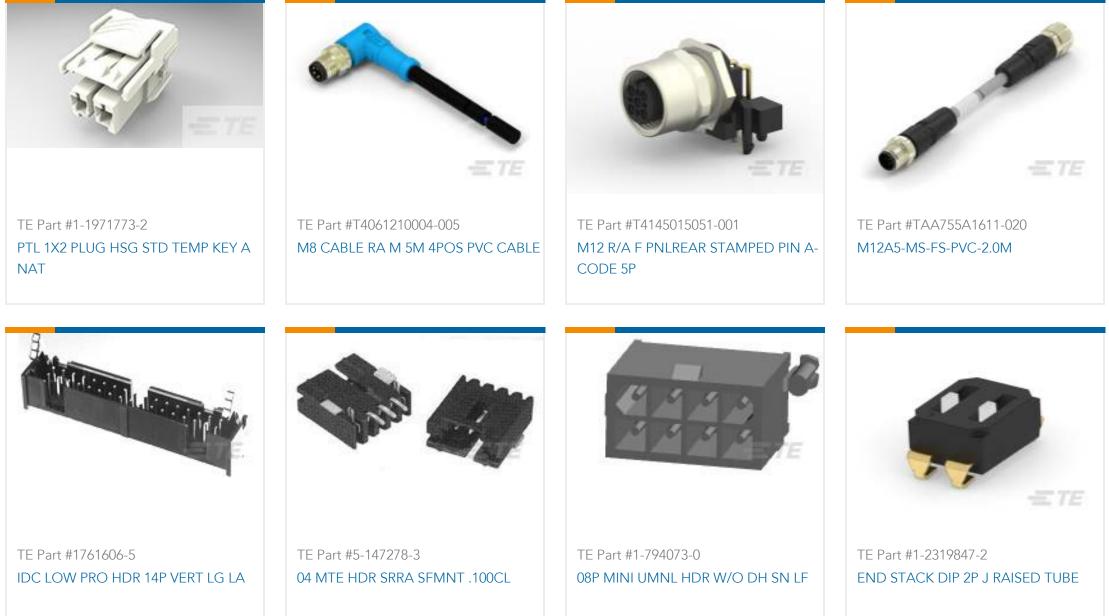

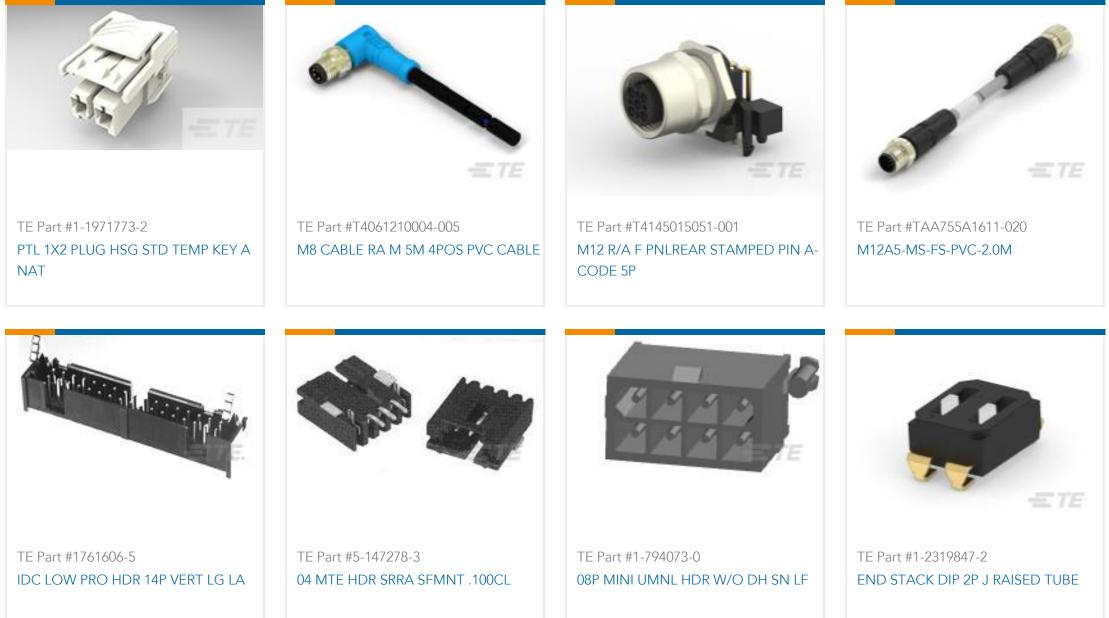


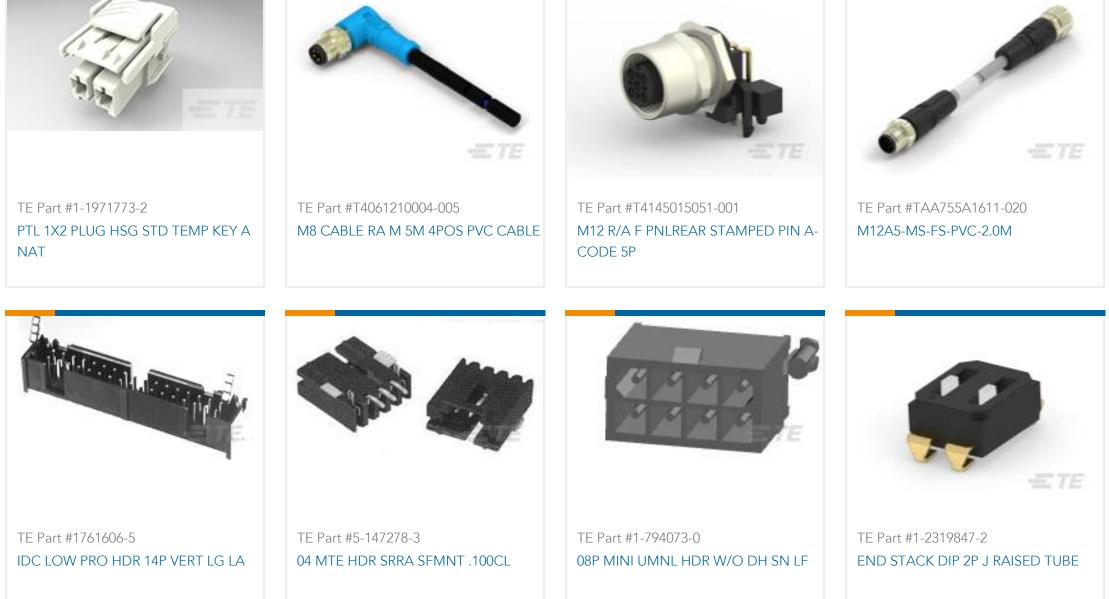



Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 2 Position, 6 mm [.236 in] Centerline, Printed Circuit Board, Power Triple Lock



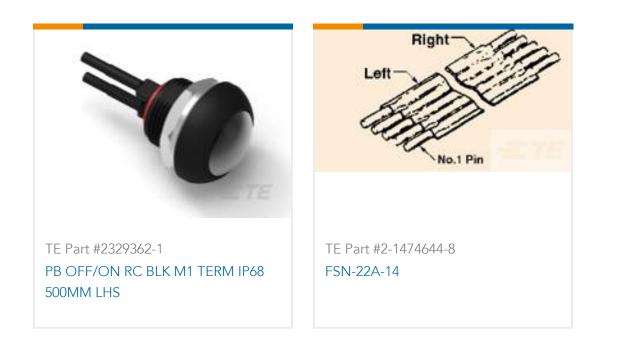

# Documents

# Product Drawings PTL 1X2 PCB HEADER VERT STDTMP KEY A NAT

English

### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1969688-2\_B.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1969688-2\_B.3d\_igs.zip

English

Customer View Model

# ENG\_CVM\_CVM\_1969688-2\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 9-1773465-1Power Triple Lock QRG

English

Product Specifications Application Specification

English

Agency Approvals VDE Certificate

English

**VDE** Certificate

English