

63730 PRODUCT DETAILS

| <i>Property</i> | <i>Details</i> |
|------------------|--------------------------------------|
| <i>Height</i> | 2.25 in (57.15 mm) |
| <i>Width</i> | 3.00 in (76.2 mm) |
| <i>Perimeter</i> | 37.15 in |
| <i>Weight</i> | 2.9 lbs per foot (4.32 kg per meter) |
| <i>Material</i> | 6063-T5 Aluminum Extrusion Alloy |




THERMAL DATA

Natural Convection: 1.88 based on 70 C temp rise above ambient.

Thermal resistance is calculated based on a single 1" (25.4mm) square heat source centered on the heat sink. If you have distributed loads, then you can expect 10% better performance in natural convection and 20% better performance in forced convection.

Natural Convection

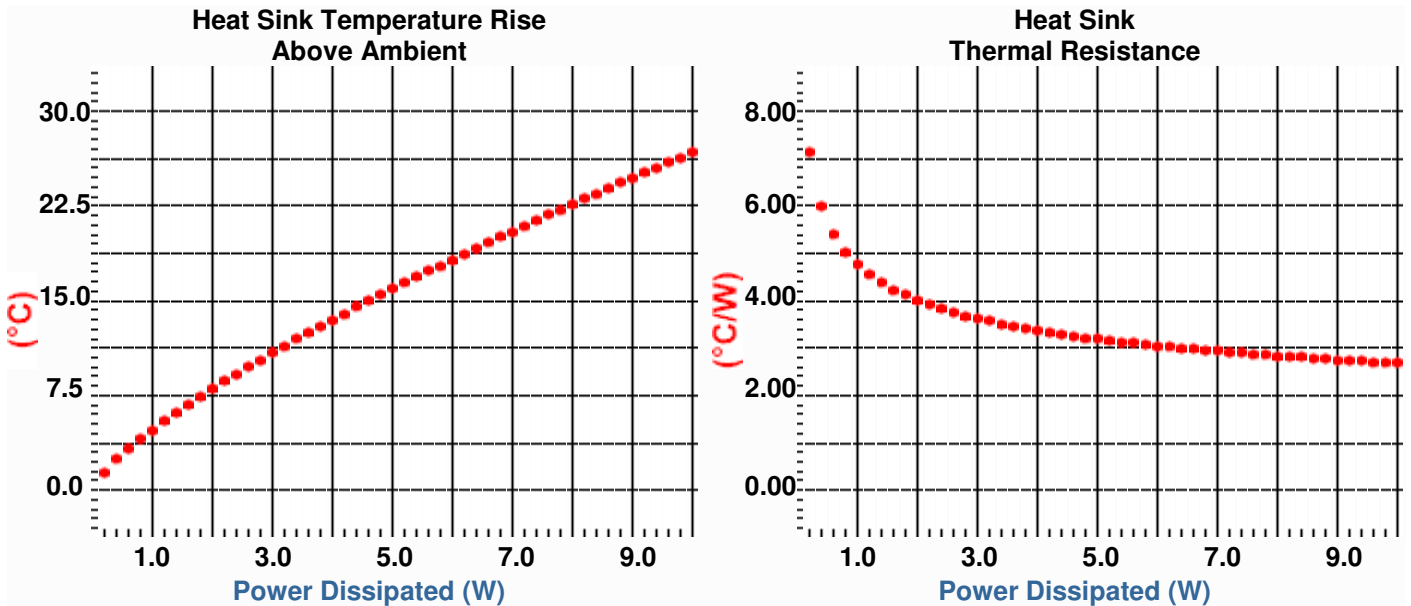

Forced Convection

