


PART NO. 92001-0085
 DWG. NO. SD-92001-159

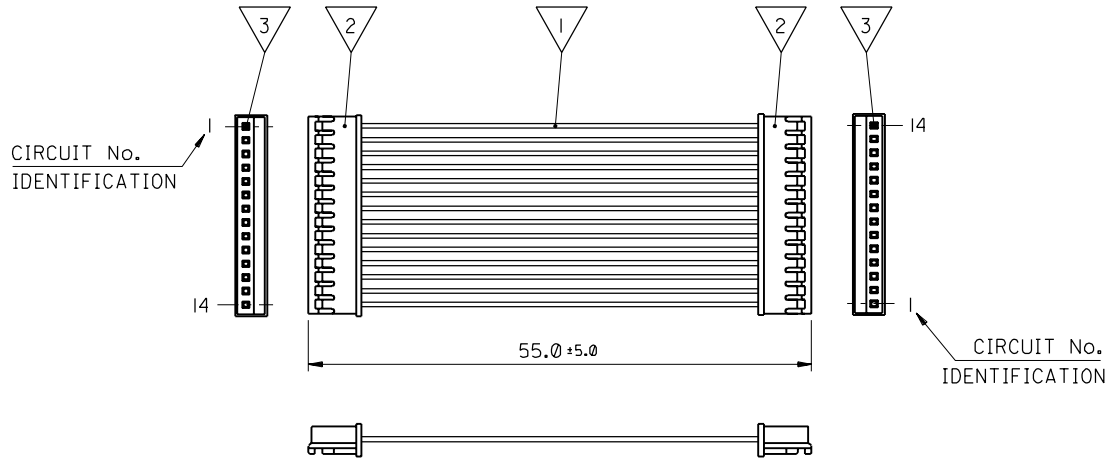

CABLE SPECIFICATION	
CONDUCTOR:	
- MATERIAL	TINNED CU.
- A.W.G	26
- STRANDING QTY/MM	19/0.1
INSULATION:	
- MATERIAL	PVC (LIY)
- NOM WALL THICKNESS	0.25
- COLOUR	RED
- OUTSIDE DIAMETER	1.00±0.05mm
ENVIRONMENTAL SPEC:	
- TEMPERATURE RATING	-40°C TO +85°C

WIRING DIAGRAM

14 CKT. CONNECTOR	CABLE CONNECTION	14 CKT. CONNECTOR
CIRCUIT No.	CONDUCTOR	CIRCUIT No.
1	RED	14
2	RED	13
3	RED	12
4	RED	11
5	RED	10
6	RED	9
7	RED	8
8	RED	7
9	RED	6
10	RED	5
11	RED	4
12	RED	3
13	RED	2
14	RED	1

NOTES:

- SEE CUSTOMER SPECIFICATION No. DRS00001-EN.
- HARNESS TO BE 100% ELECTRICALLY TESTED.
- SUPPLIER OR CUSTOMER APPROVED EQUIVALENT.
- PARTS TO BE PACKED LOOSELY IN BAGS.
- OPERATION TEMP. RANGE OF THE CABLE ASSEMBLY IS -40°C TO +85°C.

BILL OF MATERIALS

NO.	QTY	SUPPLIER	DESCRIPTION	PART No.
1	14	MOLEX	26 AWG CABLE, RED	99036-0255
2	2	MOLEX	HOUSING, PITCH 1.5mm	87439-1400
3	28	MOLEX	CRIMP TERMINAL	87421-0000

ORIGINAL RELEASE EC NO. 2000-0244 DRWN: P.FINN 00/0629 CHK: / / / / APPR: / / / / A2	DESCRIPTION MAJOR = CRITICAL = C =	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 2 : 1	DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH	DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY	SHT REV	
		4 PLACES ±0. ±.		DRAWN BY & DATE PFINN 99/09/22	TITLE: DCH-12 ASSEMBLY			REVISE ON CAD ONLY
		3 PLACES ±0. ±.		CHECKED BY & DATE BENRICH 99/09/22	Molex MOLEX INCORPORATED			
		2 PLACES ±0. ±.		APPROVED BY & DATE MWILHITE 99/09/22	CAD FILENAME	MATERIAL NO. 92001-0085	DRAWING NO. SD-92001-159	SHEET NO. 1 OF 1
1 PLACE ±0. ±.		ANGLUAR: ± 1/2°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						SIZE B		